



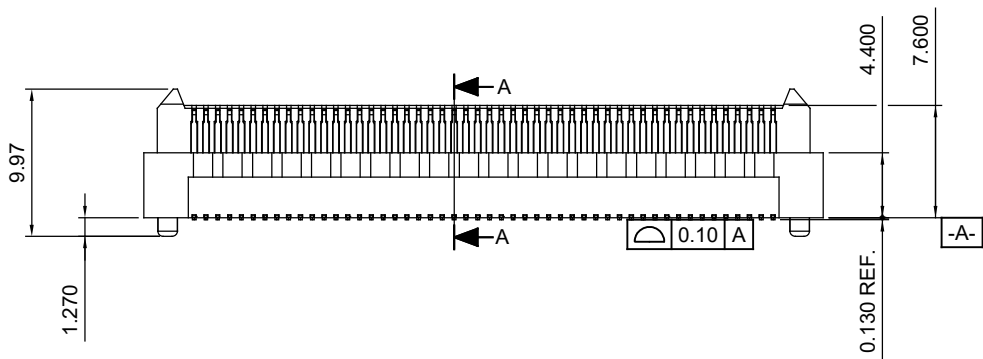


TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.15
.XXX	±0.10

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

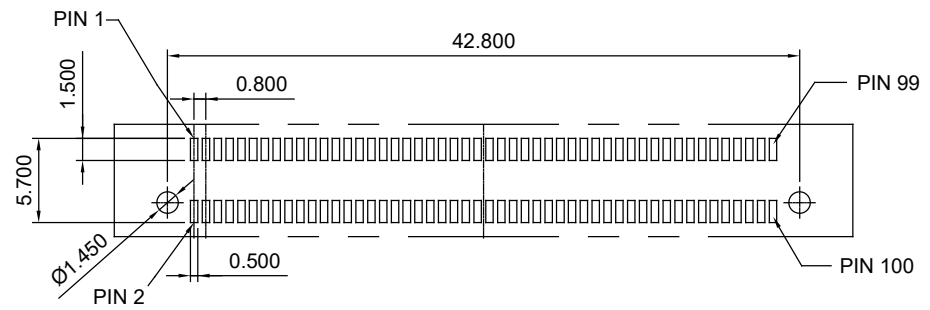

ISSUE NUMBER
ORIGINAL (1)

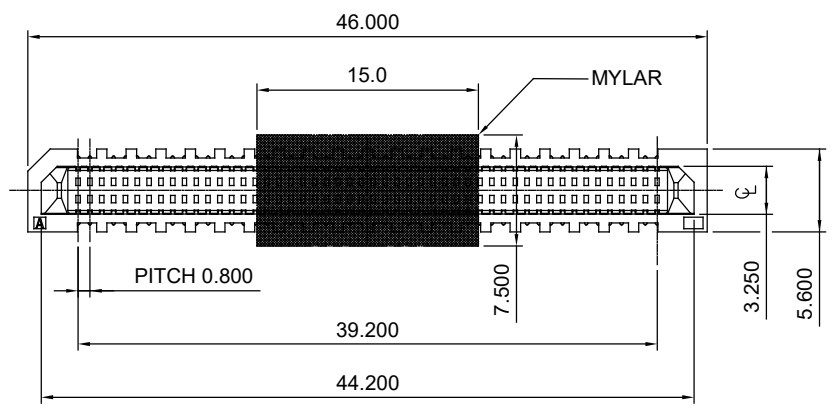

SEC. A-A



NOTES:

MATERIAL:
MYLAR: PE MATERIAL (NO PLATING)
HOUSING: L.C.P SERIES, UL-94V-0
CONTACT: COPPER ALLOY
10µ" GOLD PLATING ON CONTACT AREA
MATTE TIN PLATING ON SOLDER TAIL OVER
NICKEL UNDER PLATING

OPERATION TEMPERATURE: -55°C TO 85°C

ELECTRICAL:
CURRENT RATING: 0.5A
VOLTAGE RATING: 50V AC
INSULATION RESISTANCE: 500MΩ MIN.
CONTACT RESISTANCE: 50MΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 150V AC / 60 SEC.

MARKED : CRITICAL DIMENSION
MARKED DIMENSIONS NEED TO BE MEASURED IN CPK

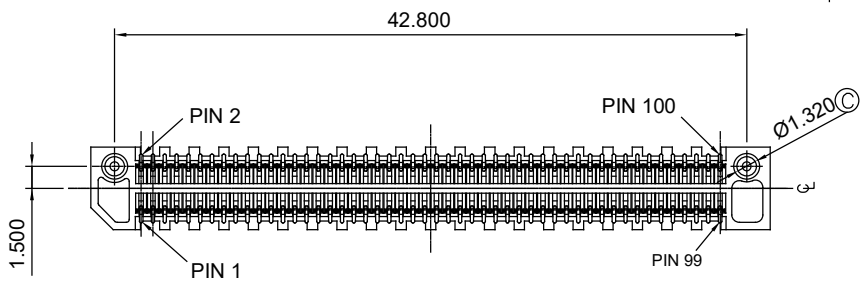

BOARD TO BOARD, 100 CONTACTS,
SMT, ALL LONG PIN, MALE

ACAD REFERENCE NO.: 472-100-529-001	
DRAWN: W.T	DATE: JUNE.28 /2018
CHECKED:	DATE:
SCALE: N.T.S	SHEET 1 OF 1
DRAWING NUMBER: 472-100-529-001	ISSUE
PART NUMBER: 472-100-529-001	1



THIS SERIES FULLY CONFORMS TO
THE EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.

EDAC
EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC., AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.