




REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
D	LEN-920147~50	2008/10/06	Li Xiu Zhi	Change View
E	LEN-040083~87	2010/04/02	Li Xiu Zhi	Change 19.2 to 19.0
F	LEN1710129~33	2017/01/17	Ruru	Change Logo

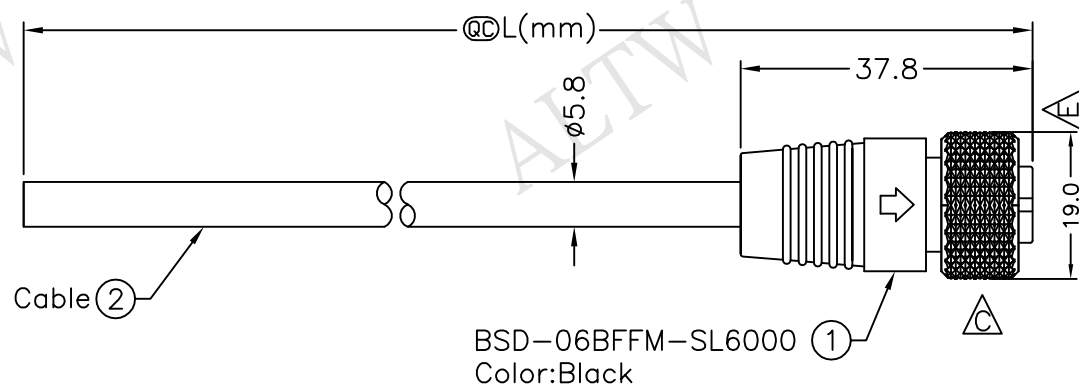


Conn.



BSD-06BFFM-SL6AXX

XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP66
 - * Connector:Nylon+GF ,Black
 - * Female Pin: Copper Alloy,Gold Plated
 - * Cable: Black,UL2464 24AWG*6C+Drain+Al/My, PVC Jacket UV Resistant, OD=5.8mm
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

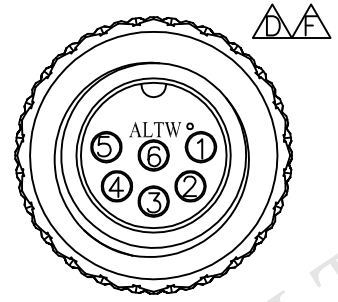

Pin Assignments
Front View

Shield	Drain	地線
6	White	白
5	Red	紅
4	Orange	桔
3	Yellow	黃
2	Green	綠
1	Blue	藍
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard		
	Cable Screw 6Pin F Conn F Pin		
SCALE	Free	SHEET	1 OF 1
REV.	F	SIZE	A4
		@C	:Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2017/01/17
DWG NO	CHECKED BY	DATE
BSD-06BFFM-SL6A <u>XX</u>	Rita	2017/01/17
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.