

SUMMARY

Wires

Low voltage 10



Image is for illustrative purpose only

Series 2P
Termination type Male crimp
IP rating 50
AWG wire size 30.00 - 22.00
Cable Ø 5.30 - 7.20 mm
Status active
Matching parts [CLB.M10.GYMG](#)

Download

[Request a quote](#)
[Eplan](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model CA*: Straight plug with cable collet and nut for fitting a bend relief
Keying No keying
Housing Material PSU (Polysulfone), gray
Weight 10.06 g

Performance

Configuration 2P.M10 : 10 Low V.
Insulator Y: PEEK for crimp contacts
Rated Current 8 Amps

Specifications

Test voltage (kV rms) Contact-contact: 1.45
Air clearance min.: 1.25 mm
Creepage distance min.: 1.25 mm


Others

Endurance (Shell): >1000 mating cycles
Temp (min / max): -50°C / +150°C
F ret (min): 150 N

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

F ret (max): 250 N
 Steam sterilization: 20 times (with potting on rear connection)

DRAWINGS

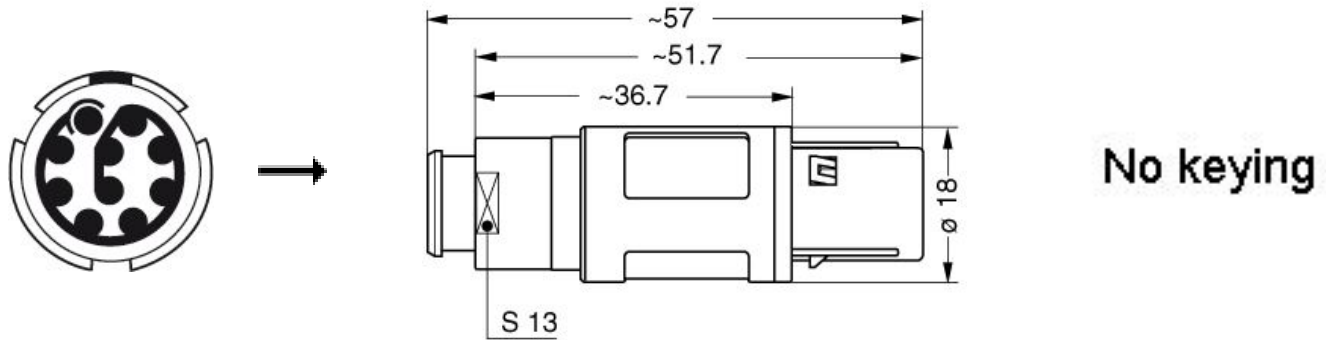

RECOMMENDED BY LEMO

Tools

Crimp Tool:	DPC.91.701.V
Crimp settings:	AWG/Selector = 20-22-24/6-5-5
Positionner:	DCE.91.092.BVC
Extractor:	DCC.09.05B.LAG
Replacement contact:	FGG.2B.560.ZZC

Cables

CMN.10.T22.068QGZE	TPR (medical)	Grey	
CMN.10.T28.053QGZE	TPR (medical)	Grey	
110240	PTFE	White	
110280	PVC	Black	
210140	PVC	Grey	
210240	PVC	Black	
210250	PVC	Grey	
210260	PVC	Black	

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.