

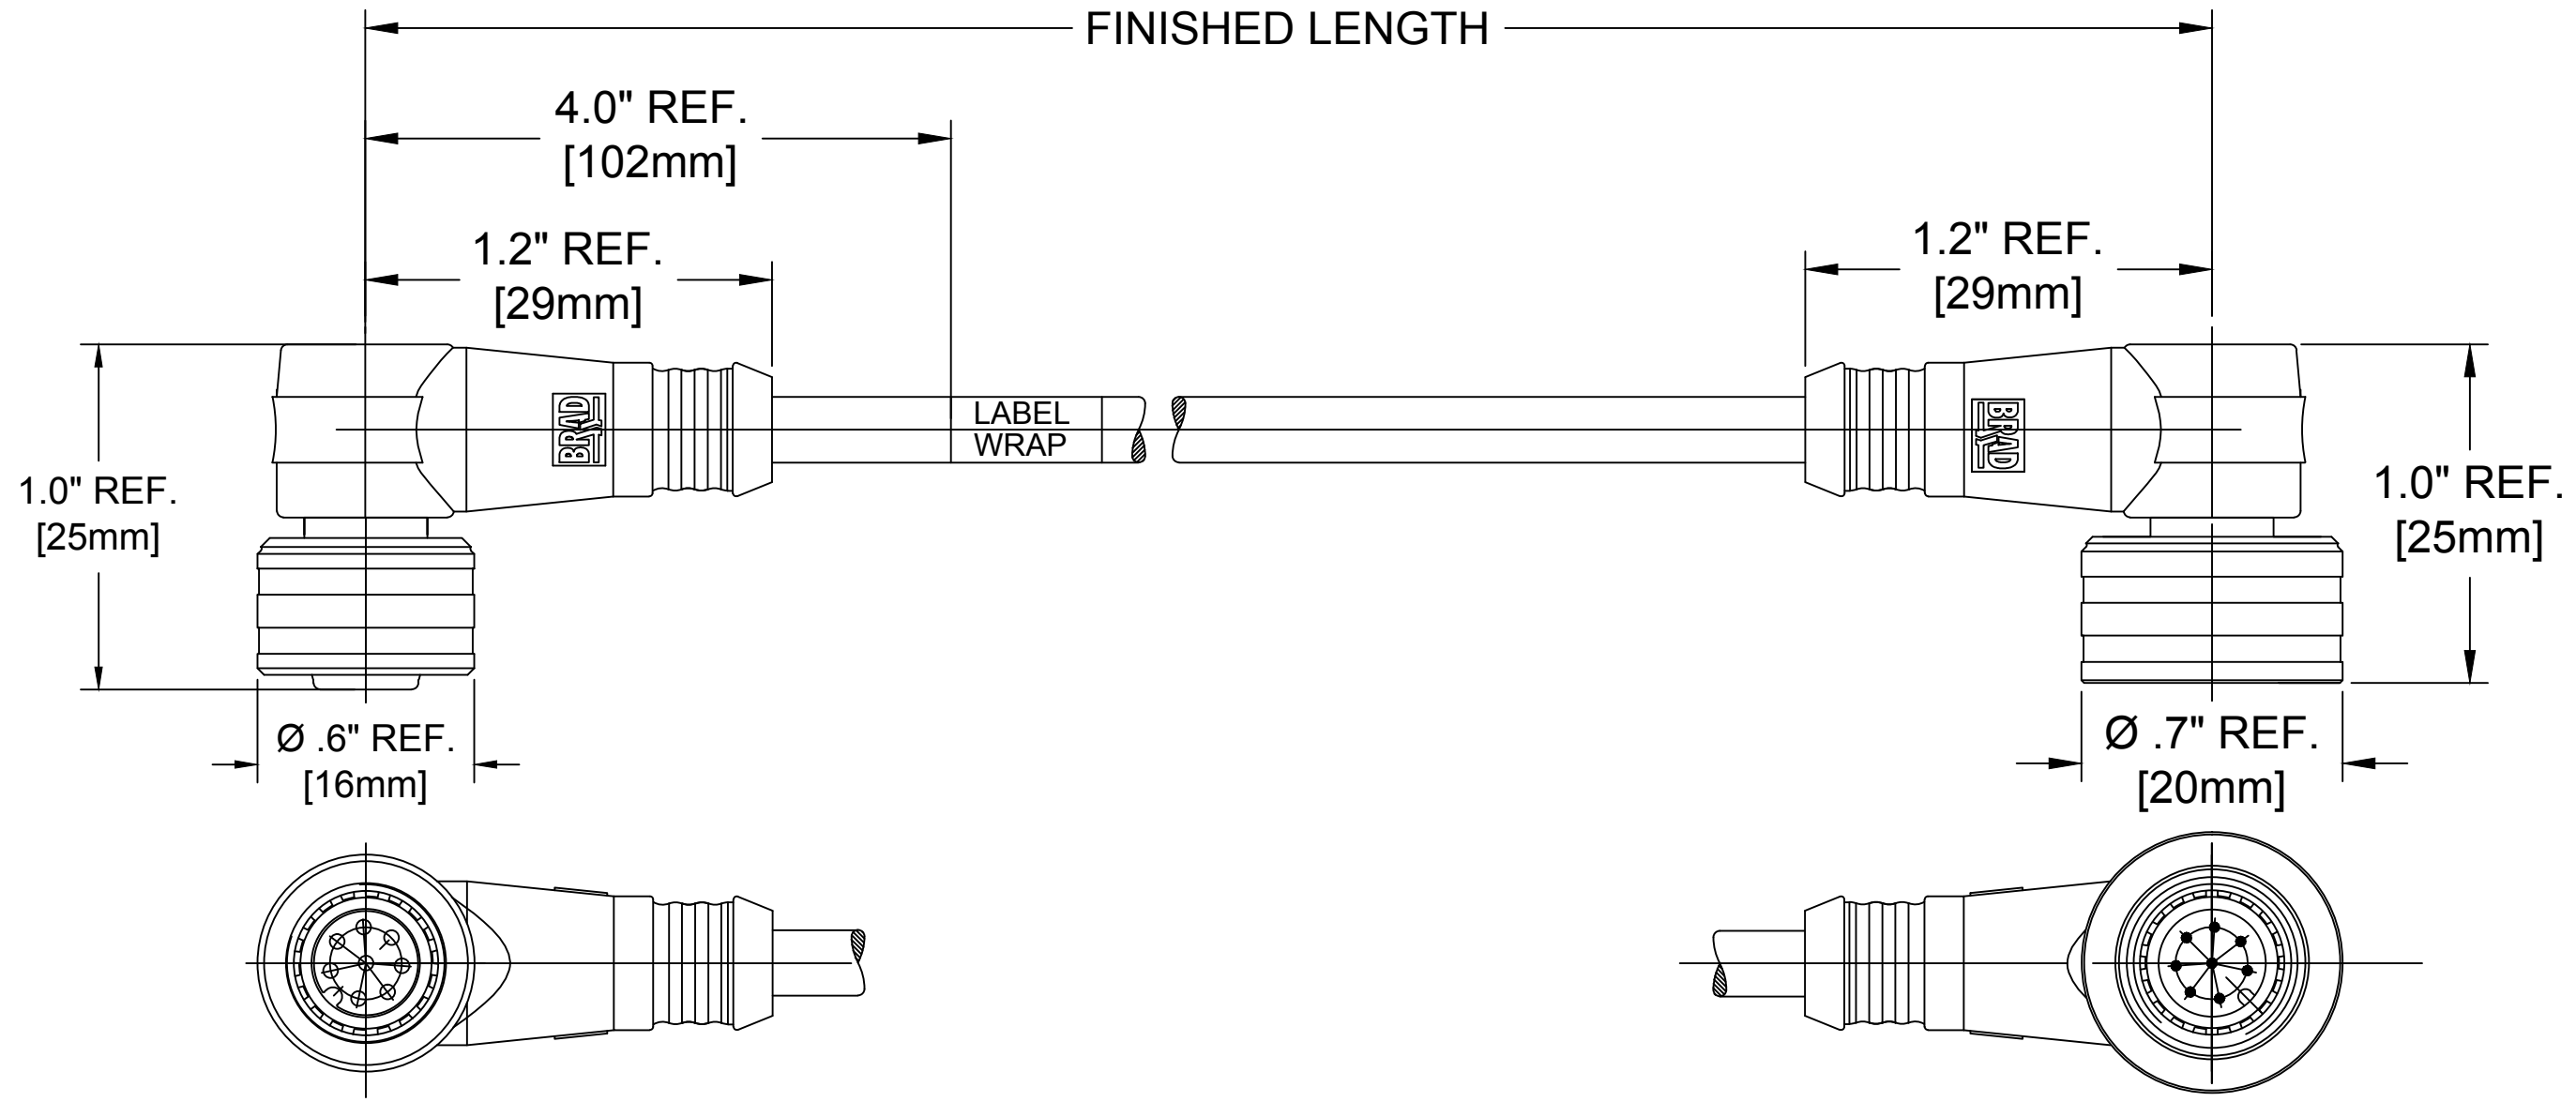


MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH
1200808032	WW8033H08M010	1M +55.6mm -0 [3.3FT. +2.2IN -0]

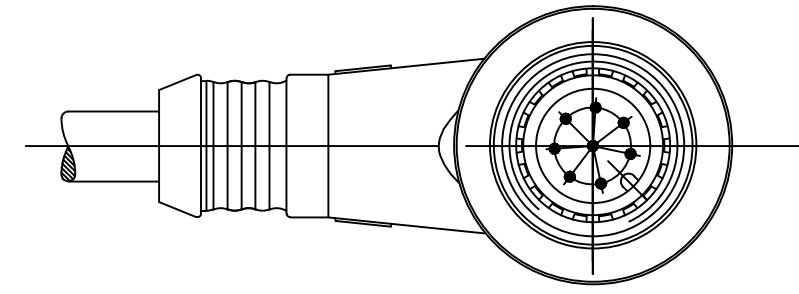


WIRING DIAGRAM

1	WHITE	1
2	BROWN	2
3	GREEN	3
4	YELLOW	4
5	GRAY	5
6	PINK	6
7	BLUE	7
8	RED	8

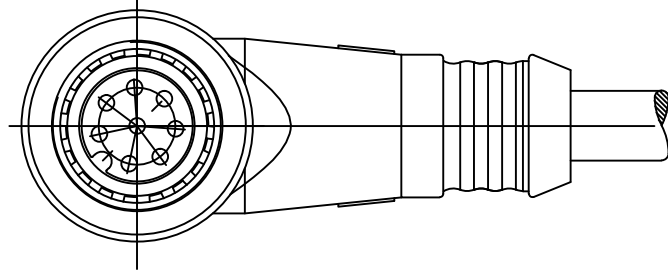

8-POLE

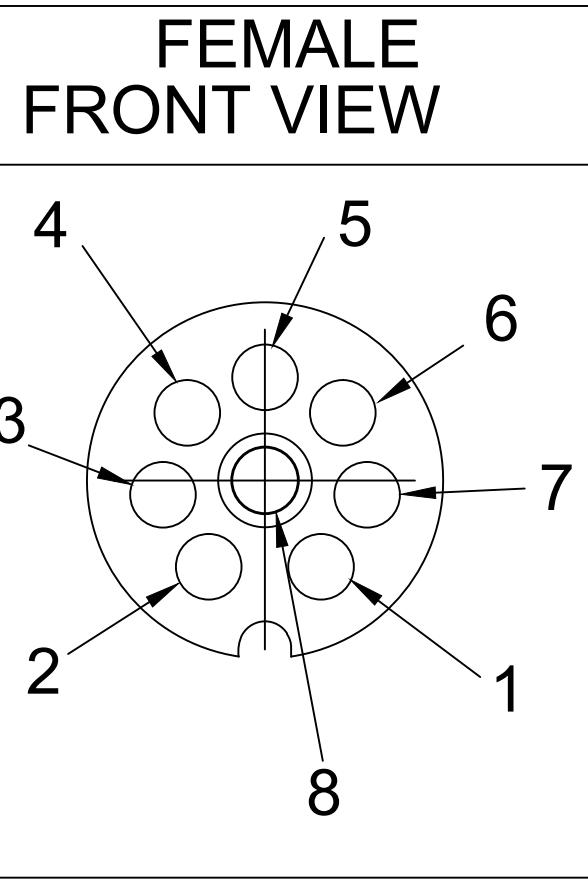


WW8033H08M010

cable type
#24 PUR
BLACK

cable length
010----1 Meter
100----10Meters

8-POLE

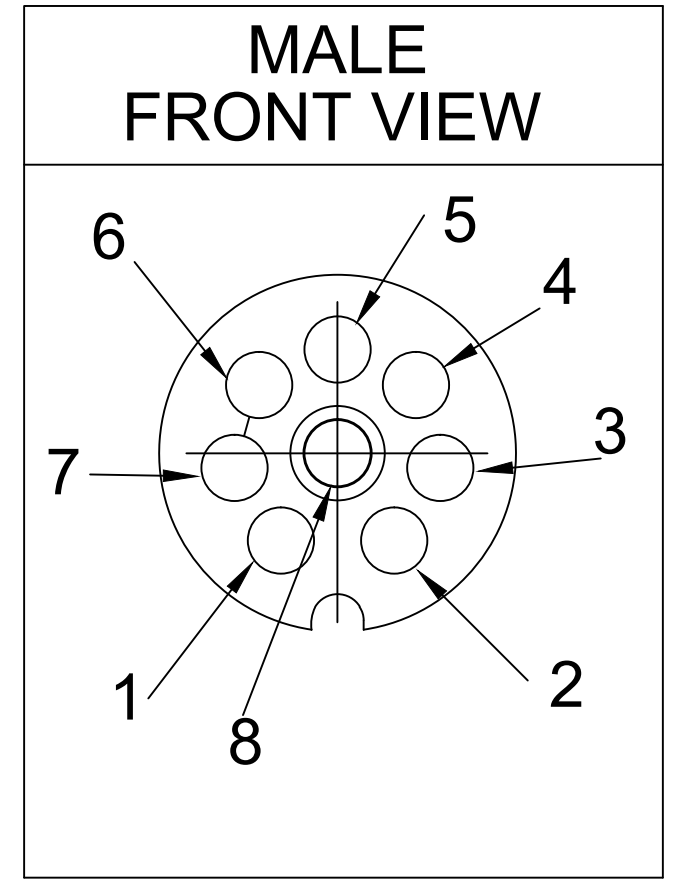

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
INSERT	PUR	BLACK
OVERMOLD	TPU	BLACK
CABLE #24	PUR	BLACK
VOLTAGE RATING:		300V
AMPERAGE RATING:		2A
PROTECTION CLASS:		IP67/68/69K
OPERATING TEMPERATURE:		-30°C / 80°C
CSA CERTIFICATIONS:		FILE NO. LR6837

RELEASE EC NO: IPCG2014-0591 DRWN: GGUSTAFS 2013/09/26 CH'KD: BARDEN APPR: BWOODMAN2013/10/09 A	QUALITY SYMBOL ▽=0 ▽=0 C	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY GGUSTAFS	DATE 2013/09/26	TITLE MICRO CHANGE ULTRA LOCK 8P FEMALE/MALE 90D/90D #24 PUR			
		4 PLACES	±---	±---	CHECKED BY BARDEN	DATE 2013/11/28	MOLEX INCORPORATED SD-120080-076 SHEET NO. 1 OF 1			
		3 PLACES	±---	±.005	APPROVED BY BWOODMAN	DATE 2013/10/09				
2 PLACES	±0.13	±.010	MATERIAL NO. SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
1 PLACE	±0.25	±.020	ANGULAR ±.5°							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										