
REV	CHANGE	DATE	DRN	СНК
	Drawn	12/20/16	SJ	Т





## NOTES:

- 1. Material: Aluminum (QQ-A-225/8B, QQ-A-200/9D) (RoHS Comp.)
- 2. Finish: Nickel QQ-N-290 Class 1 Grade G
- 3. % of Thread for Tapped Holes : Form Tap 55  $\mid$  Cut Tap 65
- 4: Threads are Supplied Cut or Rolled at RAF's Option Unless Noted on Order.
- 5. Threads are to Commercial 2A and 2B Standards per Handbook H-28 (Part 1)
- 6. All Drawing Dimensions are in Inches Unless Noted Otherwise
- 7. ASME Y14.5M 2009
- 8. Unless otherwise specified; Edge Breaks, Radii or Countersinks 0.005-0.015

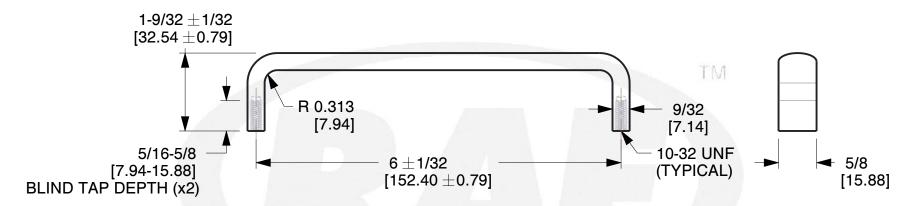

95 Silvermine Rd., Seymour CT 06483 Tel: 203-888-2133, Fax: 203-888-9860 This Drawing is the Property of RAF. It contains confidential, proprietary information that is RAF property. Do not disclose to or duplicate for others except as authorized by RAF.

<u>TOLERANCES</u>				
ALL DIMENSIONS ARE INCHES				
(UNLESS OTHERWISE SPECIFIED)				
METALLIC				
LENGTHS =: 6 INCHES ± 0.005</td				
LENGTH >: 6 INCHES ± 0.010				
DIAMETERS: ± 0.005				

NON-METALLIC
LENGTH: ±0.010 DIAMETERS: ±0
INTERNAL THREADS:
MINIMUM THREAD DEPTH

COMPONENT	ПАІЛІ	ANDLES		
		SCALE		
		0.63		
OVAL INTERNAL THREAT	D HANDLE	SHEET		
		1 of 1		

HANDI EC

COMPONENT