


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

1206 X7R 2.2nF 50V(1206B222K500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [nF]	2.2(±10%)
DF	≤ 2.5%
IR [G-ohm]	> 10

3. Impedance/ESR-Frequency


(Equipment: 4287A)

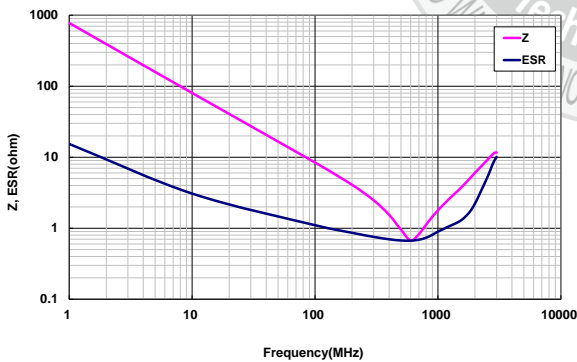

5. Capacitance – DC Voltage Characteristics


(Equipment: 4284A; DC charge 60±5sec)

25V : 3.33% ; 50V : 3.94%

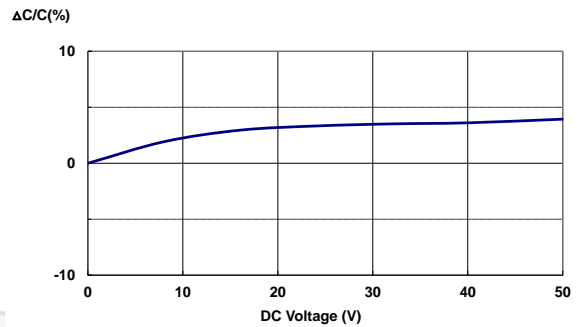

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

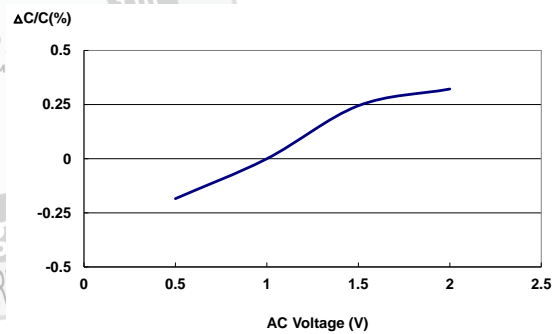

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

