
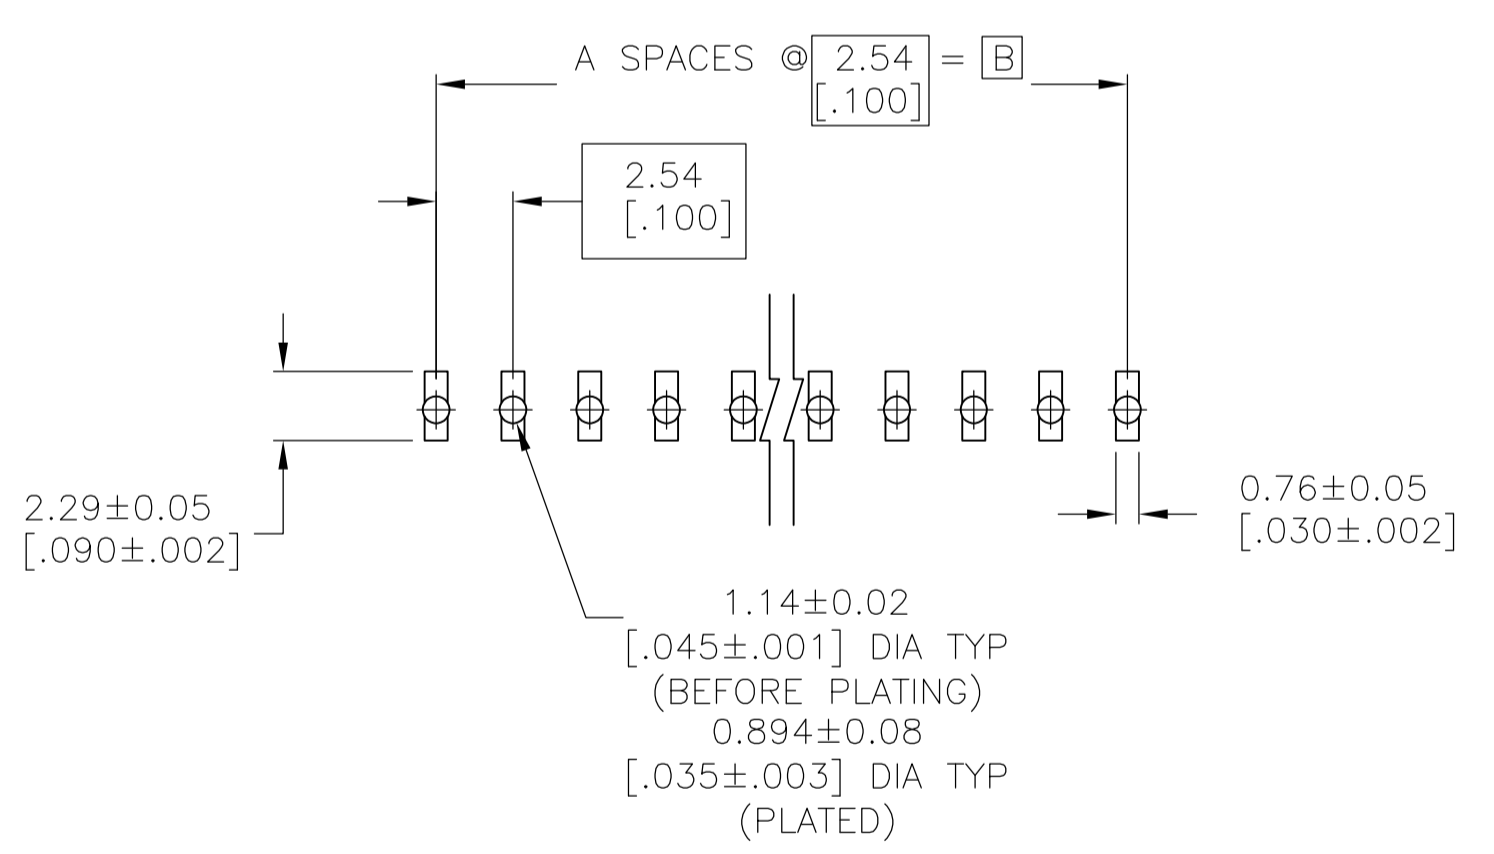


1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
3. 0.000381 [.000015] GOLD IN CONTACT AREA, 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
4. HOUSING: LCP, COLOR-BLACK. POSTS: COPPER ALLOY.
5. 0.000381 [.000015] GOLD IN CONTACT AREA, 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
6. OBSOLETE
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

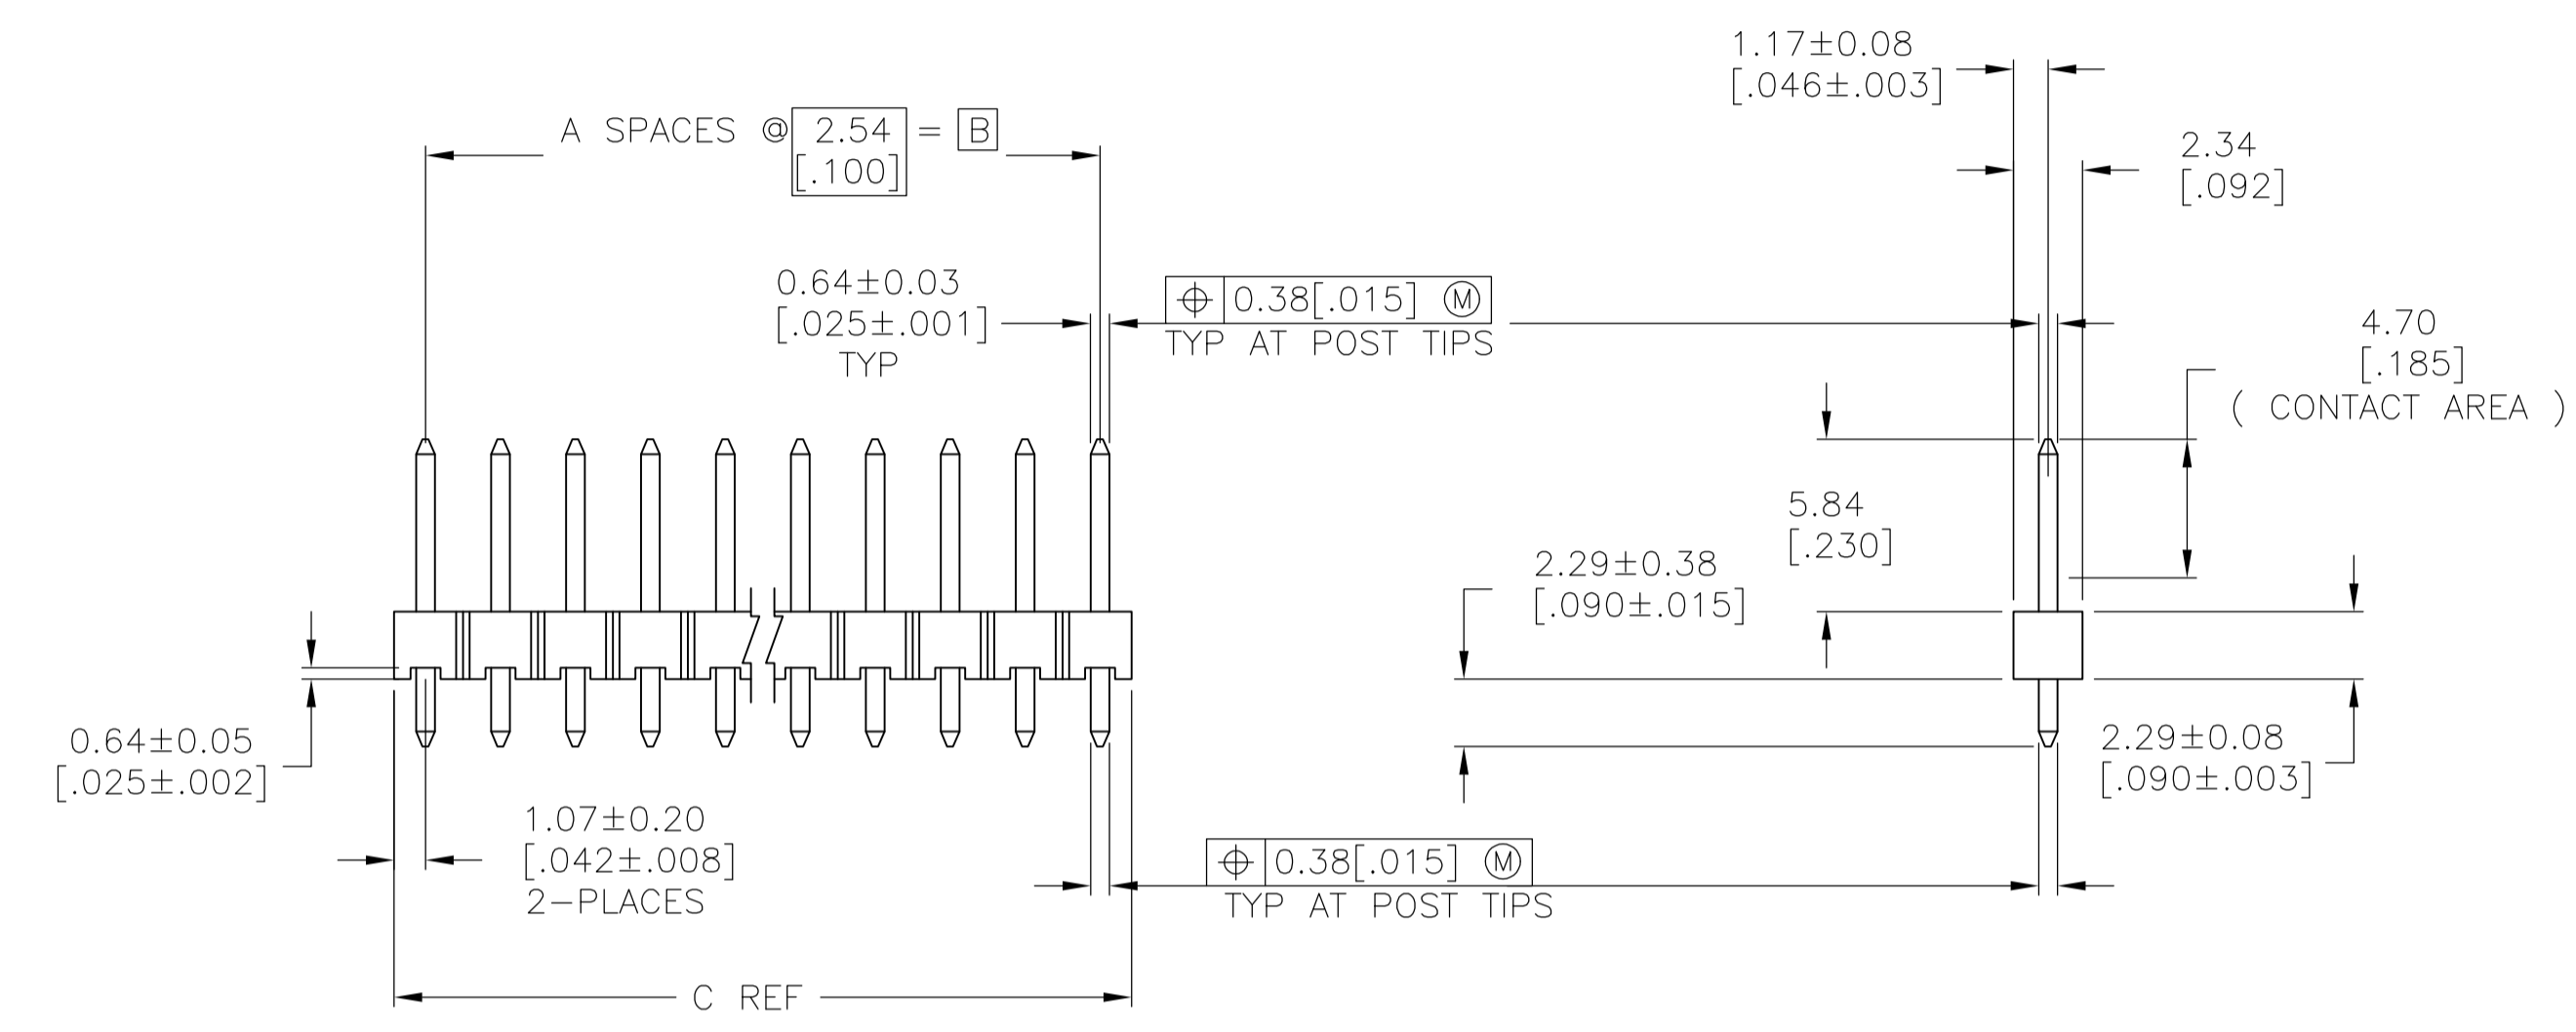

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [.160] THICK PC BOARD AND .012 [.305] STENCIL THICK.

PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
5	101.19 [3.984]	99.06 [3.900]	39	40	9-146284-0	3	101.19 [3.984]	99.06 [3.900]	39	40	4-146284-0
	98.65 [3.884]	96.52 [3.800]	38	39	6-146284-9		98.65 [3.884]	96.52 [3.800]	38	39	7-146284-9
	96.11 [3.784]	93.98 [3.700]	37	38	6-146284-8		96.11 [3.784]	93.98 [3.700]	37	38	7-146284-8
	93.57 [3.684]	91.44 [3.600]	36	37	6-146284-7		93.57 [3.684]	91.44 [3.600]	36	37	7-146284-7
	91.03 [3.584]	88.90 [3.500]	35	36	6-146284-6		91.03 [3.584]	88.90 [3.500]	35	36	7-146284-6
	88.49 [3.484]	86.36 [3.400]	34	35	6-146284-5		88.49 [3.484]	86.36 [3.400]	34	35	7-146284-5
	85.95 [3.384]	83.82 [3.300]	33	34	6-146284-4		85.95 [3.384]	83.82 [3.300]	33	34	7-146284-4
	83.41 [3.284]	81.28 [3.200]	32	33	6-146284-3		83.41 [3.284]	81.28 [3.200]	32	33	7-146284-3
	80.87 [3.184]	78.74 [3.100]	31	32	6-146284-2		80.87 [3.184]	78.74 [3.100]	31	32	7-146284-2
	78.33 [3.084]	76.20 [3.000]	30	31	6-146284-1		78.33 [3.084]	76.20 [3.000]	30	31	7-146284-1
	75.79 [2.984]	73.66 [2.900]	29	30	6-146284-0		75.79 [2.984]	73.66 [2.900]	29	30	7-146284-0
	73.25 [2.884]	71.12 [2.800]	28	29	6-146284-9		73.25 [2.884]	71.12 [2.800]	28	29	7-146284-9
	70.71 [2.784]	68.58 [2.700]	27	28	6-146284-8		70.71 [2.784]	68.58 [2.700]	27	28	7-146284-8
	68.17 [2.684]	66.04 [2.600]	26	27	6-146284-7		68.17 [2.684]	66.04 [2.600]	26	27	7-146284-7
	65.63 [2.584]	63.5 [2.500]	25	26	6-146284-6		65.63 [2.584]	63.5 [2.500]	25	26	7-146284-6
	63.09 [2.484]	60.96 [2.400]	24	25	6-146284-5		63.09 [2.484]	60.96 [2.400]	24	25	7-146284-5
	60.55 [2.384]	58.42 [2.300]	23	24	6-146284-4		60.55 [2.384]	58.42 [2.300]	23	24	7-146284-4
	58.01 [2.284]	55.88 [2.200]	22	23	6-146284-3		58.01 [2.284]	55.88 [2.200]	22	23	7-146284-3
	55.47 [2.184]	53.34 [2.100]	21	22	6-146284-2		55.47 [2.184]	53.34 [2.100]	21	22	7-146284-2
	52.93 [2.084]	50.80 [2.000]	20	21	6-146284-1		52.93 [2.084]	50.80 [2.000]	20	21	7-146284-1
	50.39 [1.984]	48.26 [1.900]	19	20	6-146284-0		50.39 [1.984]	48.26 [1.900]	19	20	7-146284-0
	47.85 [1.884]	45.72 [1.800]	18	19	6-146284-9		47.85 [1.884]	45.72 [1.800]	18	19	7-146284-9
	45.31 [1.784]	43.18 [1.700]	17	18	6-146284-8		45.31 [1.784]	43.18 [1.700]	17	18	7-146284-8
	42.77 [1.684]	40.64 [1.600]	16	17	6-146284-7		42.77 [1.684]	40.64 [1.600]	16	17	7-146284-7
	40.23 [1.584]	38.10 [1.500]	15	16	6-146284-6		40.23 [1.584]	38.10 [1.500]	15	16	7-146284-6
	37.69 [1.484]	35.56 [1.400]	14	15	6-146284-5		37.69 [1.484]	35.56 [1.400]	14	15	7-146284-5
	35.15 [1.384]	33.02 [1.300]	13	14	6-146284-4		35.15 [1.384]	33.02 [1.300]	13	14	7-146284-4
	32.61 [1.284]	30.48 [1.200]	12	13	6-146284-3		32.61 [1.284]	30.48 [1.200]	12	13	7-146284-3
	30.07 [1.184]	27.94 [1.100]	11	12	6-146284-2		30.07 [1.184]	27.94 [1.100]	11	12	7-146284-2
	27.53 [1.084]	25.40 [1.000]	10	11	6-146284-1		27.53 [1.084]	25.40 [1.000]	10	11	7-146284-1
	24.99 [.984]	22.86 [.900]	9	10	6-146284-0		24.99 [.984]	22.86 [.900]	9	10	7-146284-0
	22.45 [.884]	20.32 [.800]	8	9	6-146284-9		22.45 [.884]	20.32 [.800]	8	9	7-146284-9
	19.91 [.784]	17.78 [.700]	7	8	6-146284-8		19.91 [.784]	17.78 [.700]	7	8	7-146284-8
	17.37 [.684]	15.24 [.600]	6	7	6-146284-7		17.37 [.684]	15.24 [.600]	6	7	7-146284-7
	14.83 [.584]	12.70 [.500]	5	6	6-146284-6		14.83 [.584]	12.70 [.500]	5	6	7-146284-6
	12.29 [.484]	10.16 [.400]	4	5	6-146284-5		12.29 [.484]	10.16 [.400]	4	5	7-146284-5
	9.75 [.384]	7.62 [.300]	3	4	5-146284-4		9.75 [.384]	7.62 [.300]	3	4	7-146284-4
	7.21 [.284]	5.08 [.200]	2	3	5-146284-3		7.21 [.284]	5.08 [.200]	2	3	146284-3
	4.67 [.184]	2.54 [.100]	1	2	5-146284-2		4.67 [.184]	2.54 [.100]	1	2	146284-2
5	2.13 [.084]	-	0	1	6-146284-1	3	2.13 [.084]	-	0	1	7-146284-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN	T. HOFFMAN	12-6-95
CHK	G. DUBNICZKI	29-6-95
APVD	G. DUBNICZKI	29-6-95

STE TE Connectivity

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm [INCHES]	
0 PLC	± .15
1 PLC	± .10
2 PLC	± 0.51(.02)
3 PLC	± 0.12(.005)
4 PLC	± 0.012(.0005)
ANGLES	± .1

MATERIAL: 4 FINISH: SEE TABLE

SIZE	CAGE CODE	DRAWING NO.	RESTRICTED TO
A1	00779	146284	

CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV G