


# Rugged Chassis For DIY Electronic Projects, Features “BNC Input/Output”

## 2.6" BNC Housing

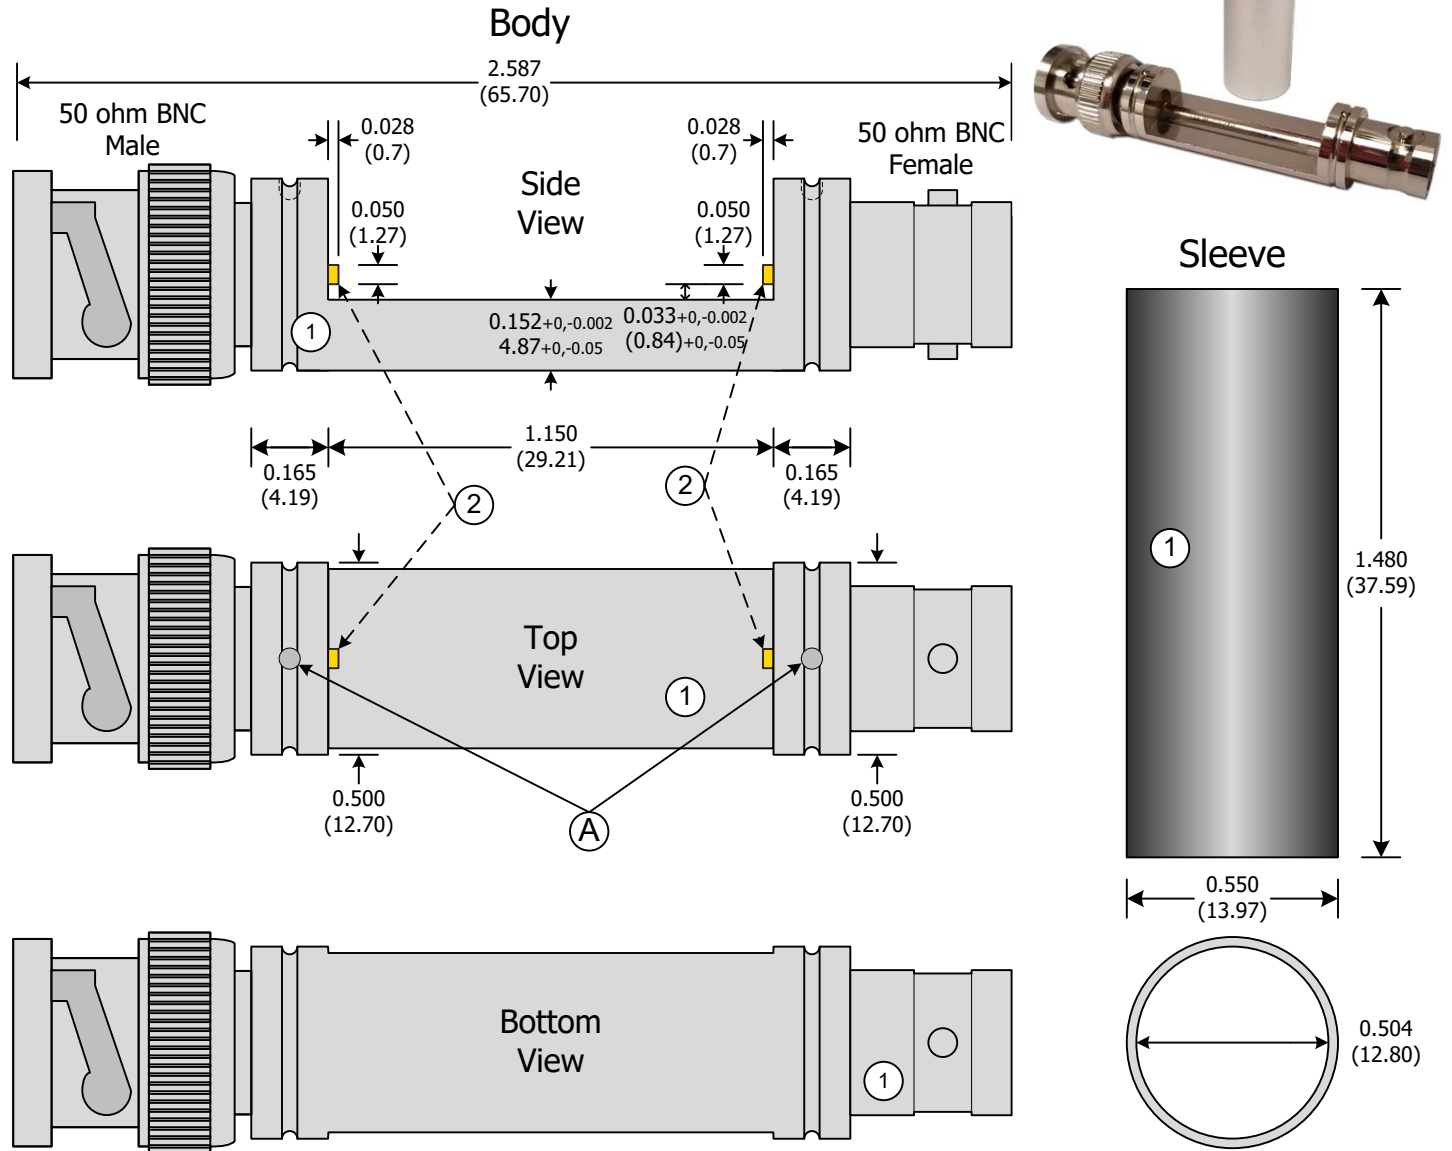

Tolerances Unless Otherwise Noted	
0-0.197 (0-0.5)	$\pm 0.004$ ( $\pm 0.10$ )
0.197-0.315 (0.5-8.0)	$\pm 0.008$ ( $\pm 0.20$ )
0.315-1.181 (8.0-30.0)	$\pm 0.016$ ( $\pm 0.40$ )
1.181-4.724 (30.0-120.0)	$\pm 0.020$ ( $\pm 0.50$ )

(A) Tooling Dimple, 2 Locations, Diameter 0.055 in (1.40 mm), Depth 0.055 in (1.40 mm)  
Provides a cavity for dimpling the sleeve with a center punch. The mechanical contact also provides an electrical contact and shields the internal circuitry in the body.

No.	Description	Qty	Material	Plating
1	Body	1	Brass	Nickel
2	Center Pin	2	Brass	Gold

BNC-KIT-2.6MF Rev. C