

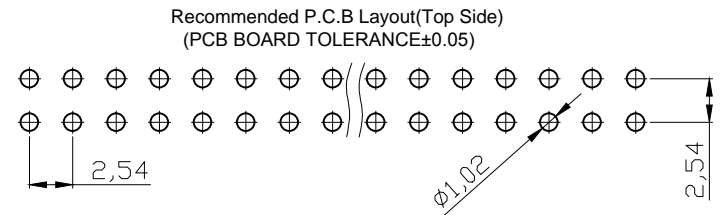
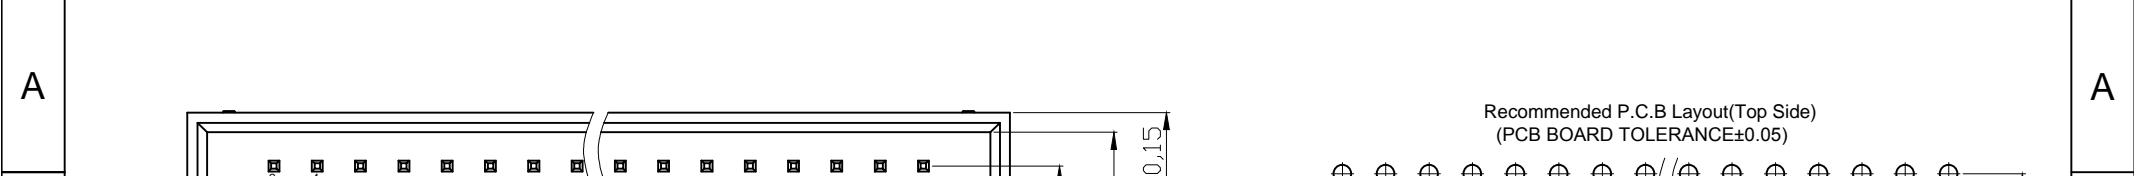


1 2 3 4 5 6 7



- NOTES:**
- MATERIAL**
1. Insulator Material: PBT+30%GF(UL94V-0), Grey
 2. Contact Material : Brass
 3. Contact Plating :
 AWHW xxG-0202-T: Gold flash/Tin Over Ni
 AWHW xxG-0102-T: 30u"Au /Tin Over Ni
- ELECTRICAL**
1. Current Rating: 3AMP\
 2. Voltage Rating: 250V
 3. Withstand Voltage: 500V AC/Minute
 4. Contact Resistance : 20mΩ max
 5. Insulation Resistance: 1000MΩ min
- ENVIRONMENTAL**
1. Operation Temperature: -40°C to +105°C
 2. Packing: Tray packing

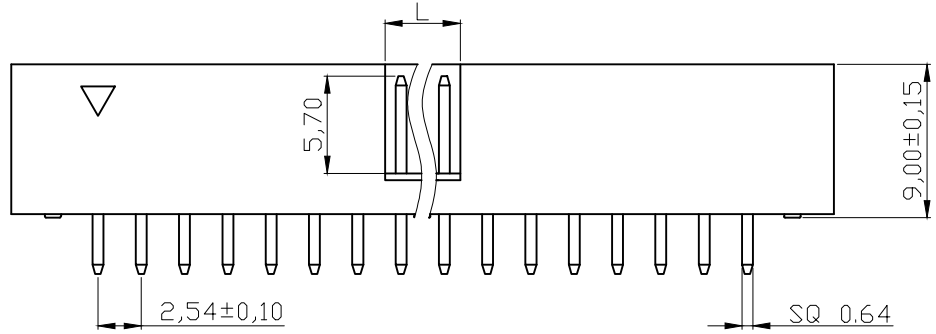

Order information:
 xx : 06,08,10,12,14,16,18,20,24
 26,30,34,40,50,60,64


Dimension antitheses list	
NO. Pin	L
6P-8P	4.00
10P-64P	4.40

RoHS compliant
 Unit: mm



Scale	Free						Date	Name	Customer-No.
TOLERANCE		⑤	Add voltage rating	09.07.2019	Xavier	Drawn	25.01.2006	Alex	ASSMANN WSW-No. AWHW xxG-0202-T AWHW xxG-0102-T
X.X	±0.40	④	Add UL file no.	12.12.2013	Amy	Approved	12.12.2013	Amy	
X.XX	±0.25	③	Add the plating Au 30u"	23.10.2013	Winnie				
X.XXX	±0.15	②	Update	29.06.2009	Dean				Drawing-No.
DIM	TOL	①	Drawn	25.01.2006	Alex				ASS 2314 CO
Angle	±3°								rev05
		Id.	Modification	Date	Name			Replace	Sheet 1/2

1 2 3 4 5 6 7

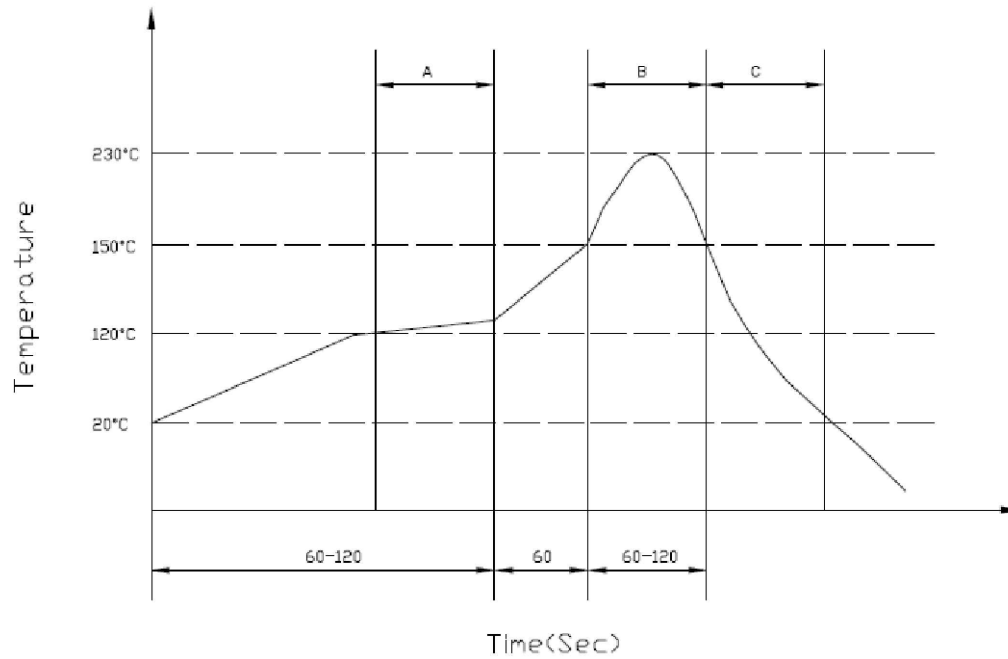

A:Preheating B:Soldering C:Gradual Cooling
 Tip Temperature Time:3-5Sec

RoHS compliant
 Unit: mm



Scale	Free					Date	Name	
TOLERANCE		⑤	Add voltage rating	09.07.2019	Xavier	Drawn	25.01.2006	Alex
X.X	±0.40	④	Add UL file no.	12.12.2013	Amy	Approved	12.12.2013	Amy
X.XX	±0.25	③	Add the plating Au 30u"	23.10.2013	Winnie			
X.XXX	±0.15	②	Update	29.06.2009	Dean			
DIM	TOL	①	Drawn	25.01.2006	Alex			
Angle	±3°							
		Id.	Modification	Date	Name			

Solder Profile for PBT

ASSMANN WSW-No. AWHW xxG-0202-T
 AWHW xxG-0102-T

Drawing-No. **ASS 2314 CO** rev05

Replace Sheet 2/2