


## SPECIFICATION CONTROL DRAWING

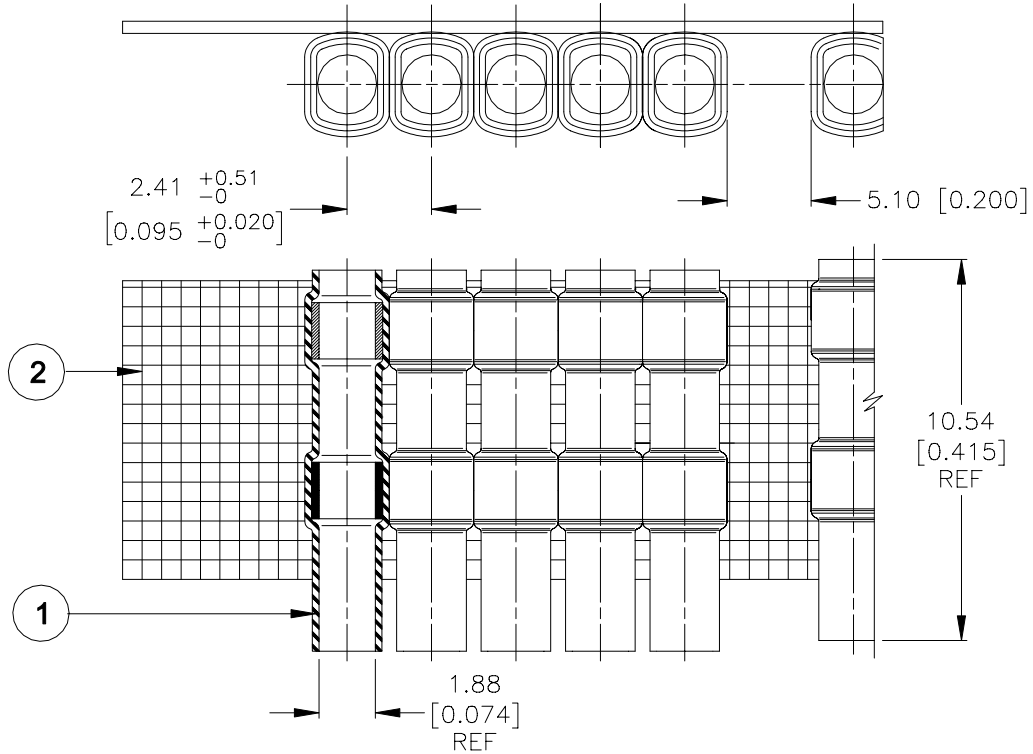

### MATERIALS

1. SOLDER-SLEEVE WIRE TERMINATOR: D-128-0031, Quantity Per Assembly: 1000
2. CARRIER STRIP: Adhesive Coated High Temperature Tape

### APPLICATION

1. This assembly is designed to be used on Tyco Electronics/Raychem 28 1000 01 connector assembly with contacts on 2.54 (0.100) center spacing. For usage parameters, see Tyco Electronics/Raychem Devices Specification Control Drawing D-128-0031.
2. Wire terminators are to be inspected to Raychem Devices Specification Control Drawing D-128-0031.
3. Terminators shall be placed on tape in groups of 5. The gap between groups shall be approximately 5.10 [0.200].

<b>tyco</b> <i>Electronics</i>		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		<b>Raychem</b>		TITLE: <b>2.54 [0.100] CENTER SPACING SOLDERPAK ASSEMBLY, SLEEVE: D-128-0031</b>					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: <b>D-704-0046</b>					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOC. ISSUE: <b>1</b>		DATE: <b>14-Jul-03</b>			
DRAWN BY: <b>M. FORONDA</b>		CAGE CODE: <b>06090</b>		REPLACES: <b>N/A</b>		DCR NUMBER: <b>D030391</b>		PROD. REV.: <b>C</b>	SCALE: <b>None</b>	SIZE: <b>A</b>	SHEET: <b>1 of 1</b>

If this document is printed it becomes uncontrolled. Check for the latest revision.