


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

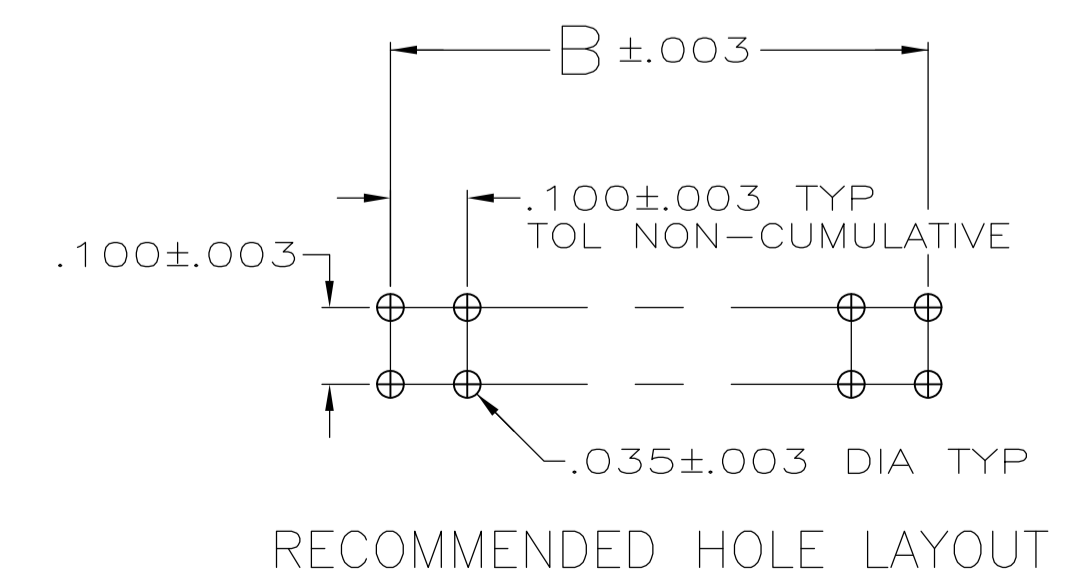

| | | | | | | | |
|---|---|--------------------------|-------|-------|----|------------|------------|
| △ | △ | 1.684 | 1.600 | 16 | 34 | 4-103322-7 | |
| △ | △ | 1.184 | 1.100 | 11 | 24 | 4-103322-6 | |
| △ | △ | .584 | .500 | 5 | 12 | 4-103322-5 | |
| △ | △ | .284 | .200 | 2 | 6 | 4-103322-4 | |
| △ | △ | .084 | — | — | 2 | 4-103322-3 | |
| △ | △ | 3.984 | 3.900 | 39 | 80 | 4-103322-2 | |
| △ | △ | .484 | .400 | 4 | 10 | 4-103322-1 | |
| △ | △ | 3.984 | 3.900 | 39 | 80 | 4-103322-0 | |
| △ | △ | 3.884 | 3.800 | 38 | 78 | 3-103322-9 | |
| △ | △ | 3.784 | 3.700 | 37 | 76 | 3-103322-8 | |
| △ | △ | 3.684 | 3.600 | 36 | 74 | 3-103322-7 | |
| △ | △ | SUPERSEDED BY 8-146250-6 | 3.584 | 3.500 | 35 | 72 | 3-103322-6 |
| △ | △ | OBSOLETE | 3.484 | 3.400 | 34 | 70 | 3-103322-5 |
| △ | △ | OBSOLETE | 3.384 | 3.300 | 33 | 68 | 3-103322-4 |
| △ | △ | OBSOLETE | 3.284 | 3.200 | 32 | 66 | 3-103322-3 |
| △ | △ | OBSOLETE | 3.184 | 3.100 | 31 | 64 | 3-103322-2 |
| △ | △ | OBSOLETE | 3.084 | 3.000 | 30 | 62 | 3-103322-1 |
| △ | △ | OBSOLETE | 2.984 | 2.900 | 29 | 60 | 3-103322-0 |
| △ | △ | OBSOLETE | 2.884 | 2.800 | 28 | 58 | 2-103322-9 |
| △ | △ | OBSOLETE | 2.784 | 2.700 | 27 | 56 | 2-103322-8 |
| △ | △ | OBSOLETE | 2.684 | 2.600 | 26 | 54 | 2-103322-7 |
| △ | △ | OBSOLETE | 2.584 | 2.500 | 25 | 52 | 2-103322-6 |
| △ | △ | OBSOLETE | 2.484 | 2.400 | 24 | 50 | 2-103322-5 |
| △ | △ | OBSOLETE | 2.384 | 2.300 | 23 | 48 | 2-103322-4 |
| △ | △ | OBSOLETE | 2.284 | 2.200 | 22 | 46 | 2-103322-3 |
| △ | △ | OBSOLETE | 2.184 | 2.100 | 21 | 44 | 2-103322-2 |
| △ | △ | OBSOLETE | 2.084 | 2.000 | 20 | 42 | 2-103322-1 |
| △ | △ | SUPERSEDED BY 7-146250-0 | 1.984 | 1.900 | 19 | 40 | 2-103322-0 |
| △ | △ | OBSOLETE | 1.884 | 1.800 | 18 | 38 | 1-103322-9 |
| △ | △ | OBSOLETE | 1.784 | 1.700 | 17 | 36 | 1-103322-8 |
| △ | △ | OBSOLETE | 1.684 | 1.600 | 16 | 34 | 1-103322-7 |
| △ | △ | OBSOLETE | 1.584 | 1.500 | 15 | 32 | 1-103322-6 |
| △ | △ | OBSOLETE | 1.484 | 1.400 | 14 | 30 | 1-103322-5 |
| △ | △ | OBSOLETE | 1.384 | 1.300 | 13 | 28 | 1-103322-4 |
| △ | △ | OBSOLETE | 1.284 | 1.200 | 12 | 26 | 1-103322-3 |
| △ | △ | OBSOLETE | 1.184 | 1.100 | 11 | 24 | 1-103322-2 |
| △ | △ | OBSOLETE | 1.084 | 1.000 | 10 | 22 | 1-103322-1 |
| △ | △ | SUPERSEDED BY 6-146250-0 | .984 | .900 | 9 | 20 | 1-103322-0 |
| △ | △ | OBSOLETE | .884 | .800 | 8 | 18 | 103322-9 |
| △ | △ | OBSOLETE | .784 | .700 | 7 | 16 | 103322-8 |
| △ | △ | OBSOLETE | .684 | .600 | 6 | 14 | 103322-7 |
| △ | △ | OBSOLETE | .584 | .500 | 5 | 12 | 103322-6 |
| △ | △ | OBSOLETE | .484 | .400 | 4 | 10 | 103322-5 |
| △ | △ | OBSOLETE | .384 | .300 | 3 | 8 | 103322-4 |
| △ | △ | OBSOLETE | .284 | .200 | 2 | 6 | 103322-3 |
| △ | △ | OBSOLETE | .184 | .100 | 1 | 4 | 103322-2 |
| △ | △ | SUPERSEDED BY 5-146250-1 | .084 | — | — | 2 | 103322-1 |

| | | | | | |
|--|---|---|---|------------|-------------|
| PLATING | C | B | A | NO OF POSN | PART NUMBER |
| THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± - MATERIAL: POST: COPPER ALLOY FINISH: SEE TABLE WEIGHT: — SIZE: A1 CASE CODE: 00779 DRAWING NO: 103322 RESTRICTED TO: — CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV L | | | | | |