

Datasheet

Industrial SD Card 3TE4

- SD 3.0 interface
- High performance
- Power fail Management
- LDPC ECC algorithm implement



Introduction

Innodisk 3TE4 is an industrial-grade SD card solution with an integrated industrial controller, which is designed for embedded applications. With enhanced flash technologies and a powerful configurable LDPC ECC engine, SD 3TE4 can achieve high-speed data transfer rates.

Innodisk industrial SD 3TE4 provides a wide range of capacities from 32GB to 256GB with TLC NAND Flash, and is fully compliant with SD3.0 and SD2.0 specifications.

Innodisk industrial SD 3TE4 are specifically designed for industrial PC and embedded applications for high performance. With its low power consumption and the above mentioned features, Innodisk industrial SD 3TE4 can be applied for industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile applications.

Industrial SD Card 3TE4

Contact us for more information
about the Industrial SD Card 3TE4.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan

Tel: +886-2-77033000

Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com

+1-510-770-9421

Europe

eusales@innodisk.com

+31-40-3045-400

Japan

jpsales@innodisk.com

+81-3-6667-0161

China

sales_cn@innodisk.com

+86-755-21673689


www.innodisk.com

© 2021 Innodisk Corporation.

All right reserved. Specifications
are subject to change without
prior notice.

20210211

Diagram

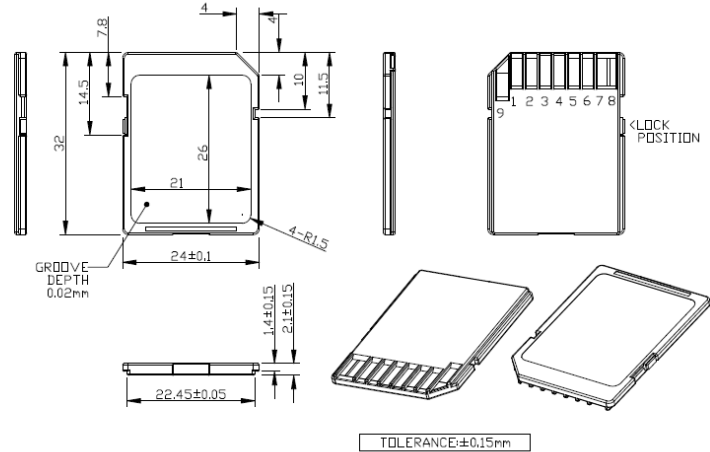

Specifications

| | |
|-------------------------------|---|
| Interface | SD 3.0 |
| Flash Type | TLC |
| Capacity | 32GB~256GB |
| Max. Channels | 1 |
| Sequential R/W (MB/sec, max.) | 90/80 |
| Max. Power Consumption | 0.47W (3.3V x 145mA) |
| Thermal Sensor | - |
| Extended DRAM buffer | - |
| H/W Write Protect | √ |
| ATA Security | - |
| S.M.A.R.T. | - |
| Dimension (WxLxH) | 24 X 32.0 X 2.1 mm |
| Environment | Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours Endurance:3,000 P/E cycles |

Ordering Information

| Operation Temp. | 32GB | 64GB | 128GB | 256GB |
|-------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Extend Grade (-25°C ~ +85°C) | DESDC- 32GS06EE1SL | DESDC- 64GS06GE1SL | DESDC- A28S06GE1SL | DESDC- B56S06GE1SL |
| Industrial Grade (-40°C ~ +85°C) | DESDC- 32GS06EW1SL | DESDC- 64GS06GW1SL | DESDC- A28S06GW1SL | DESDC- B56S06GW1SL |