
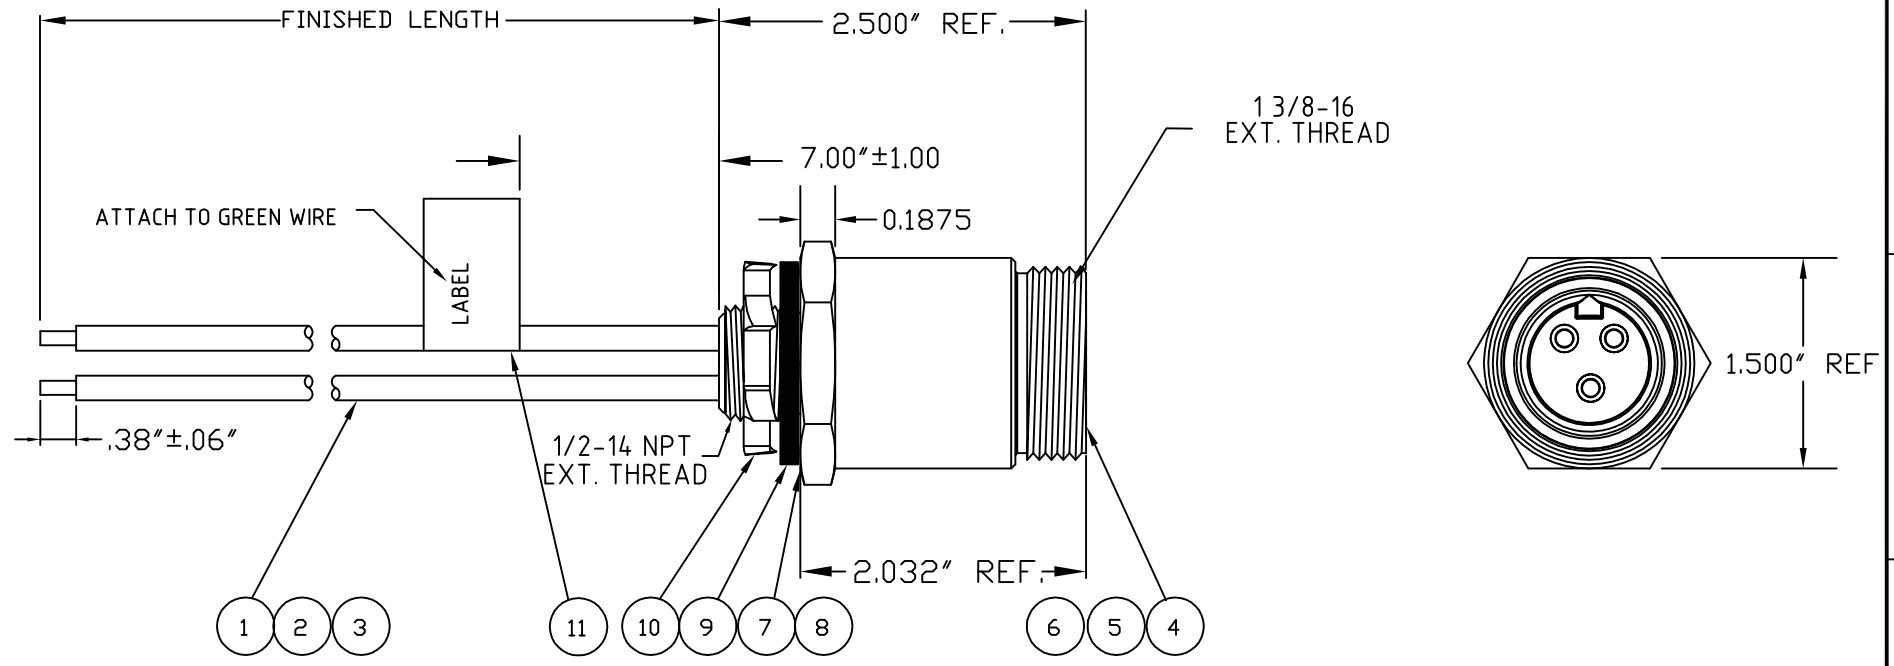


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1300660139	CR3C06A29M006	0.6 METER
1300662010	CR3C06A29M0038	0.3 METER

(B)

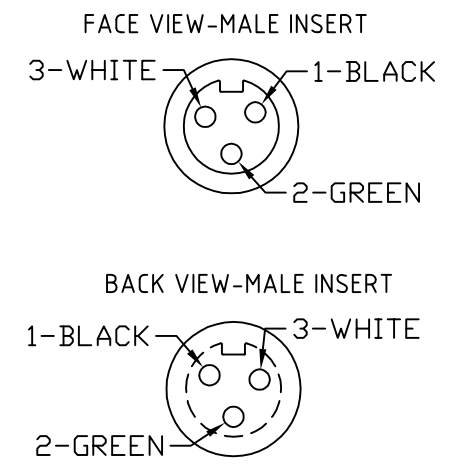

- NOTES:
1. READ CUT LENGTH OF SHOP ORDER. QUANTITY IN USED/PPH WILL INDICATE LENGTH IN FEET AND FRACTIONS OF FEET
 2. WIRE LENGTH TOLERANCES PER S-175 UNLESS OTHERWISE SPECIFIED
 3. CRIMP MINIMUM PULLOUT FORCE PER S-186
 4. FASTEN INSERT AND CONDUCTORS TO SHELL WITH EPOXY PER STD-204
 5. MARK LABEL WITH RATINGS PER S-169
 6. ELECTRICAL TEST PER S-165
 7. PACKAGE PER S-188
 8. APPLY INSTALLATION INSTRUCTIONS PER S-192
 9. ASSEMBLY MUST BE ROHS COMPLIANT
 10. RATING 25A, 600V

11	1	FLAG LABEL	VINYL	YELLOW
10	1	3/4-14 NPT LOCKNUT	STEEL	ZINC PLATE
9	1	GASKET	NEOPRENE	BLACK
8	A/R	EPOXY HARDENER		BLACK
7	A/R	EPOXY RESIN		BLACK
6	1	RECEPTACLE SHELL	ALUMINUM ALLOY	CLEAR ANODIZED
5	1	MALE INSERT	PVC	BLACK
4	3	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	SEE TABLE	#12-1 WIRE PVC GREEN	PVC JACKET	GREEN
2	SEE TABLE	#12-1 WIRE PVC WHITE	PVC JACKET	WHITE
1	SEE TABLE	#12-1 WIRE PVC BLACK	PVC JACKET	BLACK
ITEM	QTY	DESCRIPTION	MATERIAL NUMBER	ENGINEERING NUMBER

EC NO: WNA2009-0743 DRWN: MODELL 5/12/09 CHKD: --- APPR: RDEROSS 2009/05/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		4 PLACES	mm	INCH	DRAWN BY DATE		TITLE QC MALE 12 AWG 3/4" NPT RECPT 3 POLE	
		3 PLACES	±---	±---	MODELL 2008/09/10			
		2 PLACES	±---	±---	CHECKED BY DATE			
1 PLACE	±---	±---	RDEROSS 2008/09/10					
ANGULAR ±----°				APPROVED BY DATE		MATERIAL NO. DOCUMENT NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE TABLE		MOLEX INCORPORATED		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1 OF 1		