


P	LTR	DESCRIPTION	DATE	DWN	APVD
	K1	REDRAWN PER ECO-17-007400	14DEC2017	RS	DR

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

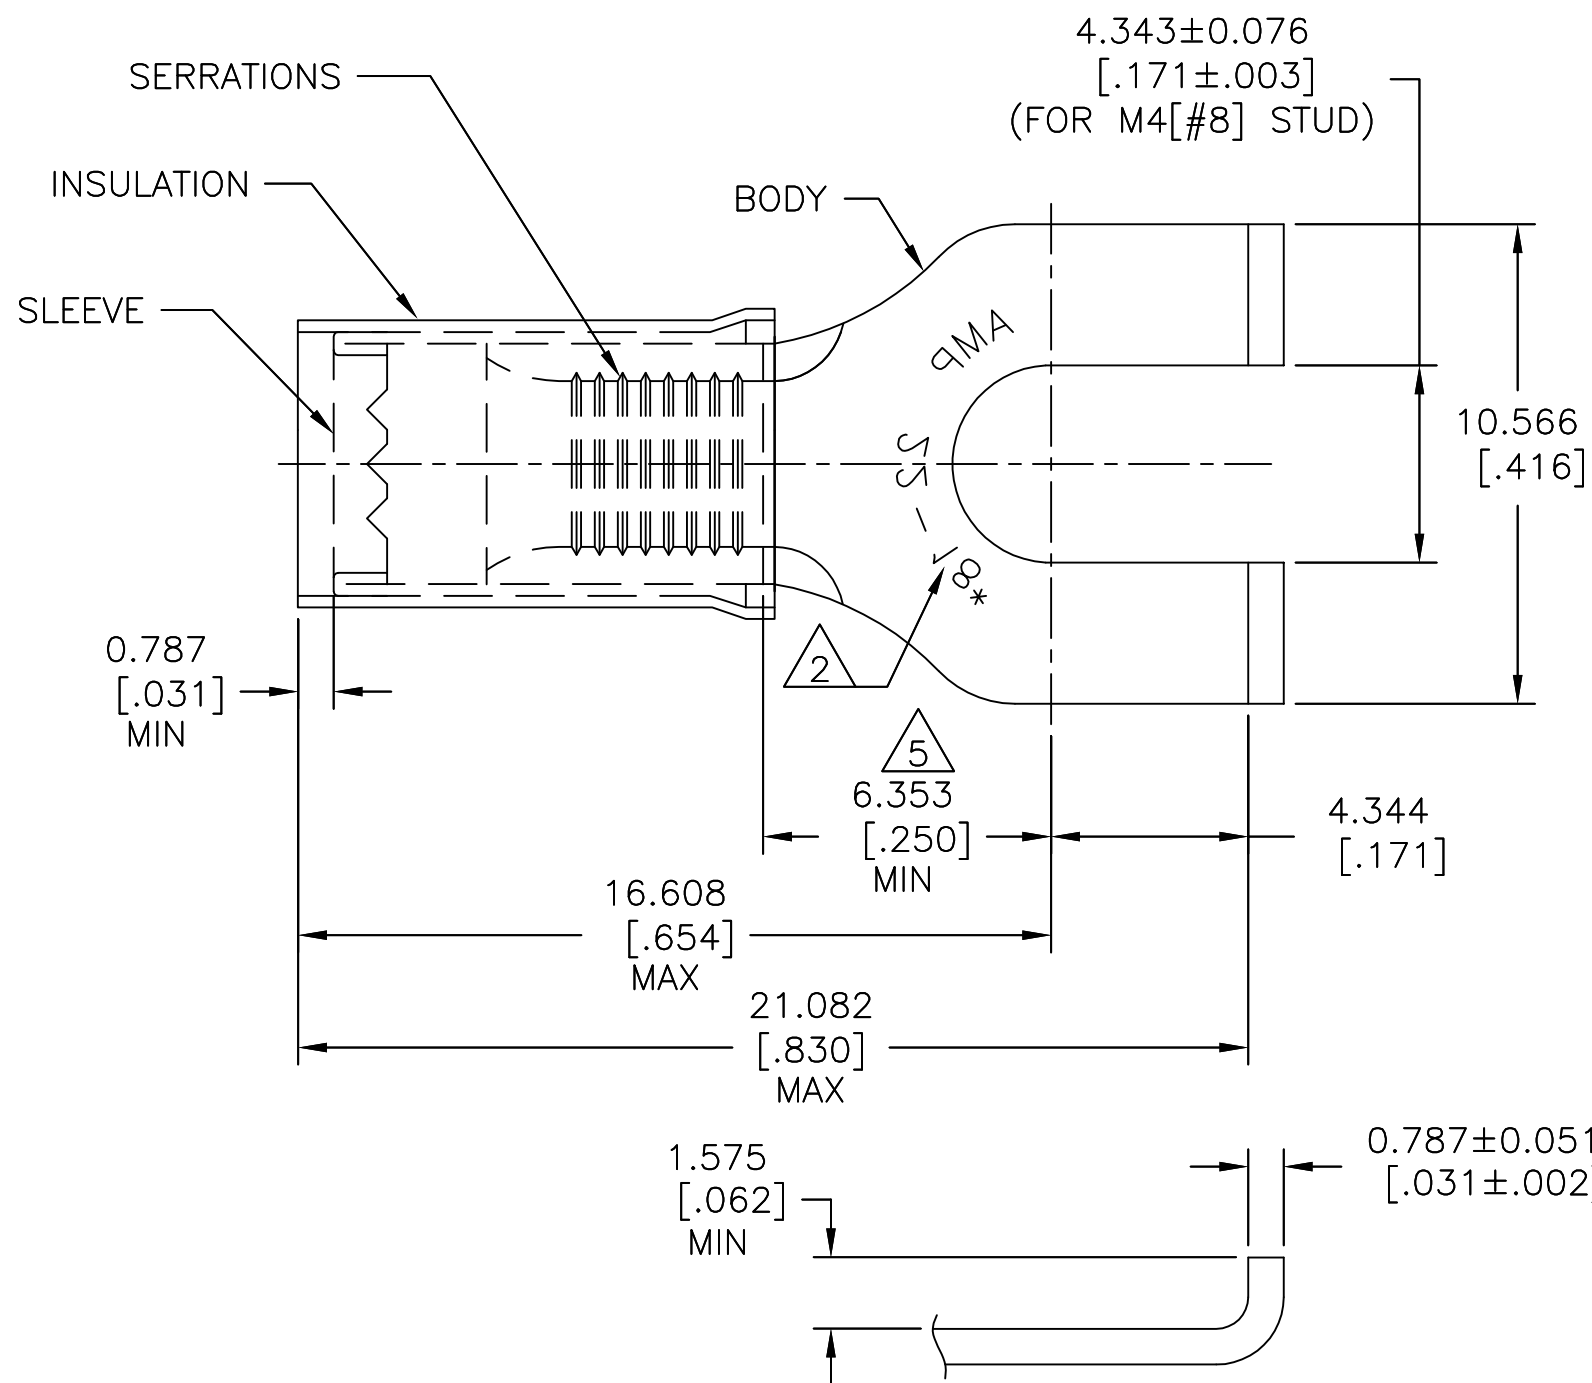

- 1 WIRE INSULATION: $\phi 2.667-3.556[\phi .105-.140]$
- 2 STAMP AMP 22-18* APPROX AS SHOWN. 22-16 TERMINALS ARE STAMPED 22-18 IN ACCORDANCE WITH MILITARY SPEC SAE AS 7928 COMMERCIAL RANGE IS 22-16.
- 3 FINISH:
BODY & SLEEVE: TIN PLATE PER ASTM B545.
INSULATION: COLOR-RED.
- 4 MATERIAL:
BODY & SLEEVE: COPPER PER ASTM B152.
INSULATION : NYLON
- 5 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

5000	ON TAPE, REEL	2-32498-1
1000	LOOSE PIECE	32498
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

MAX RECOMMENDED OPERATING TEMPERATURE:
105°C [221°F]

VOLTAGE RATING:
300 V MAX

CIRCULAR MIL AREA:
0.26-1.65mm² [509-3,260]
SOLID OR STRANDED

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION


TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]



TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ± -
- 1 PLC ± -
- 2 PLC ± -
- 3 PLC ± 0.127[.005]
- 4 PLC ± -
- ANGLES ± 5°
- FINISH

MATERIAL



DWN RAVI S 14DEC2017

CHK ROHDE DANIEL F 14DEC2017

APVD ROHDE DANIEL F 14DEC2017

PRODUCT SPEC

UL 486 A-B

APPLICATION SPEC

114-2157

WEIGHT -

CUSTOMER DRAWING

NAME

WIRE TERMINAL,
P.I.D.G, FLANGED SPADE,
WIRE SIZE: 22-16 AWG

SIZE

A3 00779

CAGE CODE

DRAWING NO

C=32498

RESTRICTED TO

SCALE 1:1

SHEET 1 OF 1

REV K1

