

6

5


4

3

2

1


MALE INSERT FRONT VIEW



- 1 BROWN
- 2 WHITE
- 3 BLUE
- 4 BLACK



.57 REF. [14.48]

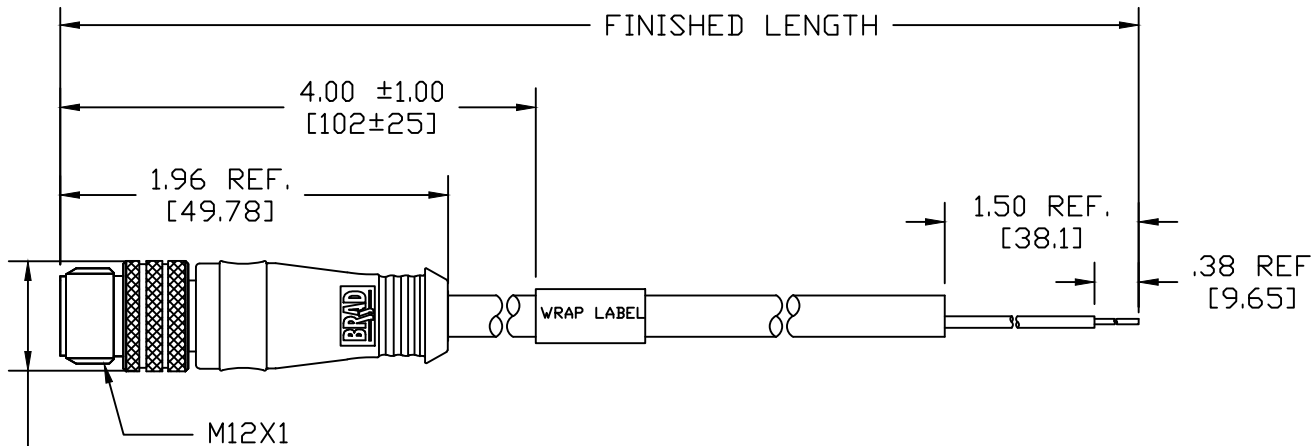

804006J50M020

Wire type
22/4C AWG light
Gray PVC

cable length
M020-----2 Meter
M100-----10 Meter

MECHANICAL
 CONTACT : GOLD/NICKEL OVER COPPER ALLOY
 INSERT : BLACK PUR
 COUPLING NUT: TEFLON COAT OVER NICKEL PLATED BRASS
 MOLDED BODY: GRAY PVC
 CABLE: 22 AWG 4 CONDUCTORS LIGHT GRAY PVC JACKET
 CABLE MARKING: RJ AWM STYLE 2937 VW-1 80C 300V E65859
 SWCC SHOWA CSA AWM II A 80C 300V FT1 LL40873
 22AWGX4C 1-BROWN 2-WHITE 3-BLUE 4-BLACK LF
 WRAP LABEL: MYLAR WHITE WITH BLACK LETTERS

ELECTRICAL
 VOLTAGE RATING: 250V AC/DC
 AMPERAGE: 4A

ENVIRONMENTAL
 PROTECTION: IP67 PER IEC 60529
 IP68 PER SPEC PS-120001-001
 OPERATION TEMP: 0°C~80°C

RELEASE EC NO: WEU2012-0002 DRWN: TWOLDEGE 2011/07/18 CHKD: VOU APPR: JFMURPHY 2012/04/17 REV	DESCRIPTION 1 2 3 4	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			4 PLACES	mm ±---	INCH ±---	DRAWN BY TWOLDEGE	DATE 2011/07/18	TITLE MICRO CHANGE ASSEMBLY 4-POLE MALE STRAIGHT 22/4 AWG LIGHT GRAY PVC			
			3 PLACES	mm ±---	INCH ±.005	CHECKED BY VOU	DATE ---	MOLEX INCORPORATED			
			2 PLACES	mm ±0.13	INCH ±0.010	APPROVED BY JFMURPHY	DATE 2012/04/17	DOCUMENT NO. SD-120001-003 SHEET NO. 1 OF 1			
1 PLACE		mm ±.25	INCH ±0.020	MATERIAL NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			ANGULAR ±---°								

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A