

SUMMARY



Image is for illustrative purpose only

Wires

Low voltage 10

Series SP
Termination type Female print 90° PCB
IP rating 50
AWG wire size 30.00 - 22.00
Cable Ø 0.00 - 0.00 mm
Status active

Download

[Request a quote](#)
[PCB Eagle Pattern](#)
[PCB Altium Pattern](#)
[PCB KiCad Pattern](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model SK_.SP*: Fixed socket, key (N) or keys (P, S and T), with two nuts (back panel mounting), yellow front nut and elbow print contacts
Keying 3 keys (alpha=0, gamma=60, plug: male contacts, receptacle: female contacts)
Housing Material Proprietary sulfone, gray
Variant J : Yellow front nut
Weight 6.60 g

Performance


Configuration SP.M10 : 10 Low V.
Insulator L: PEEK (UL 94 / V-0/1.5)
Rated Current 4.2 Amps

Others

Endurance (Shell): >2000 mating cycles
Temp (min / max): -50°C / +170°C

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

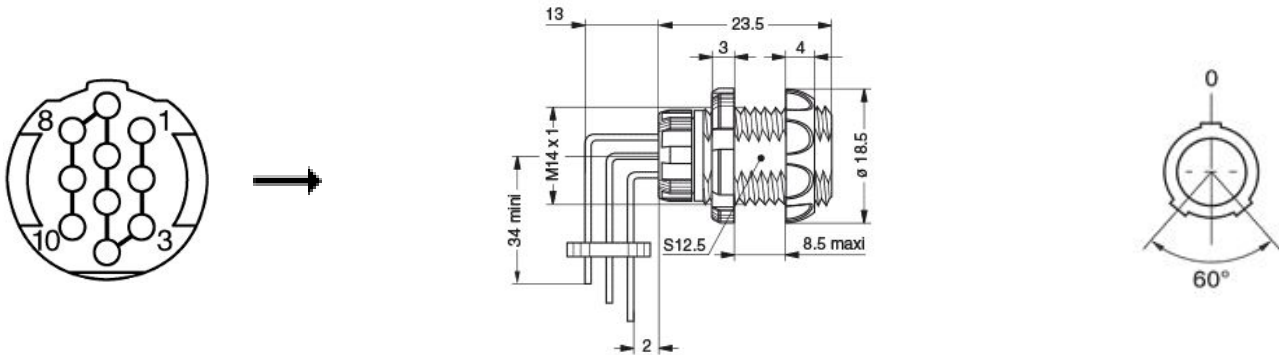

Dimensions

	A	E _{max}	L	N	e
mm.	18.5	8.5	36.5	23.5	M14x1
in.	0,73	0,33	1,44	0,93	

RECOMMENDED BY LEMO

Tools

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.