

2019



wiha

Tools that work for you

PROFESSIONAL TORQUE CONTROL







COMPLETE TORQUE CONTROL PROGRAM




TorqueFix • TorqueVario • TorqueControl Blades • TorqueFix Wing EasyTorque • iTorque • Adapters • Cable Keys • Insulated TorqueVario ESD Safe TorqueVario • T-handle Torque • TorqueControl Sets • Micro Bits







Wiha TorqueFix Wing Handles & Blades

| | DESCRIPTION | Page |
|---|-------------------|------|
|  | TorqueFix Handle | 4 |
|  | Hex Metric Blades | 4 |
|  | TORX Blades | 4 |
|  | TORXPlus Blades | 4 |



Wiha TPMS Install / Repair Kit

| | DESCRIPTION | Page |
|---|-------------|------|
|  | TPMS Set | 4 |

Wiha TorqueControl Tools

| | DESCRIPTION | Page |
|---|---|-------|
|  | TorqueFix Handle | 5 |
|  | TorqueVario Handle | 5 |
|  | TorqueVario Handle (Newton Meter Scale) | 5 |
|  | Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex | 6 |
|  | MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters | 9 |
|  | TorqueControl Sets | 10-11 |



Wiha TorqueControl Blades & Bits

| | DESCRIPTION | Page |
|---|---|------|
|  | Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex | 6 |
|  | MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters | 9 |



Wiha EasyTorque Handles

| | DESCRIPTION | Page |
|--|---------------------|------|
|  | EasyTorque Handles | 7 |
|  | EasyTorque TORX | 7 |
|  | EasyTorque TORXPlus | 7 |





Wiha iTorque Handles & Sets

| | DESCRIPTION | Page |
|--|-----------------|------|
|  | iTorque Handles | 8 |
|  | iTorque Sets | 8 |

Wiha TorqueControl Accessories

| | DESCRIPTION | Page |
|--|------------------------|------|
|  | TorqueControl Adapters | 6-7 |
|  | Torque Cable Key | 7 |

Wiha Torque SlimLine Insulated Tools

| | DESCRIPTION | Page |
|--|--|------|
|  | TorqueVario Handle | 12 |
|  | Insulated Blade Holder | 13 |
|  | Insulated SlimLine Blades Slotted, Phillips, Terminal, TORX, Square | 13 |
|  | Ins. Torque SlimLine Sets | 12 |

Wiha TorqueFix Wing Keys Handles & Blades

- Audible Click At Torque
- Replaceable Blades
- +/- 6% Repeatability
- Extremely Compact
- Quick Turning Zone



Low profile
for easy access

Small &
Compact

Very slim blade diameter for
hard to reach screws

Torque tool for very tight
machine assembly spaces



EN ISO 6798,
BS EN 26789, ASME
B107.14M

+/- 6% Accuracy



Includes Calibration
Certificate

283 TorqueFix Wing Handles

Audible & perceptible click when torque setting
has been attained.

| Item No. | Nm | mm | Inch | pkg. | lbs. |
|----------|-----|----|------|------|------|
| 28349 | 0.5 | 68 | 2.7 | 1 | .28 |
| 28351 | 0.6 | 68 | 2.7 | 1 | .28 |
| 28352 | 0.9 | 68 | 2.7 | 1 | .28 |
| 28353 | 1.1 | 68 | 2.7 | 1 | .28 |
| 28354 | 1.2 | 68 | 2.7 | 1 | .28 |
| 28355 | 1.4 | 68 | 2.7 | 1 | .28 |
| 28356 | 2.0 | 68 | 2.7 | 1 | .28 |
| 28357 | 2.5 | 68 | 2.7 | 1 | .28 |
| 28358 | 3.0 | 68 | 2.7 | 1 | .28 |
| 28359 | 3.8 | 68 | 2.7 | 1 | .28 |
| 28360 | 4.0 | 68 | 2.7 | 1 | .28 |



283 TORX® Blades For TorqueFix

Wing Handles CVM steel, through-hardened,
titanium silver.

| Item No. | Size | Max Nm | Inch | pkg. | lbs. |
|----------|------|--------|------|------|------|
| 28374 | T6 | 0.6 | 3.0 | 1 | .03 |
| 28375 | T7 | 0.9 | 3.0 | 1 | .03 |
| 28376 | T8 | 1.3 | 3.0 | 1 | .03 |
| 28377 | T9 | 2.5 | 3.0 | 1 | .03 |
| 28378 | T10 | 3.8 | 3.0 | 1 | .03 |
| 28379 | T15 | 5.5 | 3.0 | 1 | .03 |
| 28380 | T20 | 8.0 | 3.0 | 1 | .03 |
| 28381 | T25 | 8.0 | 3.0 | 1 | .03 |



283 TORXPlus® Blades For TorqueFix

Wing Handles CVM steel, through-hardened,
titanium silver.


| Item No. | Size | Max Nm | Inch | pkg. | lbs. |
|----------|------|--------|------|------|------|
| 28382 | IP6 | 0.8 | 3.0 | 1 | .03 |
| 28383 | IP7 | 1.3 | 3.0 | 1 | .03 |
| 28384 | IP8 | 2.0 | 3.0 | 1 | .03 |
| 28385 | IP9 | 3.0 | 3.0 | 1 | .03 |
| 28386 | IP10 | 4.5 | 3.0 | 1 | .03 |
| 28387 | IP15 | 6.6 | 3.0 | 1 | .03 |
| 28388 | IP20 | 8.0 | 3.0 | 1 | .03 |
| 28389 | IP25 | 8.0 | 3.0 | 1 | .03 |



283 Hex Metric Blades For TorqueFix

Wing Handles CVM steel, through-hardened,
titanium silver.

| Item No. | Size | Max Nm | Inch | mm | lbs. | pkg. |
|----------|------|--------|------|----|------|------|
| 28361 | 1.5 | 0.9 | 3.0 | 75 | .03 | 1 |
| 28362 | 2.0 | 1.8 | 3.0 | 75 | .03 | 1 |
| 28363 | 2.5 | 3.8 | 3.0 | 75 | .03 | 1 |
| 28364 | 3.0 | 5.5 | 3.0 | 75 | .03 | 1 |
| 28365 | 4.0 | 8.0 | 3.0 | 75 | .03 | 1 |

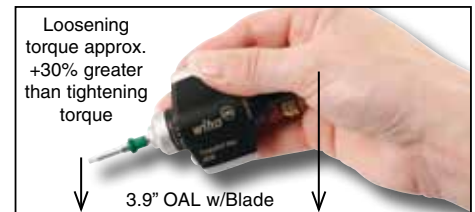

Wiha Adjustable TorqueControl Tools

Wiha TorqueControl Screwdrivers

- **TorqueFix** factory preset torque
- **TorqueVario** adjustable torque drivers

molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.


Precise repeatability!

All TorqueFix & TorqueVario tools are tested and comply with:

- **EN ISO 6789**
- **BS EN 26789**
- **ASME B107.14M**

Each tool has unique serial number and certificate of calibration

Whether it's TorqueVario-S or TorqueFix - Wiha has a torque screwdriver to cover almost every application

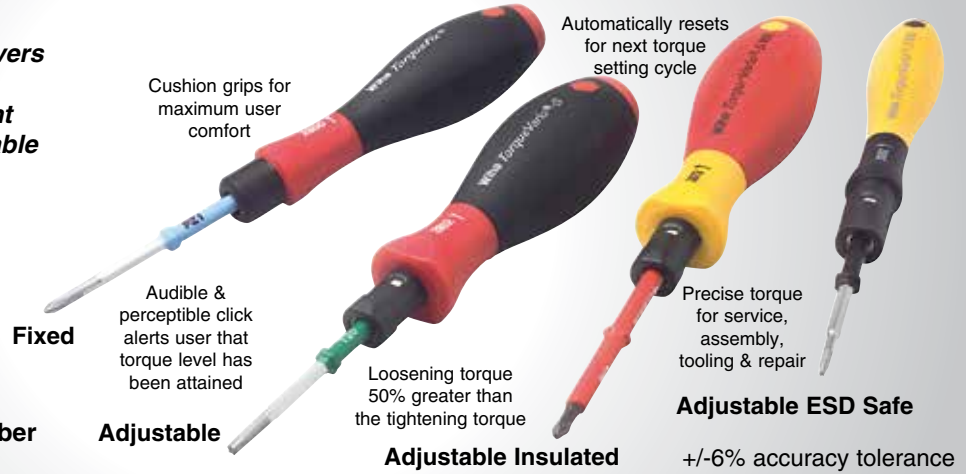

+/-6% accuracy tolerance
Certificate of calibration



285 TorqueFix, With Wiha-SoftFinish®
Handle Fixed Torque value pre-set. Tested in accordance with EN ISO 6789, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible & perceptible click when pre-set torque has been attained. Automatically resets for next torque cycle; 50% greater reverse torque.

| Item No. | Pre-Sets | | Nm | mm | Inch | lbs. | pkg. |
|----------|----------|------|------|-----|------|------|------|
| | oz. | lbs. | | | | | |
| 28503 | 80 | 5 | 0.56 | 112 | 4.4 | .16 | 1 |
| 28505 | 120 | 7.5 | 0.84 | 112 | 4.4 | .15 | 1 |
| 28507 | 160 | 10 | 1.12 | 119 | 4.7 | .28 | 1 |
| 28509 | 200 | 12.5 | 1.41 | 119 | 4.7 | .27 | 1 |
| 28511 | 240 | 15 | 1.69 | 119 | 4.7 | .27 | 1 |
| 28513 | 320 | 20 | 2.25 | 119 | 4.7 | .28 | 1 |
| 28515 | 400 | 25 | 2.82 | 126 | 4.9 | .37 | 1 |
| 28517 | 480 | 30 | 3.39 | 126 | 4.9 | .37 | 1 |
| 28518 | 560 | 35 | 3.95 | 126 | 4.9 | .37 | 1 |
| 28519 | 640 | 40 | 4.52 | 126 | 4.9 | .37 | 1 |
| 28521 | 800 | 50 | 5.65 | 132 | 5.2 | .52 | 1 |
| 28523 | 960 | 60 | 6.78 | 132 | 5.2 | .52 | 1 |
| 28525 | 1120 | 70 | 7.91 | 132 | 5.2 | .52 | 1 |

Direct Reading Scale



4mm Bit Holder

+/-6% accuracy tolerance Certificate of calibration

285 Adjustable TorqueVario With Direct Reading Scale EN ISO 6789, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

| Item No. | Range | | mm | lbs. |
|----------|----------------|------------|-----|------|
| | Inch lbs. | Increments | | |
| 28501* | 15 - 80(in/oz) | 2.5 In.oz. | 127 | .22 |
| 28502 | 5 - 10 | .5 In.lbs. | 127 | .41 |
| 28506 | 10 - 50 | 2 In.lbs. | 138 | .59 |

* 28501 +/- 10% (This unit only)*

| Item No. | Range | | mm | lbs. |
|----------|-----------|------------|-----|------|
| | Inch lbs. | Increments | | |
| 28404 | 5 - 18 | 1 In.lbs. | 131 | .50 |
| 28408 | 18 - 62 | 2 In.lbs. | 142 | .74 |

Direct Reading Scale



1/4" Bit Holder

| Item No. | Range | | mm |
|----------|----------------|------------|-----|
| | Inch lbs. | Increments | |
| 28410* | 15 - 80(in/oz) | 2.5 In.oz. | 127 |
| 28411 | 5 - 10 | .5 In.lbs. | 127 |
| 28412 | 10 - 50 | 2 In.lbs. | 138 |
| 28413 | 5 - 18 | .5 In.lbs. | 131 |
| 28414 | 18 - 62 | 2 In.lbs. | 142 |

+/-6% accuracy tolerance Certificate of calibration

* 28501 +/- 10% (This unit only)



+/-6% accuracy tolerance
Certificate of calibration

285 Adjustable TorqueVario-S Handle - In Newton Meter Scale EN ISO 6789, BS EN 26789, ASME B107.14M. Ergo molded multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

| Item No. | Newton Meter Scale | | mm | lbs. |
|----------|--------------------|------------|-----|------|
| | Range | Increments | | |
| 28550* | 0.1 - 0.6Nm | .05 Nm | 127 | .35 |
| 28551 | 0.4 - 1.0Nm | .05 Nm | 127 | .35 |
| 28552 | 0.5 - 2.0Nm | .10 Nm | 131 | .45 |
| 28553 | 0.8 - 5.0Nm | .20 Nm | 138 | .55 |
| 28655 | 2.0 - 7.0Nm | .25 Nm | 142 | .70 |

* +/- 10% (This unit only)


+/-6% accuracy tolerance
Certificate of calibration



1/4" Bit Holder

| Item No. | Range | | mm |
|----------|-------------|------------|-----|
| | Inch lbs. | Increments | |
| 28415* | 0.1 - 0.6Nm | .05 Nm | 127 |
| 28416 | 0.4 - 1.0Nm | .05 Nm | 127 |
| 28417 | 0.5 - 2.0Nm | .10 Nm | 131 |
| 28418 | 0.8 - 5.0Nm | .20 Nm | 138 |
| 28419 | 2.0 - 7.0Nm | .25 Nm | 142 |

* +/- 10% (This unit only)

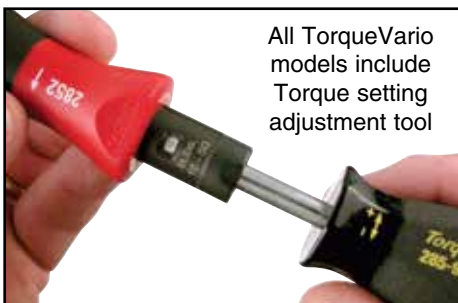

All TorqueVario models include Torque setting adjustment tool

Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles



285 Slotted Interchangeable Blades For TorqueFix & TorqueVario Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|-----|------|-----|------|------|------|
| No. | mm | Inch | mm | lbs. | Nm | pkg. |
| 28534 | 1.5 | .059 | 175 | .07 | 0.15 | 1 |
| 28535 | 2.0 | .078 | 175 | .07 | 0.4 | 1 |
| 28536 | 2.5 | .098 | 175 | .07 | 0.4 | 1 |
| 28537 | 3.0 | .118 | 175 | .07 | 0.6 | 1 |
| 28538 | 3.5 | .139 | 175 | .07 | 1.1 | 1 |
| 28539 | 4.0 | .157 | 175 | .07 | 2.5 | 1 |



285 Phillips Interchangeable Blades For TorqueFix & TorqueVario Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|------|-----|-----|------|-----|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28540 | 000 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28541 | 00 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28542 | 0 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28543 | 1 | 175 | 4.0 | .07 | 3.8 | 1 |
| 28544 | 2 | 175 | 4.0 | .07 | 5.5 | 1 |



285 TORX® Interchangeable Blades For TorqueFix & TorqueVario TORX® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|------|-----|-----|------|-----|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28561 | T5 | 175 | 4.0 | .07 | 0.4 | 1 |
| 28562 | T6 | 175 | 4.0 | .07 | 0.6 | 1 |
| 28563 | T7 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28564 | T8 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28565 | T9 | 175 | 4.0 | .07 | 2.5 | 1 |
| 28566 | T10 | 175 | 4.0 | .07 | 3.8 | 1 |
| 28567 | T15 | 175 | 4.0 | .07 | 5.5 | 1 |
| 28568 | T20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28569 | T25 | 175 | 4.0 | .07 | 8.0 | 1 |



285 Hex Inch Interchangeable Blades For TorqueFix & TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | |
|-------|------|-----|------|------|------|
| No. | Inch | mm | lbs. | Nm | pkg. |
| 28555 | .050 | 175 | .07 | .4 | 1 |
| 28556 | 1/16 | 175 | .07 | .9 | 1 |
| 28557 | 5/64 | 175 | .07 | 1.8 | 1 |
| 28558 | 3/32 | 175 | .07 | 1.8 | 1 |
| 28559 | 7/64 | 175 | .07 | 3.8 | 1 |
| 28560 | 1/8 | 175 | .07 | 5.5 | 1 |
| 28587 | 9/64 | 175 | .07 | 8.0 | 1 |
| 28588 | 5/32 | 175 | .07 | 8.0 | 1 |



285 Hex Metric Interchangeable Blades For TorqueFix & TorqueVario Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | |
|-------|-----|-----|------|------|------|
| No. | mm | mm | lbs. | Nm | pkg. |
| 28545 | 1.5 | 175 | .07 | 0.9 | 1 |
| 28546 | 2.0 | 175 | .07 | 1.8 | 1 |
| 28547 | 2.5 | 175 | .07 | 3.8 | 1 |
| 28548 | 3.0 | 175 | .07 | 5.5 | 1 |
| 28549 | 4.0 | 175 | .07 | 8.0 | 1 |



285 TORXPlus® Blades For TorqueFix & TorqueVario TORXPlus® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|------|-----|-----|------|-----|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28571 | IP5 | 175 | 4.0 | .07 | 0.5 | 1 |
| 28572 | IP6 | 175 | 4.0 | .07 | 0.8 | 1 |
| 28573 | IP7 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28574 | IP8 | 175 | 4.0 | .07 | 2.0 | 1 |
| 28575 | IP9 | 175 | 4.0 | .07 | 3.0 | 1 |
| 28576 | IP10 | 175 | 4.0 | .07 | 4.5 | 1 |
| 28577 | IP15 | 175 | 4.0 | .07 | 6.6 | 1 |
| 28578 | IP20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28579 | IP25 | 175 | 4.0 | .07 | 8.0 | 1 |



285 MagicSpring TORX® Interchangeable Blades For TorqueFix & TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|------|-----|-----|------|-----|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28512 | T6 | 175 | 4.0 | .07 | 0.6 | 1 |
| 28527 | T7 | 175 | 4.0 | .07 | 0.9 | 1 |
| 28528 | T8 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28529 | T9 | 175 | 4.0 | .07 | 2.5 | 1 |
| 28530 | T10 | 175 | 4.0 | .07 | 3.8 | 1 |
| 28531 | T15 | 175 | 4.0 | .07 | 5.5 | 1 |
| 28532 | T20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28533 | T25 | 175 | 4.0 | .07 | 8.0 | 1 |



286 MagicSpring TORXPlus® Interchangeable Blades For TorqueFix & TorqueVario blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item | | | | Max. | | |
|-------|------|-----|-----|------|-----|------|
| No. | Size | mm | mm | lbs. | Nm | pkg. |
| 28611 | IP6 | 175 | 4.0 | .07 | 0.8 | 1 |
| 28612 | IP7 | 175 | 4.0 | .07 | 1.3 | 1 |
| 28613 | IP8 | 175 | 4.0 | .07 | 2.0 | 1 |
| 28614 | IP9 | 175 | 4.0 | .07 | 3.0 | 1 |
| 28616 | IP10 | 175 | 4.0 | .07 | 4.5 | 1 |
| 28617 | IP15 | 175 | 4.0 | .07 | 6.6 | 1 |
| 28618 | IP20 | 175 | 4.0 | .07 | 8.0 | 1 |
| 28619 | IP25 | 175 | 4.0 | .07 | 8.0 | 1 |

*None of the blades featured on this page will function in a TorqueVario Insulated Handle

Wiha TorqueControl Adapters



28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits

Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item | | | | Max. | |
|-------|------|-----|-----|------|------|
| No. | Size | mm | mm | lbs. | pkg. |
| 28882 | 1/4 | 162 | 4.0 | .09 | 1 |

Wiha Torque Cable Keys

Torque handles recommended
#28552 & #28504



286 Torque Cable Key For Threaded Hex Connectors

For torque controlled fastening of cable plug connectors with Hex heads. Used with Wiha-TorqueControl Screwdrivers.

| Item No. | Size | mm | mm | mm | Nm | lbs. | pkg. |
|----------|------|-----|----|-----|-----|------|------|
| 28620 | 8mm | 4.0 | 78 | 218 | 1.0 | .06 | 1 |
| 28622 | 9mm | 4.0 | 78 | 218 | 1.0 | .06 | 1 |
| 28624 | 11mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28626 | 12mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28627 | 13mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28629 | 14mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28632 | 17mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28633 | 18mm | 4.0 | 78 | 218 | 1.5 | .06 | 1 |
| 28637 | 22mm | 4.0 | 90 | 233 | 2.0 | .10 | 1 |



28644 Torque Cable Key For Threaded Hex Connectors - Inch

| Item No. | Size | mm | mm | mm | Nm | lbs. | pkg. |
|----------|------|-----|----|-----|-----|------|------|
| 28644 | 1/2" | 4.0 | 78 | 218 | 1.5 | .06 | 1 |

easyTorque Control Handles

"easy" Torque

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!



Each tool factory preset

Torque accuracy of +/- 10% to 5000 cycles

Economical Torque Control for tooling assembly and repair

Reverse torque is 50% greater for easy removal using same tool

Uses 285 Series interchangeable blades on pg. 6



292 easyTorque Screwdriver Handle

easyTorque value pre-set. Release accuracy +/- 10%. SoftFinish cushion grip handle for good power transfer.

| Item No. | Pre-Sets | Inch/lbs. | Nm | mm | Inch | lbs. | pkg. |
|----------|----------|-----------|-----|-----|------|------|------|
| 29205 | 4.4 | 0.5 | 130 | 5.1 | .20 | 1 | |
| 29206 | 5.3 | 0.6 | 130 | 5.1 | .20 | 1 | |
| 29209 | 8.0 | 0.9 | 130 | 5.1 | .20 | 1 | |
| 29211 | 9.7 | 1.1 | 130 | 5.1 | .20 | 1 | |
| 29212 | 10.6 | 1.2 | 130 | 5.1 | .20 | 1 | |
| 29214 | 12.4 | 1.4 | 130 | 5.1 | .20 | 1 | |
| 29220 | 17.7 | 2.0 | 130 | 5.1 | .20 | 1 | |
| 29225 | 22.1 | 2.5 | 130 | 5.1 | .20 | 1 | |
| 29230 | 26.6 | 3.0 | 130 | 5.1 | .20 | 1 | |
| 29238 | 33.6 | 3.8 | 130 | 5.1 | .20 | 1 | |
| 29241 | 35.4 | 4.0 | 130 | 5.1 | .20 | 1 | |
| 29245 | 39.8 | 4.5 | 130 | 5.1 | .20 | 1 | |
| 29251 | 44.2 | 5.0 | 130 | 5.1 | .20 | 1 | |

* No Calibration Certificates



292 easyTorque Screwdriver Handle With TORX® Blades

easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

| Item No. | Pre-Sets | Size | Inch/lbs. | Nm | lbs. | pkg. |
|----------|----------|------|-----------|-----|------|------|
| 29232 | T5 | 4.4 | 0.5 | .24 | 1 | |
| 29233 | T6 | 5.3 | 0.6 | .24 | 1 | |
| 29234 | T7 | 8.0 | 0.9 | .24 | 1 | |
| 29236 | T8 | 10.6 | 1.2 | .25 | 1 | |
| 29237 | T9 | 12.4 | 1.4 | .25 | 1 | |
| 29239 | T10 | 17.7 | 2.0 | .26 | 1 | |
| 29242 | T15 | 26.6 | 3.0 | .26 | 1 | |
| 29243 | T20 | 35.4 | 4.0 | .26 | 1 | |
| 29244 | T25 | 44.2 | 5.0 | .28 | 1 | |

* No Calibration Certificates



292 easyTorque Screwdriver Handle With TORXPlus® Blades

easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

| Item No. | Pre-Sets | Size | Inch/lbs. | Nm | lbs. | pkg. |
|----------|----------|------|-----------|-----|------|------|
| 29246 | IP5 | 4.4 | 0.5 | .24 | 1 | |
| 29247 | IP6 | 5.3 | 0.6 | .24 | 1 | |
| 29248 | IP7 | 8.0 | 0.9 | .24 | 1 | |
| 29249 | IP8 | 10.6 | 1.2 | .25 | 1 | |
| 29252 | IP9 | 12.4 | 1.4 | .25 | 1 | |
| 29253 | IP10 | 17.7 | 2.0 | .26 | 1 | |
| 29254 | IP15 | 26.6 | 3.0 | .26 | 1 | |
| 29255 | IP20 | 35.4 | 4.0 | .26 | 1 | |
| 29256 | IP25 | 44.2 | 5.0 | .28 | 1 | |

* No Calibration Certificates

Wiha TorqueControl Adapters

Adapters For TorqueFix™ & TorqueVario™



28581 Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item No. | Size | mm | mm | lbs. | pkg. |
|----------|------|-----|-----|------|------|
| 28581 | 1/4 | 149 | 4.0 | .09 | 1 |



28582 Square Drive Adapter For 1/4" Sockets Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item No. | Size | mm | mm | lbs. | pkg. |
|----------|------|-----|-----|------|------|
| 28582 | 1/4 | 145 | 4.0 | .08 | 1 |



28583 Adapter Blade For 4mm MicroBits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item No. | Size | mm | mm | lbs. | pkg. |
|----------|------|-----|-----|------|------|
| 28583 | 4.0 | 149 | 4.0 | .09 | 1 |

Wiha TorqueControl Adjustable iTorque

iTorque Screwdrivers

- Metric (Nm) & Inch (In-lbs / oz)
- Built in click counter
- Auto shut off
- Fast adjusting
- Cycle Counter
- Accurate +/- 6%



Digital Torque Control

Interchangeable blades or bits

With Certificate of Calibration Included



4mm bit holder included

288 iTorque Screwdriver Handles

EN ISO 6789, BS EN 26789, ASME B107.14M. Handle reads Nm & Inch/lbs. with built in click counter. Fast adjusting. Accurate +/- 6% Each iTorque handle includes a 4mm bit holder.

| Item No. | Adjustable Maximum Torque | Adjustable | pkg. 1 | | |
|----------|---------------------------|-------------|--------|------|------|
| | | | mm | Inch | lbs. |
| 28886 | 60-210(in/oz.) | 40-150(Ncm) | 134 | 5.3 | .44 |
| 28887 | 7-26 in/lbs. | 0.8-3.0 Nm | 134 | 5.3 | .44 |
| 28889 | 9-45 in/lbs. | 1.0-6.0 Nm | 134 | 5.3 | .44 |

* Calibration Certificates Included



Quick Adjusting

Digital Display

Push Button Start Push Button Conversion

Fast Conversion Nm to In/lbs.

With Certificate of Calibration



52 Pc. Set

28891 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 60-210 in/oz. 40-150 Ncm, 50 insert bits & 1/4" bit holder.

| | |
|-------|---|
| Item | Slotted: 4.5, 5.5, 6.5, 8.0mm |
| No. | Phillips: #0, #1, #2, #3 |
| 28891 | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3 |
| lbs. | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.56 9/64, 5/32, 3/16" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm |
| | Pozidriv: #0, #1, #2, #3 |
| | Torq Set: #4, #5, #6, #8 |
| | Square: #1, #2, #3 |
| | Triwing: #0, #1, #2, #3, #4 |
| | iTorque Handle Range 60 - 210 Inch/oz. |
| | 28581 - 1/4" Bit Holder |

With Certificate of Calibration



52 Pc. Set

28892 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 7-26 in/lbs. 0.8-3.0 Nm, 50 insert bits & 1/4" bit holder.

| | |
|-------|---|
| Item | Slotted: 4.5, 5.5, 6.5, 8.0mm |
| No. | Phillips: #0, #1, #2, #3 |
| 28892 | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3 |
| lbs. | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.57 9/64, 5/32, 3/16" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm |
| | Pozidriv: #0, #1, #2, #3 |
| | Torq Set: #4, #5, #6, #8 |
| | Square: #1, #2, #3 |
| | Triwing: #0, #1, #2, #3, #4 |
| | iTorque Handle Range 7 - 26 Inch/lbs. |
| | 28581 - 1/4" Bit Holder |

With Certificate of Calibration



52 Pc. Set

28896 52 Piece iTorque Bit Set, In Metal Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 9-50 in/lbs. 1.0-6.0 Nm, 50 insert bits & 1/4" bit holder.

| | |
|-------|---|
| Item | Slotted: 4.5, 5.5, 6.5, 8.0mm |
| No. | Phillips: #0, #1, #2, #3 |
| 28896 | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3 |
| lbs. | Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.61 9/64, 5/32, 3/16" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm |
| | Pozidriv: #0, #1, #2, #3 |
| | Torq Set: #4, #5, #6, #8 |
| | Square: #1, #2, #3 |
| | Triwing: #0, #1, #2, #3, #4 |
| | iTorque Handle Range 9 - 45 Inch/lbs. |
| | 28581 - 1/4" Bit Holder |

Wiha SYSTEM 4 Micro Bits



750 SYSTEM 4 Slotted Bits High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75008 | 0.8 | 28 | 1.1 | .01 |
| 75012 | 1.2 | 28 | 1.1 | .01 |
| 75015 | 1.5 | 28 | 1.1 | .01 |
| 75018 | 1.8 | 28 | 1.1 | .01 |
| 75020 | 2.0 | 28 | 1.1 | .01 |
| 75025 | 2.5 | 28 | 1.1 | .01 |
| 75030 | 3.0 | 28 | 1.1 | .01 |
| 75035 | 3.5 | 28 | 1.1 | .01 |
| 75040 | 4.0 | 28 | 1.1 | .01 |



751 SYSTEM 4 Phillips Bits High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75105 | 000 | 28 | 1.1 | .01 |
| 75110 | 00 | 28 | 1.1 | .01 |
| 75115 | 0 | 28 | 1.1 | .01 |
| 75120 | 1 | 28 | 1.1 | .01 |



753 SYSTEM 4 Hex Inch Bits High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Inch | mm | Inch | lbs. |
| 75307 | .028 | 28 | 1.1 | .01 |
| 75309 | .035 | 28 | 1.1 | .01 |
| 75313 | .050 | 28 | 1.1 | .01 |
| 75350 | 1/16 | 28 | 1.1 | .01 |
| 75352 | 5/64 | 28 | 1.1 | .01 |
| 75354 | 3/32 | 28 | 1.1 | .01 |
| 75356 | 7/64 | 28 | 1.1 | .01 |
| 75358 | 1/8 | 28 | 1.1 | .01 |
| 75360 | 9/64 | 28 | 1.1 | .01 |
| 75340 | 5/32 | 28 | 1.1 | .01 |



757 SYSTEM 4 TORX® Bits High alloy CVM steel, hardened, on 4 mm stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75701 | T1 | 28 | 1.1 | .01 |
| 75702 | T2 | 28 | 1.1 | .01 |
| 75703 | T3 | 28 | 1.1 | .01 |
| 75704 | T4 | 28 | 1.1 | .01 |
| 75705 | T5 | 28 | 1.1 | .01 |
| 75706 | T6 | 28 | 1.1 | .01 |
| 75707 | T7 | 28 | 1.1 | .01 |
| 75708 | T8 | 28 | 1.1 | .01 |
| 75709 | T9 | 28 | 1.1 | .01 |
| 75710 | T10 | 28 | 1.1 | .01 |
| 75715 | T15 | 28 | 1.1 | .01 |
| 75720 | T20 | 28 | 1.1 | .01 |



757 SYSTEM 4 Security TORX® Bits High alloy CVM steel, hardened, on 4 mm stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75735 | T10s | 28 | 1.1 | .01 |
| 75742 | T20s | 28 | 1.1 | .01 |



753 SYSTEM 4 Hex Metric Bits High alloy CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75307 | 0.7 | 28 | 1.1 | .01 |
| 75309 | 0.9 | 28 | 1.1 | .01 |
| 75313 | 1.3 | 28 | 1.1 | .01 |
| 75315 | 1.5 | 28 | 1.1 | .01 |
| 75320 | 2.0 | 28 | 1.1 | .01 |
| 75325 | 2.5 | 28 | 1.1 | .01 |
| 75330 | 3.0 | 28 | 1.1 | .01 |
| 75340 | 4.0 | 28 | 1.1 | .01 |



753 SYSTEM 4 Metric Security Hex Bits CVM steel, hardened, on 4 mm hex stock.

| Item | | | | |
|-------|-----|----|------|------|
| No. | mm | mm | Inch | lbs. |
| 75322 | 2.0 | 28 | 1.1 | .01 |
| 75327 | 2.5 | 28 | 1.1 | .01 |
| 75332 | 3.0 | 28 | 1.1 | .01 |
| 75342 | 4.0 | 28 | 1.1 | .01 |

753 SYSTEM 4 Security Hex Inch Bits

| Item | | | | |
|-------|------|----|------|------|
| No. | Inch | mm | Inch | lbs. |
| 75362 | 5/64 | 28 | 1.1 | .01 |
| 75364 | 3/32 | 28 | 1.1 | .01 |
| 75366 | 7/64 | 28 | 1.1 | .01 |
| 75368 | 1/8 | 28 | 1.1 | .01 |
| 75370 | 9/64 | 28 | 1.1 | .01 |
| 75372 | 5/32 | 28 | 1.1 | .01 |



757 SYSTEM 4 Pentalobe Bits High alloy CVM steel, hardened, on 4 mm stock.

| Item | | | | |
|-------|------|----|------|------|
| No. | Size | mm | Inch | lbs. |
| 75743 | PL1 | 28 | 1.1 | .01 |
| 75744 | PL2 | 28 | 1.1 | .01 |
| 75745 | PL3 | 28 | 1.1 | .01 |
| 75746 | PL4 | 28 | 1.1 | .01 |
| 75747 | PL5 | 28 | 1.1 | .01 |
| 75748 | PL6 | 28 | 1.1 | .01 |



753 SYSTEM 4 Metric & Inch Nut Setters CVM steel, hardened, on 4 mm hex stock.

| Item No. | | | | |
|----------|------|----|------|------|
| Metric | mm | mm | Inch | lbs. |
| 75820 | 2.0 | 30 | 1.2 | .01 |
| 75821 | 2.5 | 30 | 1.2 | .01 |
| 75822 | 3.0 | 30 | 1.2 | .01 |
| 75823 | 3.5 | 30 | 1.2 | .01 |
| 75824 | 4.0 | 30 | 1.2 | .01 |
| 75825 | 4.5 | 30 | 1.2 | .01 |
| 75826 | 5.0 | 30 | 1.2 | .01 |
| 75827 | 5.5 | 30 | 1.2 | .01 |
| Inch | Inch | mm | Inch | lbs. |
| 75810 | 5/64 | 30 | 1.2 | .01 |
| 75811 | 3/32 | 30 | 1.2 | .01 |
| 75812 | 7/64 | 30 | 1.2 | .01 |
| 75813 | 1/8 | 30 | 1.2 | .01 |
| 75814 | 9/64 | 30 | 1.2 | .01 |
| 75815 | 5/32 | 30 | 1.2 | .01 |
| 75816 | 3/16 | 30 | 1.2 | .01 |
| 75817 | 7/32 | 30 | 1.2 | .01 |

1/4" Drive Micro Bit Tool Adapters



75802 Micro Bit To 1/4" Drive Insert Bit Adapter uses magnets to hold 4mm Micro Bits

| Item | | | | |
|-------|------|----|-----|------|
| No. | Size | mm | mm | lbs. |
| 75802 | 4.0 | 25 | 4.0 | .01 |



75803 Long Micro Bit To 1/4" Drive Insert Bit Adapter uses spring clip non-magnetic to hold 4mm Micro Bits

| Item | | | | |
|-------|------|----|-----|------|
| No. | Size | mm | mm | lbs. |
| 75803 | 4.0 | 38 | 4.0 | .02 |

Wiha Adjustable TorqueControl Tool Sets In Durable Storage Cases



53 Pc. Set

With Certificate of Calibration



59 Pc. Set

With Certificate of Calibration



59 Pc. Set

With Certificate of Calibration

28595 53 Piece TorqueVario-S Bit Set, In Storage Box Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.

| | |
|--------------|--|
| Item | Slotted: 4.5, 5.5, 6.5, 8.0mm |
| No. | Phillips: #0, #1, #2, #3 |
| 28595 | TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30 |
| lbs. | Hex Inch: 1/16, 5/64, 3/32, 7/64, 2.04 1/8, 9/64, 5/32, 3/16" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm |
| | Pozidriv®: #0, #1, #2, #3 |
| | Torq Set: #4, #5, #6, #8 |
| | Square: #1, #2, #3 |
| | Tri-Wing: #0, #1, #2, #3, #4 |
| | 28506 - Handle Range 10-50 In/lbs. |
| | 28581 - 1/4" Bit Holder |

28589 59 Piece TorqueVario-S Bit Set, In Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

| | |
|--------------|---|
| Item | Slotted: 4.5, 5.5, 6.0mm |
| No. | Phillips: #0, #1, #2 |
| 28589 | TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30 |
| lbs. | Hex Inch: .050, 1/16, 5/64, 3/32, 2.73 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm |
| | Pozidriv®: #1, #2 |
| | Square: #1, #2, #3 |
| | Inch Sockets: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8" |
| | Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm |
| | 3 Handles: 15 - 80 In/oz., 5 - 10 & 10 - 50 In/lbs. |
| | 1/4" Bit Holder |
| | 1/4" Hex to 1/4" Square adapter |

28689 59 Piece Torque Newton Meter Bit Set, In Storage Box Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable Torque Nm handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

| | |
|--------------|---|
| Item | Slotted: 4.5, 5.5, 6.0mm |
| No. | Phillips: #0, #1, #2 |
| 28689 | TORX®: T5, T6, T7, T8, T9, T10, T15, T20, T25, T30 |
| lbs. | Hex Inch: .050, 1/16, 5/64, 3/32, 2.73 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4" |
| | Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm |
| | Pozidriv®: #1, #2 |
| | Square: #1, #2, #3 |
| | Inch Sockets: 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8" |
| | Metric Sockets: 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm |
| | 3 Handles: 0.1-0.6 Nm, 0.4-1.0 Nm & 1.0-5.0 Nm |
| | 1/4" Bit Holder |
| | 1/4" Hex to 1/4" Square adapter |




Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box



With Certificate of Calibration

28590 24 Pc. TorqueVario-S Micro-Bit Set

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.


| | |
|--|--|
| Item No. | Slotted: 1.5, 2.0, 3.0, 4.0mm |
| No. | Phillips: #00, #0, #1 |
| 28590 | TORX®: T6, T7, T8, T9, T10, T15 |
|  | Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32 |
| lbs. | 28404 - Handle Range 5 - 18 In/lbs. |
| 1.35 | |



With Certificate of Calibration

28593 24 Pc. TorqueVario-S Micro-Bit Set

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.

| | |
|--|--|
| Item No. | Slotted: 1.5, 2.0, 3.0, 4.0mm |
| No. | Phillips: #00, #0, #1 |
| 28593 | TORX®: T6, T7, T8, T9, T10, T15 |
|  | Hex Inch: .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32 |
| lbs. | 28501 - Handle Range 15-80 In/oz. (+/- 10%) |
| 1.35 | |

Wiha TorqueControl Sets In Durable Canvas Pouch




28596 8 Piece TorqueControl Set With Slotted & Phillips Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

| | |
|---|-------------------------------------|
| Item No. | 28596 |
| Slotted: | 2.5, 3.0, 3.5, 4.0mm |
|  | Phillips: #0, #1 |
| lbs. | 28404 - Handle Range 5 - 18 In/lbs. |

With Certificate of Calibration



28600 20 Piece TorqueControl Set With Slotted, Phillips, TORX®, Hex Inch Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 18 blades & Torque adjustment tool. Packed in a durable canvas pouch.

| | |
|---|--|
| Item No. | 28600 |
| Slotted: | 2.5, 3.5, 4.0mm |
| Phillips: | #0, #1, #2 |
|  | TORX®: T7, T8, T9, T10, T15, T20 |
| lbs. | Hex: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" |
| 1.38 | 28506 - Handle Range 10 - 50 In/lbs. |

With Certificate of Calibration



28597 8 Pc. TorqueControl Set With TORX® Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M

| | |
|-----------------|--------------------------------------|
| Item No. | 28597 |
| Blades: | T7, T8, T9, T10, T15, T20 |
| lbs. | 28506 - Handle Range 10 - 50 In/lbs. |

With Certificate of Calibration



28598 8 Piece TorqueControl Set With TORXPlus® Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M

| | |
|-----------------|--------------------------------------|
| Item No. | 28598 |
| Blades: | IP7, IP8, IP9, IP10, IP15, IP20 |
| lbs. | 28506 - Handle Range 10 - 50 In/lbs. |

With Certificate of Calibration



28599 14 Piece TorqueControl Set With TORX® & TORXPlus® Blades Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

| | |
|-----------------|--------------------------------------|
| Item No. | 28599 |
| Blades: | T7, T8, T9, T10, T15, T20 |
| lbs. | 28506 - Handle Range 10 - 50 In/lbs. |

With Certificate of Calibration







Wiha Insulated TorqueControl Tools

Includes Certificate






1000V

287 Insulated TorqueVario-S, With Window Scale Insulation  up to 1000Volt EN ISO, BS EN, ASME, VDE, ASTM & NFPA70E standards, +/- 6% Accuracy. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. (Requires Insulated Blade Holder #28350-Not Included)

| Item No. | Range |  |  |  |
|----------|-----------|---|---|---|
| No. | Inch lbs. | Increments | mm | lbs. pkg. |
| 28724 | 5 - 18 | .5 In.lbs. | 131 | .43 1 |
| 28726 | 10 - 50 | 2 In.lbs. | 138 | .40 1 |
| 28727 | 18 - 62 | 2 In.lbs. | 142 | .69 1 |

Each TorqueVario handle has unique serial number and certificate of calibration

287 Insulated TorqueVario-S Handle - In Newton Meter Scale (Requires Insulated Blade Holder #28350-Not Included)

| Item No. | Range |  |  |  |
|----------|-----------|---|---|---|
| No. | Nm | mm | lbs. | pkg. |
| 28734 | 0.5 - 2.0 | 131 | .45 | 1 |
| 28736 | 0.8 - 5.0 | 138 | .45 | 1 (.2 Nm Increment) |
| 28738 | 2.0 - 7.0 | 142 | .72 | 1 |

Wiha Insulated SlimLine Torque Blade Holder

1000Volt








28350 Insulated SlimLine Torque Blade Holder CVM steel. Through hardened black finish. ClicFix quick release holder securely locks blades.

| Item No. | OAL | OAL |  |  |  |
|----------|-----|-----|---|---|---|
| No. | mm | mm | Inch | lbs. | pkg. |
| 28350 | 6.0 | 170 | 6.75 | .06 | 1 |

Wiha Insulated SlimLine Blades







283 Insulated Slotted SlimLine Blades High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. |  |  | Slim | Max | Inch/ |  |  |  |
|----------|---|---|------|-----|-------|---|--|---|
| No. | mm | Inch | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28307 | 2.5 | .098 | 4.0 | 0.4 | 3.5 | .02 | 1 | |
| 28308 | 3.0 | .118 | 4.0 | 0.6 | 5.3 | .02 | 1 | |
| 28310 | 3.5 | .141 | 4.0 | 0.6 | 5.3 | .02 | 1 | |
| 28309 | 4.0 | .157 | 4.0 | 2.5 | 22.1 | .02 | 1 | |
| 28312 | 5.5 | .216 | 6.0 | 3.8 | 33.6 | .02 | 1 | |
| 28315 | 6.5 | .255 | 6.0 | 5.5 | 48.7 | .02 | 1 | |







283 Insulated Phillips SlimLine Blades High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|--|------|-----|-------|--|---|--|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28317 | 1 | 4.0 | 3.8 | 33.6 | .02 | 1 | |
| 28319 | 2 | 6.0 | 5.5 | 48.7 | .02 | 1 | |







283 Insulated Xeno Slotted Pozidriv SlimLine Blades Up to 33% narrower insulation dia. than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|--|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28320 | 1 | 4.0 | 3.8 | 33.6 | .02 | 1 | |
| 28321 | 2 | 6.0 | 5.5 | 48.7 | .02 | 1 | |







283 Insulated Xeno Slotted & Phillips SlimLine Blades High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|--|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28327 | 1 | 4.0 | 3.8 | 33.7 | .02 | 1 | |
| 28329 | 2 | 6.0 | 5.5 | 48.8 | .02 | 1 | |







283 Insulated Pozidriv SlimLine Blades SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|---|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28330 | 1 | 4.0 | 3.8 | 33.7 | .02 | 1 | |
| 28331 | 2 | 6.0 | 5.5 | 48.8 | .02 | 1 | |







283 Insulated Hex Metric SlimLine Blades SlimLine blades have up to 33% narrower insulation dia. than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|---|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28332 | 1.5 | 4.0 | 0.9 | 7.9 | .02 | 1 | |
| 28333 | 2.0 | 4.0 | 1.8 | 15.9 | .02 | 1 | |
| 28334 | 2.5 | 4.0 | 3.8 | 33.6 | .02 | 1 | |
| 28335 | 3.0 | 4.0 | 5.5 | 48.7 | .02 | 1 | |
| 28336 | 4.0 | 6.0 | 5.5 | 48.7 | .02 | 1 | |
| 28337 | 5.0 | 6.0 | 5.5 | 48.7 | .02 | 1 | |
| 28338 | 6.0 | 6.0 | 5.5 | 48.7 | .02 | 1 | |







283 Insulated TORX SlimLine Blades High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.


| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|---|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28339 | T8 | 4.0 | 1.3 | 11.5 | .02 | 1 | |
| 28344 | T9 | 4.0 | 1.3 | 11.5 | .02 | 1 | |
| 28340 | T10 | 4.0 | 3.8 | 33.6 | .02 | 1 | |
| 28341 | T15 | 6.0 | 5.5 | 48.7 | .02 | 1 | |
| 28342 | T20 | 6.0 | 5.5 | 48.7 | .02 | 1 | |
| 28343 | T25 | 6.0 | 5.5 | 48.7 | .02 | 1 | |



283 Insulated Square SlimLine Blades High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

| Item No. |  | Slim | Max | Inch/ |  |  |  |
|----------|---|------|-----|-------|---|---|---|
| No. | Size | Dia. | Nm | lbs. | lbs. | lbs. | pkg. |
| 28346 | 1 | 4.0 | 3.8 | 33.6 | .02 | 1 | |
| 28347 | 2 | 6.0 | 5.5 | 48.7 | .02 | 1 | |

Wiha Insulated Torque Ratchet Wrenches



1000Volt

301 Insulated Torque Ratchet

Wrenches, 1/4, 3/8, 1/2" Drives Insulated to EN/IEC 60900:2004, ASTM F1505-10, CSA Standards Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 10%. Dual scale reading Ft. lbs. / Nm.

| Item No. | OAL | OAL | | | |
|----------|------|-----|------|--------|------|
| No. | Inch | mm | Inch | Nm | lbs. |
| 30114 | 1/4" | 210 | 8.25 | 5-25 | 1.02 |
| 30138 | 3/8" | 370 | 14.5 | 5-50 | 2.72 |
| 30152 | 1/2" | 530 | 21.0 | 40-220 | 3.64 |



1000Volt

30190 16 Pc. Inch Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set

CV steel, forged, oil-hardened sockets.

| Item No. | 3/8" Drive Sockets: |
|----------|---|
| 30190 | 1/4, 9/32, 5/16, 11/32, 3/8, 7/16 |
| | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" |
| | 3/8" x 125mm Extension Bar |
| 8.80 | 3/8" x 250mm Extension Bar |
| | 3/8" Drive Ratcheting Torque Wrench - 5-50 Nm |

*Sockets must be used with insulated ratchets & extensions



1000Volt

30192 16 Pc. Metric Insulated 3/8" Drive Ratcheting Torque Wrench & Socket Set

| Item No. | 3/8" Drive Sockets: |
|----------|--|
| 30192 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20mm |
| | 3/8" x 125mm Extension Bar |
| 8.80 | 3/8" x 250mm Extension Bar |
| | 3/8" Drive Ratcheting Torque Wrench - 5-50 Nm |

*Sockets must be used with insulated ratchets & extensions

ESD Safe Adjustable TorqueControl Tools

With Certificate of Calibration



28591 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

| Item No. | Slotted: | Phillips: | Hex Inch: |
|----------|--|-------------|--|
| 28591 | 1.5, 2.0, 3.0, 4.0mm | #00, #0, #1 | .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" |
| 1.57 | 28524 - Handle ESD Safe Range 5 - 10 Inch lbs. | | |



Includes Certificate

285 ESD Safe TorqueVario-S, With Window Scale EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 6% Accuracy.

Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. With Certificate of accuracy. Pkg. 1

| Item No. | Range | Increments | mm | lbs. |
|----------|-----------------|------------|---------|------|
| 28522* | 15 - 80 (in/oz) | 2.5 In.oz. | 122-127 | .33 |
| 28524 | 5 - 10 | .2 In.lbs. | 122-127 | .34 |

| Item No. | Range | Increments | mm | lbs. |
|----------|--------|------------|---------|------|
| 28426 | 5 - 18 | .5 In.lbs. | 126-131 | .46 |

Each TorqueVario handle has unique serial number and certificate of calibration

With Certificate of Calibration



28895 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

| Item No. | Slotted: | Phillips: | Hex Metric: | Pentalobe: |
|----------|--|---------------|------------------------|--------------------|
| 28895 | 0.8, 1.2, 1.5, 2.0mm | #000, #00, #0 | T1, T2, T3, T4, T5, T6 | PL1, PL2, PL3, PL4 |
| 1.30 | 28500 - Handle ESD Safe .04 - .46Nm (+/-10%) | | | |

With Certificate of Calibration



Packed in a compact durable storage box

+/- 10%


28890 24 Piece TorqueVario-S ESD Safe Micro-Bit Set

Certified to EN ISO 6789, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool.






| Item No. | Slotted: | Phillips: | Hex Inch: |
|----------|--|-------------|--|
| 28890 | 1.5, 2.0, 3.0, 4.0mm | #00, #0, #1 | .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32" |
| 1.35 | 28522 - ESD Safe Handle Range 15-80 Inch/oz. | | |

ESD Safe TorqueControl Tools



 Includes Certificate

285 ESD Safe TorqueVario-S Newton Meter, With Window Scale EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 10% Accuracy. Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. With Certificate of accuracy.

| Item No. | Range |  |  |  |  |  |
|----------|-----------|---|---|---|---|---|
| No. | Nm | mm | Inch | lbs. | pkg. | |
| 28500 | .04 - .46 | 124 | 4.875" | .35 | 1 | |

ESD TorqueVario handle has unique serial number and certificate of calibration



288 ESD Safe Pentalobe IPR Interchangeable Blades For TorqueVario-S Newton Meter Handle tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, hard chromed.

| Item No. | Size | mm | mm | lbs. | pkg. |
|----------|------|-----|-----|------|------|
| 28818 | PL1 | 175 | 4.0 | .07 | 1 |



288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S

| Item No. | mm | Inch | mm | Nm | lbs. | pkg. |
|----------|-----|------|-----|-----|------|------|
| 28805 | 3.0 | .118 | 175 | 0.6 | .07 | 1 |
| 28809 | 4.0 | .157 | 175 | 2.5 | .07 | 1 |



288 ESD Safe TORX Interchangeable Blades For TorqueVario-S

| Item No. | Size | mm | mm | Nm | lbs. | pkg. |
|----------|------|-----|-----|-----|------|------|
| 28825 | T5 | 175 | 4.0 | 0.4 | .07 | 1 |
| 28827 | T7 | 175 | 4.0 | 0.9 | .07 | 1 |
| 28829 | T9 | 175 | 4.0 | 2.5 | .07 | 1 |



28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

| Item No. | Size | mm | mm | lbs. | pkg. |
|----------|------|-----|-----|------|------|
| 28882 | 1/4 | 162 | 4.0 | .09 | 1 |

T-handle TorqueControl Handles



Accuracy Ergonomic multi-component handle, light & compact

Includes Calibration Certificate

289 TorqueFix T-handle EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 6%

| Item No. | Torque In-lbs. | Torque Nm | mm x mm | lbs. | pkg. |
|----------|----------------|-----------|----------|------|------|
| 28931 | 53.1 | 6 | 56 x 120 | .81 | 1 |
| 28933 | 70.8 | 8 | 56 x 120 | .82 | 1 |
| 28935 | 88.5 | 10 | 56 x 120 | .79 | 1 |
| 28937 | 106.2 | 12 | 56 x 120 | .79 | 1 |
| 28938 | 110.6 | 12.5 | 56 x 120 | .80 | 1 |
| 28939 | 123.9 | 14 | 56 x 120 | .80 | 1 |

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate

28940 Adjustable TorqueVario STplus T-handle EN ISO 6789, BS EN 26789, ASME B107.14M, +/- 6%

| Item No. | Torque Nm | Torque In-lbs. | mm x mm | lbs. | pkg. |
|----------|-----------|----------------|----------|------|------|
| 28940 | 5-14 | 44.3-123.9 | 56 x 120 | .81 | 1 |

* (1 Nm 8.8507) (Scale is shown in Nm only)

T-handle TorqueControl Blades



289 TORX Interchangeable Blades For TorqueFix T-Handle TORX tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

| Item No. | Size | mm | Inch | mm | lbs. | pkg. |
|----------|------|-----|------|-----|------|------|
| 28903 | T15 | 130 | 5.1 | 6.0 | .10 | 1 |
| 28904 | T20 | 130 | 5.1 | 6.0 | .10 | 1 |
| 28905 | T25 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28906 | T27 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28907 | T30 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28908 | T40 | 130 | 5.1 | 6.0 | .11 | 1 |



289 TORXPlus Interchangeable Blades For TorqueFix T-Handle TORXPlus tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

| Item No. | Size | mm | Inch | mm | lbs. | pkg. |
|----------|------|-----|------|-----|------|------|
| 28910 | IP15 | 130 | 5.1 | 6.0 | .10 | 1 |
| 28911 | IP20 | 130 | 5.1 | 6.0 | .10 | 1 |
| 28912 | IP25 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28913 | IP27 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28914 | IP30 | 130 | 5.1 | 6.0 | .11 | 1 |
| 28915 | IP40 | 130 | 5.1 | 6.0 | .11 | 1 |



289 Hex Metric Interchangeable Blades For TorqueFix T-Handle Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item No. | mm | mm | Inch | lbs. | pkg. |
|----------|-----|-----|------|------|------|
| 28916 | 3.0 | 130 | 5.1 | .11 | 1 |
| 28917 | 4.0 | 130 | 5.1 | .11 | 1 |
| 28918 | 5.0 | 130 | 5.1 | .11 | 1 |
| 28919 | 6.0 | 130 | 5.1 | .11 | 1 |



289 Hex Inch Interchangeable Blades For TorqueFix T-Handle Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

| Item No. | Inch | mm | Inch | lbs. | pkg. |
|----------|------|-----|------|------|------|
| 28920 | 1/8 | 130 | 5.1 | .11 | 1 |
| 28921 | 9/64 | 130 | 5.1 | .11 | 1 |
| 28923 | 3/16 | 130 | 5.1 | .11 | 1 |
| 28924 | 7/32 | 130 | 5.1 | .11 | 1 |

Wiha T-handle TorqueControl Adapters



289 TorqueFix Adapter For 1/4" & 3/8" Sockets Shaft CVM steel, hardened, corrosion protected.

| Item No. | Size | mm | Inch | mm | lbs. | pkg. |
|----------|------|-----|------|-----|------|------|
| 28926 | 1/4 | 100 | 3.9 | 6.0 | .12 | 1 |
| 28927 | 3/8 | 100 | 3.9 | 6.0 | .15 | 1 |



28925 TorqueFix Quick Release Bit Holder Shaft CVM steel, hardened, corrosion protected.

| Item No. | Size | mm | Inch | mm | lbs. | pkg. |
|----------|------|-----|------|-----|------|------|
| 28925 | 1/4 | 125 | 4.9 | 6.0 | .15 | 1 |

Maximum Recommended Torque For Wiha Torque Blades

| Tip Size | Style | Maximum Torque | |
|----------|------------|----------------|-------------|
| | | Nm | in.lbs |
| T5 | TORX | .4 Nm | 3.5 in.lbs |
| T6 | TORX | .6 Nm | 5.31 in.lbs |
| T7 | TORX | .9 Nm | 7.9 in.lbs |
| T8 | TORX | 1.3 Nm | 11.5 in.lbs |
| T9 | TORX | 2.5 Nm | 22.1 in.lbs |
| T10 | TORX | 3.8 Nm | 33.6 in.lbs |
| T15 | TORX | 5.5 Nm | 48.7 in.lbs |
| T20 | TORX | 8.0 Nm | 70.8 in.lbs |
| T25 | TORX | 8.0 Nm | 70.8 in.lbs |
| IP5 | TORX Plus | .5 Nm | 4.4 in.lbs |
| IP6 | TORX Plus | .8 Nm | 7.0 in.lbs |
| IP7 | TORX Plus | 1.3 Nm | 11.5 in.lbs |
| IP8 | TORX Plus | 2.0 Nm | 17.7 in.lbs |
| IP9 | TORX Plus | 3.0 Nm | 26.5 in.lbs |
| IP10 | TORX Plus | 4.5 Nm | 39.8 in.lbs |
| IP15 | TORX Plus | 6.6 Nm | 58.4 in.lbs |
| IP20 | TORX Plus | 8.0 Nm | 70.8 in.lbs |
| IP25 | TORX Plus | 8.0 Nm | 70.8 in.lbs |
| 1.5 | Slotted | .15 Nm | 1.3 in.lbs |
| 2.0 | Slotted | .4 Nm | 3.5 in.lbs |
| 2.5 | Slotted | .4 Nm | 3.5 in.lbs |
| 3.0 | Slotted | .6 Nm | 5.31 in.lbs |
| 3.5 | Slotted | 1.1 Nm | 9.7 in.lbs |
| 4.0 | Slotted | 2.5 Nm | 22.1 in.lbs |
| #000 | Phillips | .4 Nm | 3.5 in.lbs |
| #00 | Phillips | .4 Nm | 3.5 in.lbs |
| #0 | Phillips | .9 Nm | 7.9 in.lbs |
| #1 | Phillips | 3.8 Nm | 33.6 in.lbs |
| #2 | Phillips | 5.5 Nm | 48.6 in.lbs |
| 1.5 | Hex Metric | .9 Nm | 7.9 in.lbs |
| 2.0 | Hex Metric | 1.8 Nm | 15.9 in.lbs |
| 2.5 | Hex Metric | 3.8 Nm | 33.6 in.lbs |
| 3.0 | Hex Metric | 5.5 Nm | 48.6 in.lbs |
| 4.0 | Hex Metric | 8.0 Nm | 70.8 in.lbs |
| .050 | Hex Inch | .4 Nm | 3.5 in.lbs |
| 1/16 | Hex Inch | .9 Nm | 7.9 in.lbs |
| 5/64 | Hex Inch | 1.8 Nm | 15.9 in.lbs |
| 3/32 | Hex Inch | 1.8 Nm | 15.9 in.lbs |
| 7/64 | Hex Inch | 3.8 Nm | 33.6 in.lbs |
| 1/8 | Hex Inch | 5.5 Nm | 48.6 in.lbs |
| 9/64 | Hex Inch | 8.0 Nm | 70.8 in.lbs |
| 5/32 | Hex Inch | 8.0 Nm | 70.8 in.lbs |

Numerical Index by Item Number

| Item No. | Page | Item No. | Page | Item No. | Page | Item No. | Page | Item No. | Page |
|----------|------|----------|------|----------|------|----------|------|----------|------|
| 28307 | 13 | 28365 | 4 | 28521 | 5 | 28568 | 6 | 28689 | 10 |
| 28308 | 13 | 28374 | 4 | 28522 | 14 | 28569 | 6 | 28724 | 13 |
| 28309 | 13 | 28375 | 4 | 28523 | 5 | 28571 | 6 | 28726 | 13 |
| 28310 | 13 | 28376 | 4 | 28524 | 14 | 28572 | 6 | 28727 | 13 |
| 28312 | 13 | 28377 | 4 | 28525 | 5 | 28573 | 6 | 28734 | 13 |
| 28315 | 13 | 28378 | 4 | 28527 | 6 | 28574 | 6 | 28736 | 13 |
| 28317 | 13 | 28379 | 4 | 28528 | 6 | 28575 | 6 | 28738 | 13 |
| 28319 | 13 | 28380 | 4 | 28529 | 6 | 28576 | 6 | 28740 | 12 |
| 28320 | 13 | 28381 | 4 | 28530 | 6 | 28577 | 6 | 28741 | 12 |
| 28321 | 13 | 28382 | 4 | 28531 | 6 | 28578 | 6 | 28742 | 12 |
| 28327 | 13 | 28383 | 4 | 28532 | 6 | 28579 | 6 | 28750 | 12 |
| 28329 | 13 | 28384 | 4 | 28533 | 6 | 28581 | 7 | 28751 | 12 |
| 28330 | 13 | 28385 | 4 | 28534 | 6 | 28582 | 7 | 28752 | 12 |
| 28331 | 13 | 28386 | 4 | 28535 | 6 | 28583 | 7 | 28791 | 12 |
| 28332 | 13 | 28387 | 4 | 28536 | 6 | 28587 | 6 | 28792 | 12 |
| 28333 | 13 | 28388 | 4 | 28537 | 6 | 28588 | 6 | 28795 | 12 |
| 28334 | 13 | 28389 | 4 | 28538 | 6 | 28589 | 10 | 28805 | 14 |
| 28335 | 13 | 28404 | 5 | 28539 | 6 | 28590 | 11 | 28809 | 14 |
| 28336 | 13 | 28408 | 5 | 28540 | 6 | 28591 | 14 | 28818 | 15 |
| 28337 | 13 | 28410 | 5 | 28541 | 6 | 28593 | 11 | 28825 | 14 |
| 28338 | 13 | 28411 | 5 | 28542 | 6 | 28595 | 10 | 28827 | 14 |
| 28339 | 13 | 28412 | 5 | 28543 | 6 | 28596 | 11 | 28828 | 14 |
| 28340 | 13 | 28413 | 5 | 28544 | 6 | 28597 | 11 | 28829 | 14 |
| 28341 | 13 | 28414 | 5 | 28545 | 6 | 28598 | 11 | 28882 | 6,15 |
| 28342 | 13 | 28415 | 5 | 28546 | 6 | 28599 | 11 | 28886 | 8 |
| 28343 | 13 | 28416 | 5 | 28547 | 6 | 28600 | 11 | 28887 | 8 |
| 28344 | 13 | 28417 | 5 | 28548 | 6 | 28611 | 6 | 28889 | 8 |
| 28346 | 13 | 28418 | 5 | 28549 | 6 | 28612 | 6 | 28890 | 14 |
| 28347 | 13 | 28419 | 5 | 28550 | 5 | 28613 | 6 | 28891 | 8 |
| 28349 | 4 | 28426 | 14 | 28551 | 5 | 28614 | 6 | 28892 | 8 |
| 28350 | 13 | 28500 | 15 | 28552 | 5 | 28616 | 6 | 28895 | 14 |
| 28351 | 4 | 28501 | 5 | 28553 | 5 | 28617 | 6 | 28896 | 8 |
| 28352 | 4 | 28502 | 5 | 28555 | 6 | 28618 | 6 | 28903 | 15 |
| 28353 | 4 | 28503 | 5 | 28556 | 6 | 28619 | 6 | 28904 | 15 |
| 28354 | 4 | 28505 | 5 | 28557 | 6 | 28620 | 7 | 28905 | 15 |
| 28355 | 4 | 28506 | 5 | 28558 | 6 | 28622 | 7 | 28906 | 15 |
| 28356 | 4 | 28507 | 5 | 28559 | 6 | 28624 | 7 | 28907 | 15 |
| 28357 | 4 | 28509 | 5 | 28560 | 6 | 28626 | 7 | 28908 | 15 |
| 28358 | 4 | 28511 | 5 | 28561 | 6 | 28627 | 7 | 28910 | 15 |
| 28359 | 4 | 28512 | 6 | 28562 | 6 | 28629 | 7 | 28911 | 15 |
| 28360 | 4 | 28513 | 5 | 28563 | 6 | 28632 | 7 | 28912 | 15 |
| 28361 | 4 | 28515 | 5 | 28564 | 6 | 28633 | 7 | 28913 | 15 |
| 28362 | 4 | 28517 | 5 | 28565 | 6 | 28637 | 7 | 28914 | 15 |
| 28363 | 4 | 28518 | 5 | 28566 | 6 | 28644 | 7 | 28915 | 15 |
| 28364 | 4 | 28519 | 5 | 28567 | 6 | 28655 | 5 | 28916 | 15 |

MANUFACTURING
EXCELLENCE
AWARD
BESTES KMU
2014

WIHA – WINNER OF THE
MX AWARD 2014.
GERMANY'S BEST SME.

wiha 
Tools that work for you

PROFESSIONAL TORQUE CONTROL



(800) 494-6104
fax: (800) 494-7456
cservice@wihatools.com
www.wihatools.com

Catalog Item No. 99001.wo
version - 3/1/19

Subject to change
without notice

©2019 Willi Hahn Corporation

®Torx is a registered trademark of
Acument Intellectual Properties LLC.



Wiha Quality Tools

1348 Dundas Circle
Monticello, MN 55362
tel: 763.295.6591
fax: 763.295.6598

Wiha Tools Canada Ltd.

www.wihatools.ca
Brampton, ONT L6T 4X4
tel: 866.494.0096 or 763.295.6591
fax: 763.295.6598



To:



99977.wo - Pliers/Crimpers Catalog



99004.wo - Shop Tools Catalog



99914.wo - TORX Catalog



99951.wo - Bits Catalog



99919.wo - Insulated Catalog



99902.wo - Screwdrivers Catalog



99934.wo - Hex Tools Catalog



99906.wo - Tech Tools Catalog



99945.wo - ESD Catalog



99907.wo - Merchandise Catalog