
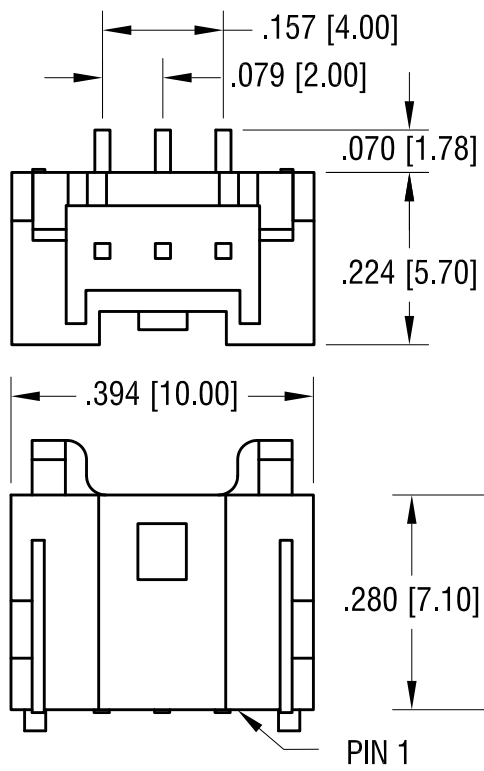
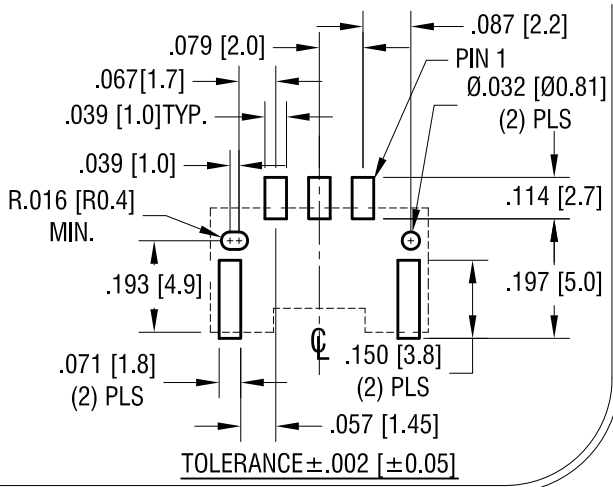



THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

ACTUAL SIZE



CONNECTOR SPECIFICATION

1. HOUSING: MAT'L- PA66, UL94V-0
2. POST: MAT'L- COPPER ALLOY
TIN PLATED
3. WAFER: MAT'L- GLASS FILLED PBT, UL94V-0
COLOR- NATURAL

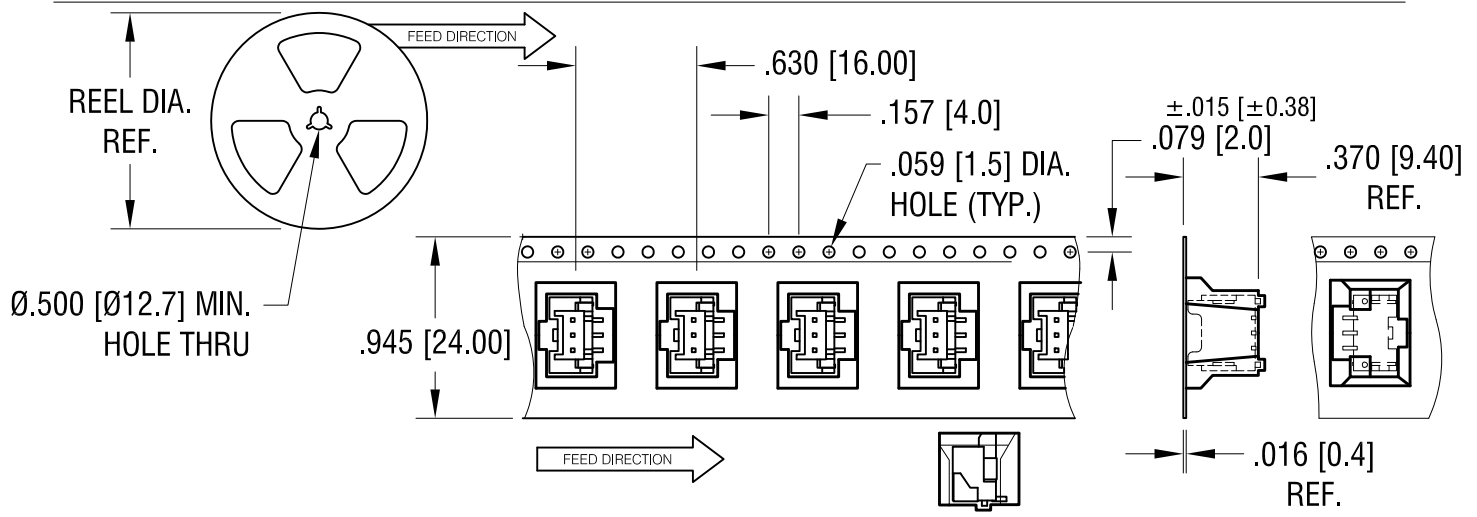

TAPE AND REEL SPECIFICATIONS:

4. TAPE: MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
5. REEL: 15.0 [380.8] DIA. 500 PIECES PER REEL
6. KAPTON TAPE TO BE APPLIED TO TOP SURFACE OF EACH CONNECTOR FOR VACUUM PICK AND PLACE

9.8.20	WAS PICK-UP CAP USED CONTACT WAS BRASS HOUSING WAS PA6T CHANGE AS PER ECN20-076	D
10.09.19	CONTACT WAS COPPER ALLOY HOUSING WAS PA66 CHANGE AS PER ECN 19-078	C
8.29.19	REMOVE MTG LEGS, USED PICKUP TOP INSTEAD OF KAPTON TAPE. CHANGE AS PER ECN 19-075	B
8.08.19	UPDATE MTG DETAIL CHANGE AS PER ECN 19-065	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500			
PART NAME			
SM TOP ENTRY CONNECTOR (3 CIRCUITS)			
MATERIAL			
AS NOTED			
FINISH		DRN BY	DATE
AS NOTED		NT	3.07.16
		APP'D	SCALE
		RH	4X
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	± .005 [± 0.13]	C	974
ANGULAR	± 1°	UNLESS OTHERWISE SPECIFIED	