


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00129	Connector, dc plug, 5.5x2.5xL18.5 mm, molding style, spring contacts	1	
2	30-00415	Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, 87A, red and black	1	
3	24-00006	Overmold, PVC, black	1	

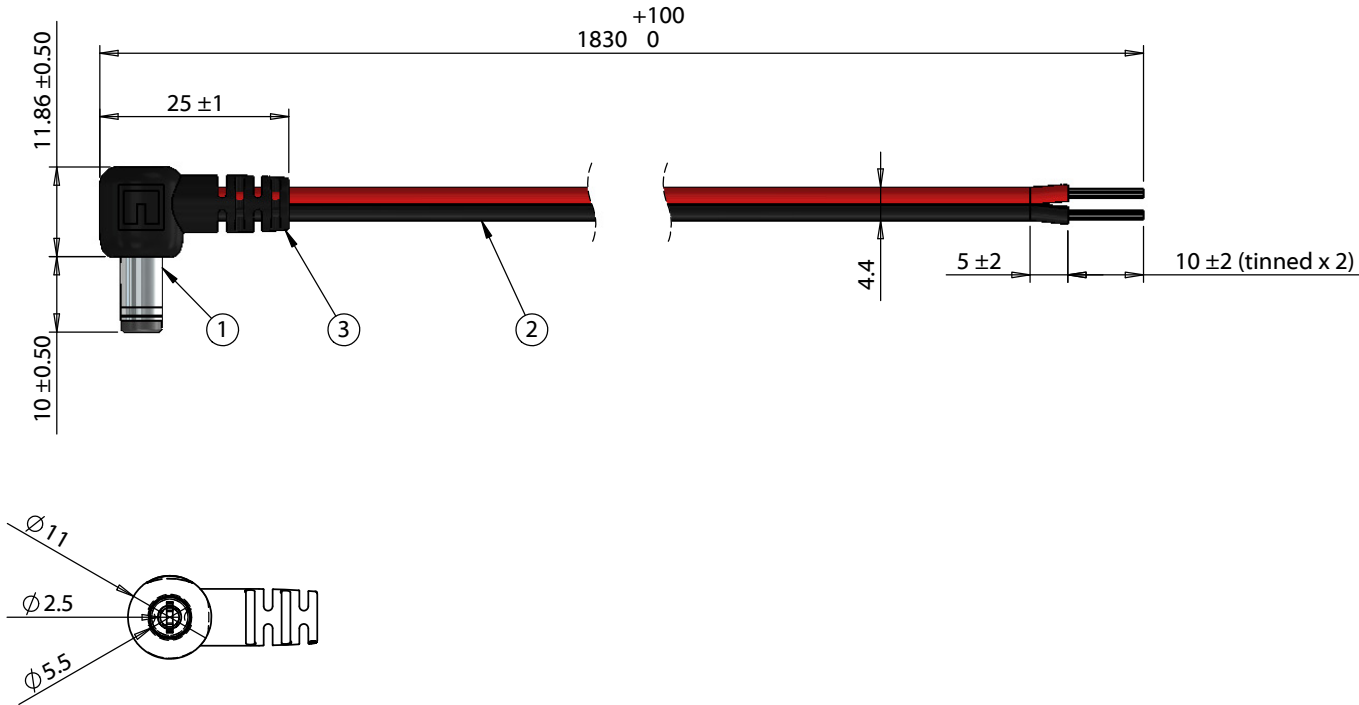

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Electrical requirements: 7 A, 12 Vdc

Wiring Diagram	
50-00129	wire color
center	red
sleeve	black

Revision:	Date:	Description:	Prepared: GL 2016.06.17 11:59:05 -07'00'	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	7/25/2014	Initial release	Verified: LA Digitally signed by LA DN: cn=LA, o=Tensility, email=LA@Tensility.com, c=US Date: 2016.06.17 14:16:51 +0500'	RoHS compliant	
A1	5/7/2015	Updated notes section	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent	
				Description: Cable, 1830 mm, 5.5x2.5x10 mm 90° 50-00129 dc plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire	
Scale: 1:1		Part number: A 10-01779		Sheet 1 of 1	