

# Data sheet

## 15307.2 SD-B 37CZ



Interface module for D-SUB, Tension-spring connection and female D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 37

### Business data

|  |                  |
|--|------------------|
| Article number                             | <u>15307.2</u>   |
| Article name                               | SD-B 37CZ        |
| GTIN (EAN)                                 | 4044211078768    |
| Packaging unit                             | 1                |
| Quantity unit                              | PC               |
| Weight per piece (not including packaging) | 94.2 g           |
| Weight per piece (including packaging)     | 137.05 g         |
| Unit of weight                             | G                |
| Customs number                             | 85369010         |
| Country of origin                          | NL               |
| Product description                        | Interface module |

# Data sheet

## 15307.2 SD-B 37CZ

### Technical data

#### Dimensions

|                  |        |
|------------------|--------|
| Length           | 47 mm  |
| Width            | 107 mm |
| Height TS 35/7.5 | 36 mm  |

#### Ratings

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Contamination degree | 2   |

#### Connection data

|  |                           |
|--|---------------------------|
| Connection principle                                     | Tension-spring connection |
| Number of connections                                    | 1                         |
| No. of poles   | 37                        |
| Wire cross-section single core (rigid), min.             | 0.08 mm <sup>2</sup>      |
| Wire cross-section single-core (rigid), max.             | 2.5 mm <sup>2</sup>       |
| Wire cross-section stranded, min.                        | 0.14 mm <sup>2</sup>      |
| Wire cross-section stranded, max.                        | 2.5 mm <sup>2</sup>       |
| Wire cross-section stranded with wire-end ferrules, min. | 0.14 mm <sup>2</sup>      |
| Wire cross-section stranded with wire-end ferrules, max. | 1.5 mm <sup>2</sup>       |
| Stripping length   | 6 mm                      |

#### Input data

|                                |       |
|--------------------------------|-------|
| Max. operating voltage AC/DC   | 125 V |
| Current load per channel, max. | 1,5 A |

#### Materials

|                           |        |
|---------------------------|--------|
| Working temperature, min. | -20 °C |
| Working temperature, max. | 50 °C  |

#### Further technical data

|                |                           |
|----------------|---------------------------|
| Mounting type  | TS 35                     |
| Connector type | D-sub female socket block |
| Test voltage   | 0.67 kV                   |
| Shielded       | ✓                         |

---

### Technical data

---

#### Environmental Product Compliance

---

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2022-01-07 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

---

---

### Approvals

---

#### Standards and regulations

---

Standards / specifications


DIN VDE 0110 / EN 50178

---

# Data sheet

## 15307.2 SD-B 37CZ

### Media

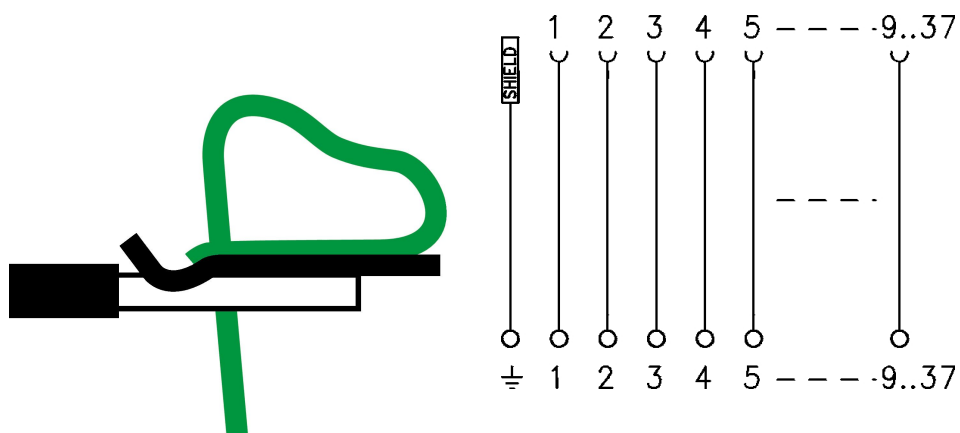

---

### Accessories

---