




| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 30-00914 | Wire, 3C BC, 26 AWG, UL20280, 300V, 80C, 4.3 mm, braided shield, FT2, TPU | 1 | |

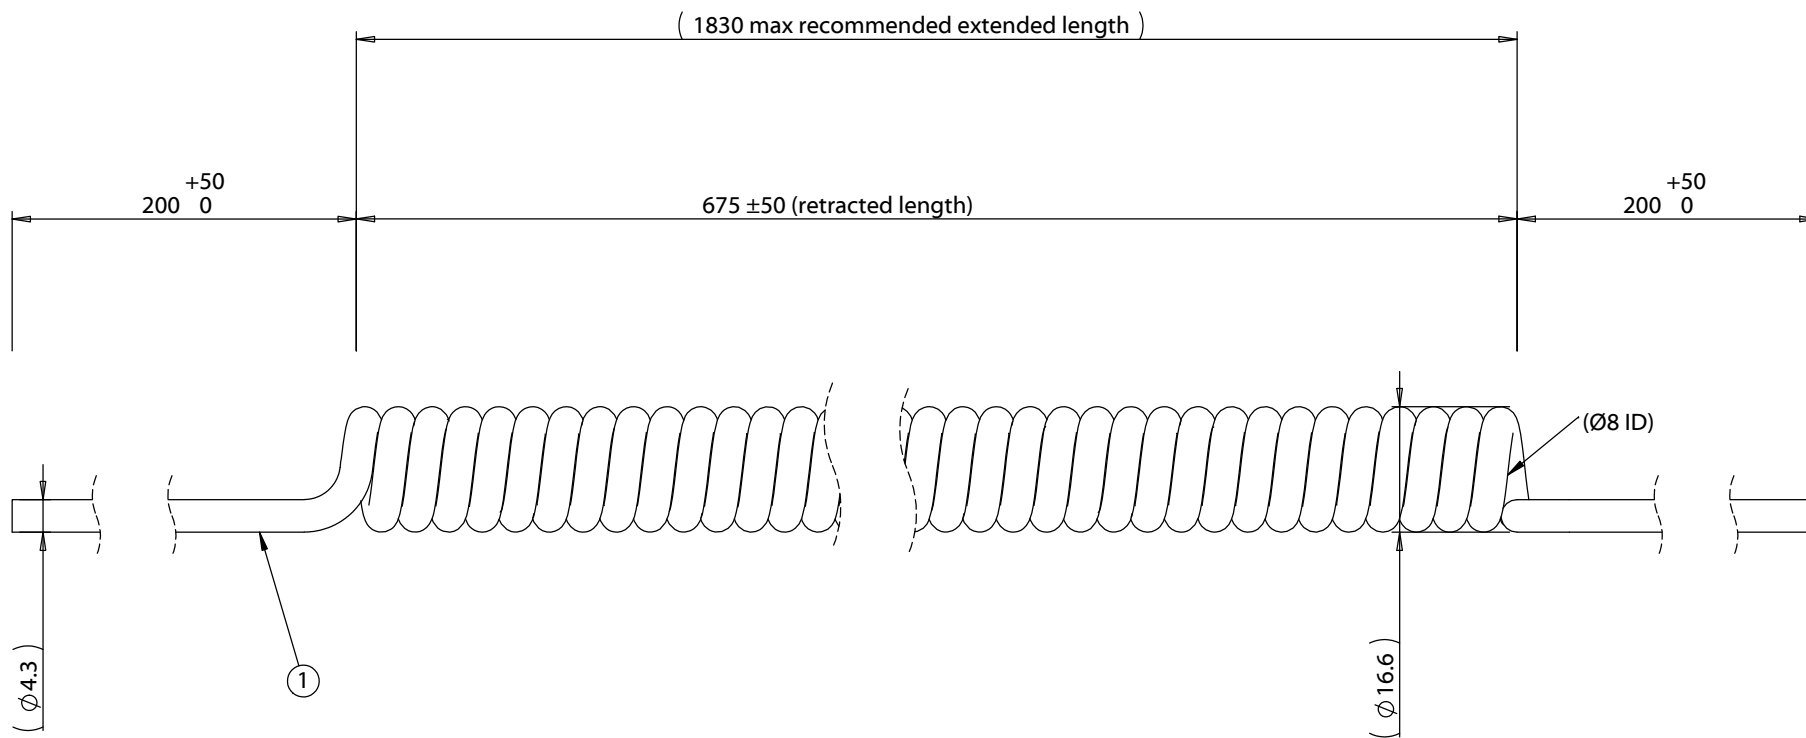

Notes:
Total wire length for resistance calculation: 6500 mm

| | | | | | | |
|-----------|------------|-----------------|--|---|---|--------------|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS and REACH compliant Phthalate and halogen free Function test: no open, no short circuit, no intermittent | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> | |
| A | 10/17/2018 | Initial release | Verified: | | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: | Size: Part number: | |
| | | | | Coiled cable, 2230 mm, 3C blunt cut to same, 26 AWG, 4.3 mm, TPU, shielded, 30-00914 wire | A 31-00031 | |
| | | | | Scale: 1:1 |   | Sheet 1 of 1 |

5

4

3

2

1