
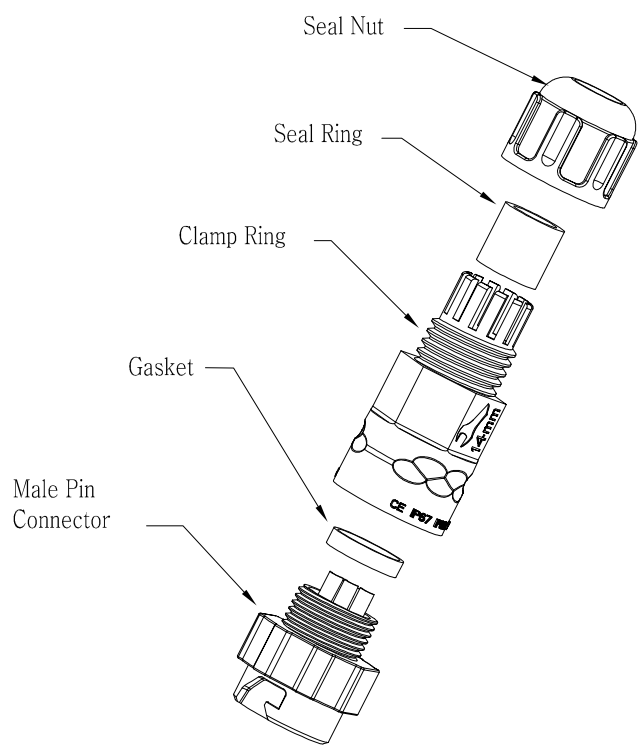
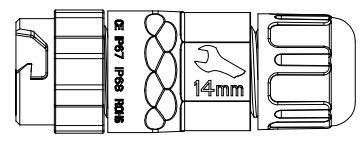




REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/08/13

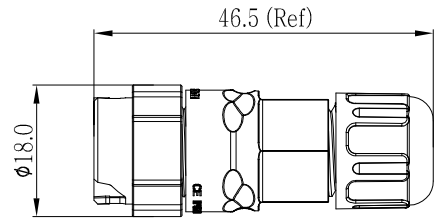

- Specification:
- 1.Operation Temperature:-45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 1000V AC
 - 5.Operating Current:2A
 - 6.Operating Voltage:AC 30V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.Gasket:Silicon, Red
 - 12.Male Pin:Copper Alloy, Gold Plated
 - 13.Connector:Nylon+ GF, Black
 - 14.RoHS Compliant.
 - 15.Cable Range OD:φ3.5mm~φ6.8mm
 - 16.Mating Cap:806-00062-00


22XXX331-01

Pin Number



10 Pin

P/N: 22010331-01



12 Pin

P/N: 22012331-01

Pin Assignments Front View

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

DESCRIPTION	
Standard Series Push Lock Female Plug With Male Pin	
SCALE: 1:1	SHEET 1 OF 1
REV. C1	SIZE A4
* :Inspection Item	

CHOGORI

PART NO	22XXX331-01	DRAWN BY	Liu	DATE	2019/08/13
DWG NO		CHECKED BY	Mo	DATE	2019/08/13
CUSTOMER		APPROVED BY	Panson	DATE	2019/08/13

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.