THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

ITEM	CONNECTOR PART NO.	DESCRIPTION
1	See Table 1	XSR CONNECTOR
2	UL11136, 36 AWG	RED

IPI CHECK	EOR CHECK

Applicable Tooling
BCD

TABLE 1

ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NUMBER	TOTAL WIRE REQUIRED
1	2	02XSR-36S	A02XSR02XSR36R295A	590 mm
1	4	04XSR-36S	A04XSR04XSR36R295A	1,180 mm
1	6	06XSR-36S	A06XSR06XSR36R295A	1,770 mm
1	10	10XSR-36S	A10XSR10XSR36R295A	2,950 mm
1	16	16XSR-36S	A16XSR16XSR36R295A	4,720 mm
1	20	20XSR-36S	A20XSR20XSR36R295A	5,900 mm
1	22	22XSR-36S	A22XSR22XSR36R295A	6,490 mm

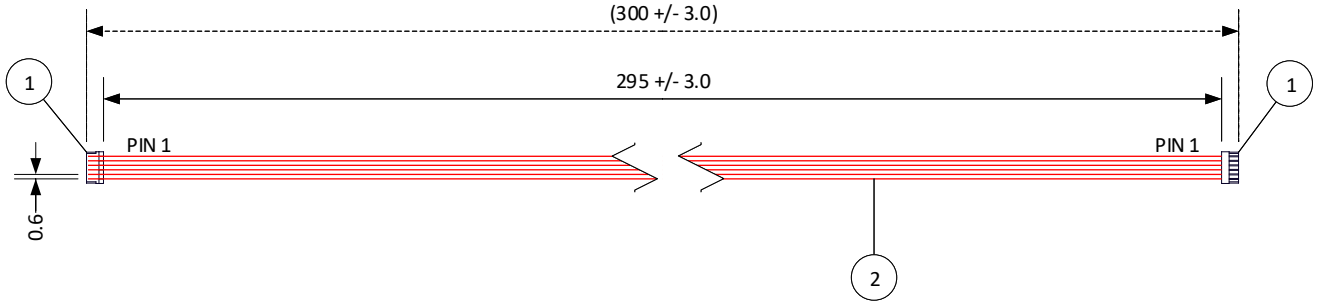

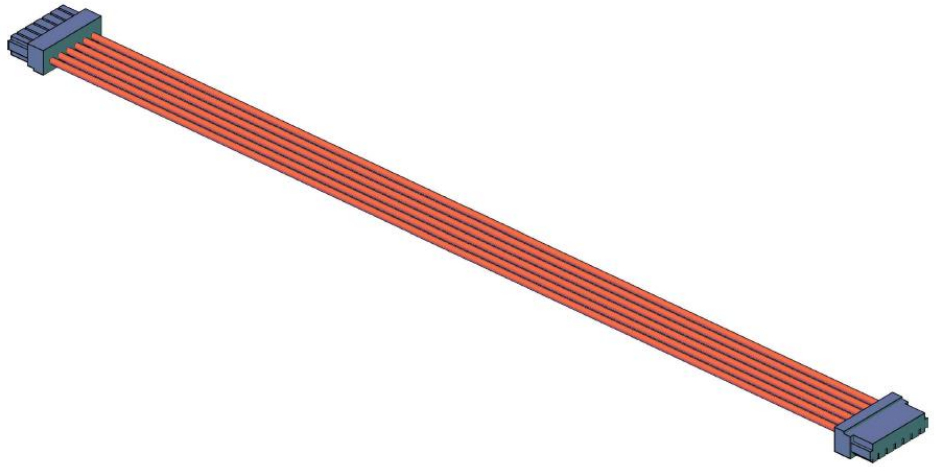

Electrical Specifications
Current: 0.2A AC/DC
Voltage: 30V AC/DC

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1: 1		

DIMENSIONS: All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.

DESCRIPTION: 0.6 mm Pitch XSR Standard Catalog Assembly – 11.5" Length – Pin out: 1 to 1

DRAWN BY	ASSEMBLY PART NO.
STEVEN PILKINGTON	SEE TABLE 1

CHECKED BY	DRAWING NO. & REVISION	REVISED
JUSTIN BAKER	GAM-003	2/25/2016

REV.	DESCRIPTION	DATE	BY
1	Add electrical specifications	6/27/2018	SP