



Part Number:	SC700208-1	
DESCRIPTION:	Dynamic Speaker	
DRAWN	CJ	9/4/2019
CHECKED	C.H.	9/4/2019
APPROVED	C.E.	9/4/2019

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

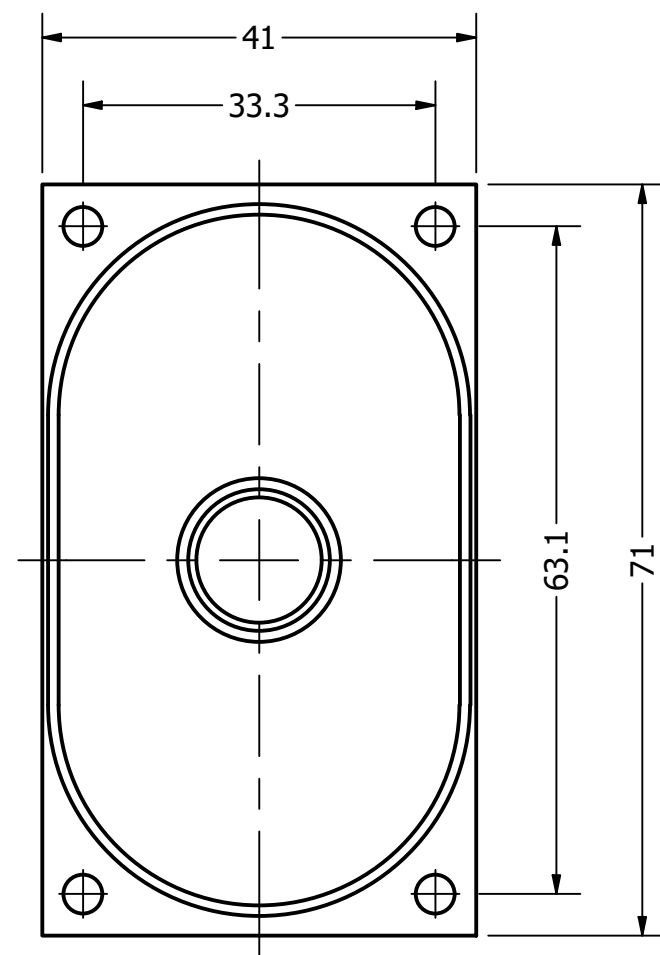

Side View

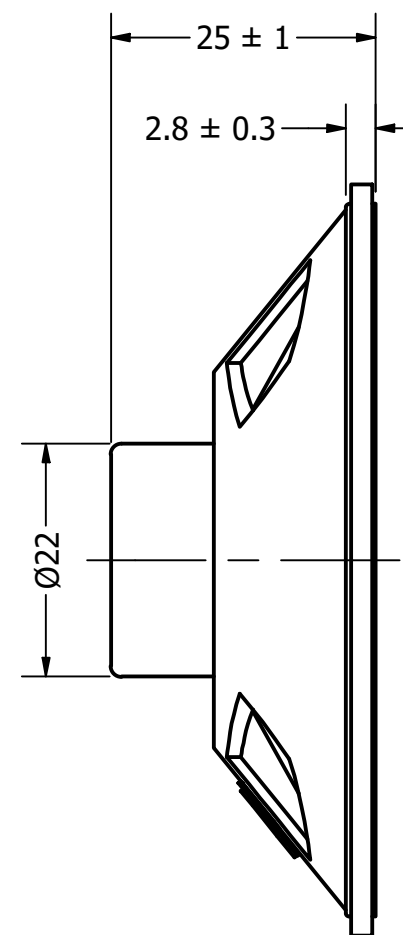

Bottom View

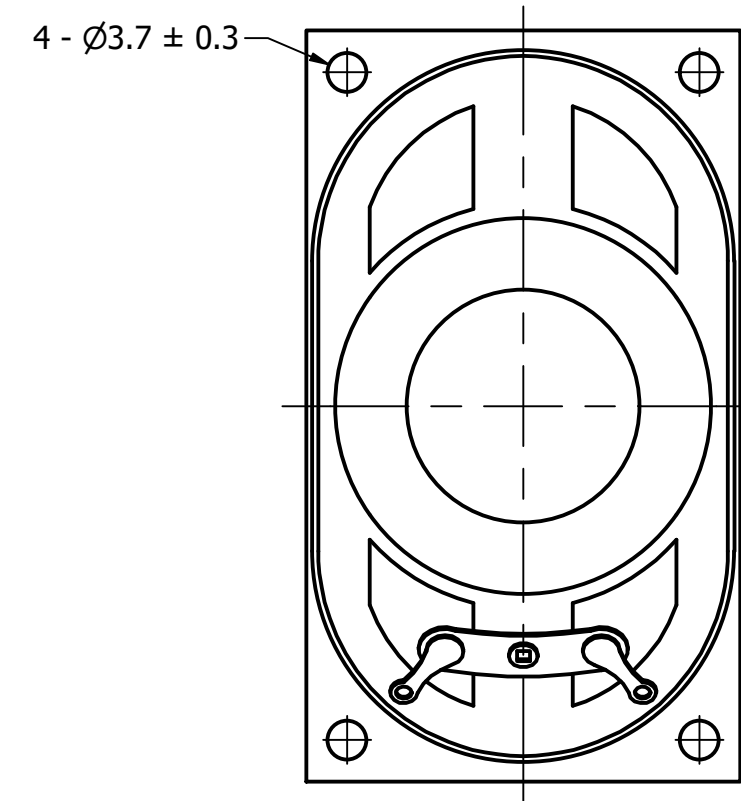

Items	Specifications	Conditions
Sound Pressure Level	100	dB (@ 1W/10cm)
Resonant Frequency	280 ± 20%	Hz
Frequency Range	200 ~ 20,000	Hz
Nominal Power	3	W
Max. Power	5	W
Impedance	8	Ω
Cone Material	Cloth	
Mount Type	Frame Mount	
Storage Temperature	-40 ~ +80	°C
Operating Temperature	-40 ~ +80	°C
Weight	38	g

REVISION HISTORY

REV	DESCRIPTION	DATE	APPROVED
	Released from Engineering	2/8/2014	J.S.
1	Updated drawing to new template, frequency, SPL, temps	9/4/2019	C.E.

NOTES

- 1) All dimensions are in mm unless otherwise noted
- 2) All tolerances are ± 0.5 mm unless otherwise noted
- 3) All parts meet RoHS
- 4) Subject to change or redrawn without notice