


Ultra-Small Ceramic Power Splitter/Combiner

QCN-34D+

2 Way-90° 50Ω 2500 to 3400 MHz



Generic photo used for illustration purposes only
CASE STYLE: FV1206-1

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3


Outline Drawing

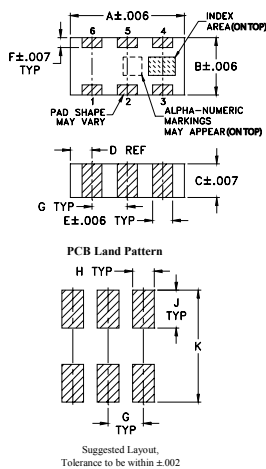

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
										grams
.126	.063	.035	.024	.022	.011	.039	.024	.042	.123	
3.20	1.60	0.89	0.61	0.56	0.28	0.99	0.61	1.07	3.12	.020

Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

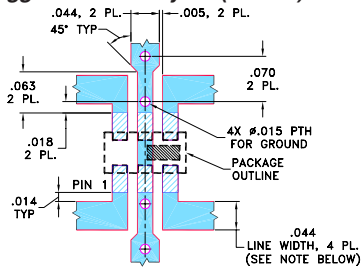

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low insertion loss, 0.4 dB typ.
- high isolation, 30 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"
- patent pending

Applications

- balanced amplifiers
- modulators
- MMDS
- defense communications

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
2500-3400									
2500-2800	32	23	0.4	0.6	1	3	0.4	0.9	1.15
2800-3400	26	20	0.5	0.7	1	4	0.5	1.2	1.15

1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2500.00	2.98	3.74	0.76	28.30	89.55	1.07	1.08	1.07
2525.00	2.99	3.72	0.73	28.62	89.57	1.07	1.08	1.07
2600.00	3.03	3.68	0.65	29.72	89.61	1.06	1.07	1.05
2650.00	3.05	3.67	0.61	30.42	89.64	1.05	1.06	1.04
2700.00	3.07	3.65	0.58	31.14	89.66	1.04	1.06	1.03
2825.00	3.11	3.63	0.52	32.59	89.71	1.03	1.05	1.02
2850.00	3.11	3.63	0.52	32.87	89.72	1.03	1.05	1.02
2950.00	3.12	3.64	0.52	33.11	89.72	1.02	1.04	1.03
3000.00	3.12	3.65	0.53	33.20	89.76	1.02	1.04	1.03
3075.00	3.12	3.68	0.56	32.83	89.78	1.02	1.03	1.04
3100.00	3.11	3.68	0.57	32.62	89.78	1.02	1.03	1.05
3175.00	3.10	3.72	0.62	32.01	89.80	1.03	1.02	1.05
3275.00	3.07	3.79	0.72	31.16	89.82	1.04	1.02	1.06
3375.00	3.03	3.87	0.84	30.26	89.87	1.05	1.01	1.07
3400.00	3.02	3.90	0.88	29.99	89.87	1.05	1.01	1.08

1. Total Loss = Insertion Loss + 3dB splitter loss.

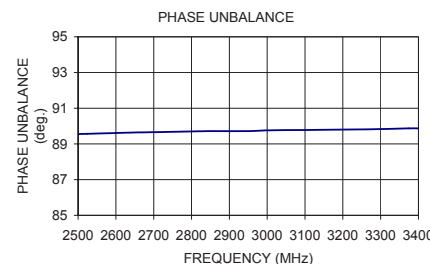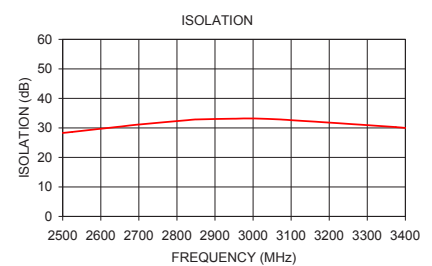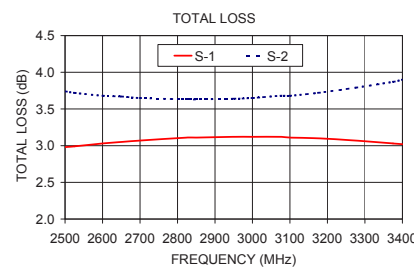

electrical schematic (Note 1)

