

6

5

4

3

2

1

D

D

C

C

B






B

A

A

NOTES:

- 1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
- 2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL.
- 3. PRODUCT SPECIFICATION: PS-45424-001.
- 4. PACKAGING SPECIFICATION: PK-45483-001.

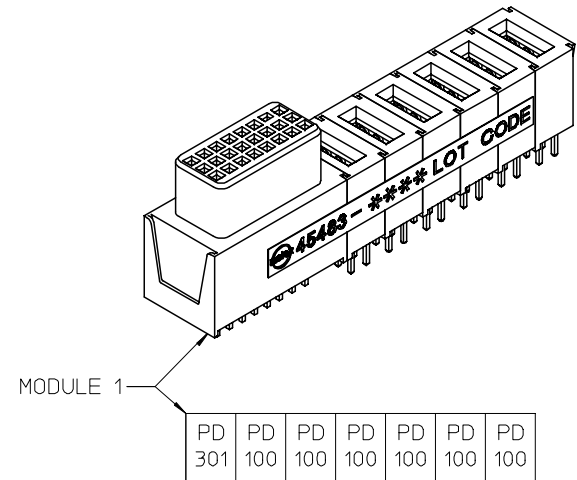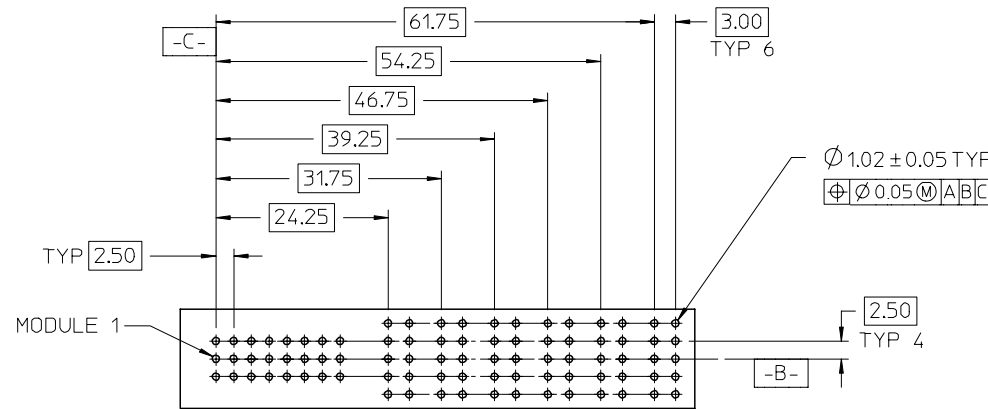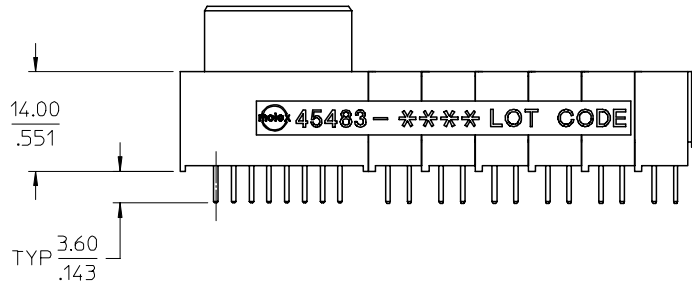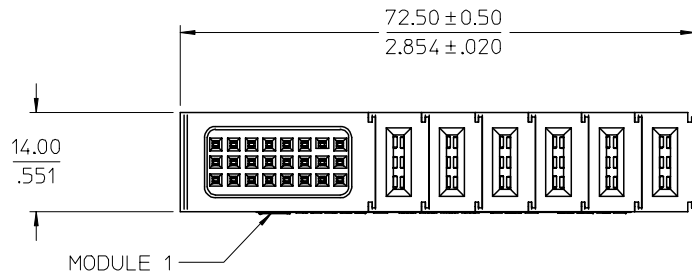

PCB LAYOUT: COMPONENT SIDE
 PCB THICKNESS: 2.36/.093
 PCB TOLERANCE: ±0.05/.002

INITIAL RELEASE	DESCRIPTION
EC NO: UCP2006-1090	
DRWN: ADRATNOL 2005/11/09	
CHKD: KSAMIEC 2005/11/10	
APPR: APATEL 2005/11/10	
A	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± ---	± ---
3 PLACES ± ---	± .010
2 PLACES ± 0.25	± .015
1 PLACE ± 0.38	± ---
ANGULAR ± 1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
ADRATNOL	2005/11/09
CHECKED BY	DATE
KSAMIEC	2005/11/09
APPROVED BY	DATE
APATEL	2005/11/09
MATERIAL NO.	
45483-0307	
SIZE	
A	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
1:1	METRIC	☉
TITLE		
POWER DOCK ASSEMBLY SOCKET VERTICAL SOLDER TAIL		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-45483-0307	1 OF 1	

5

4

3

2

1