

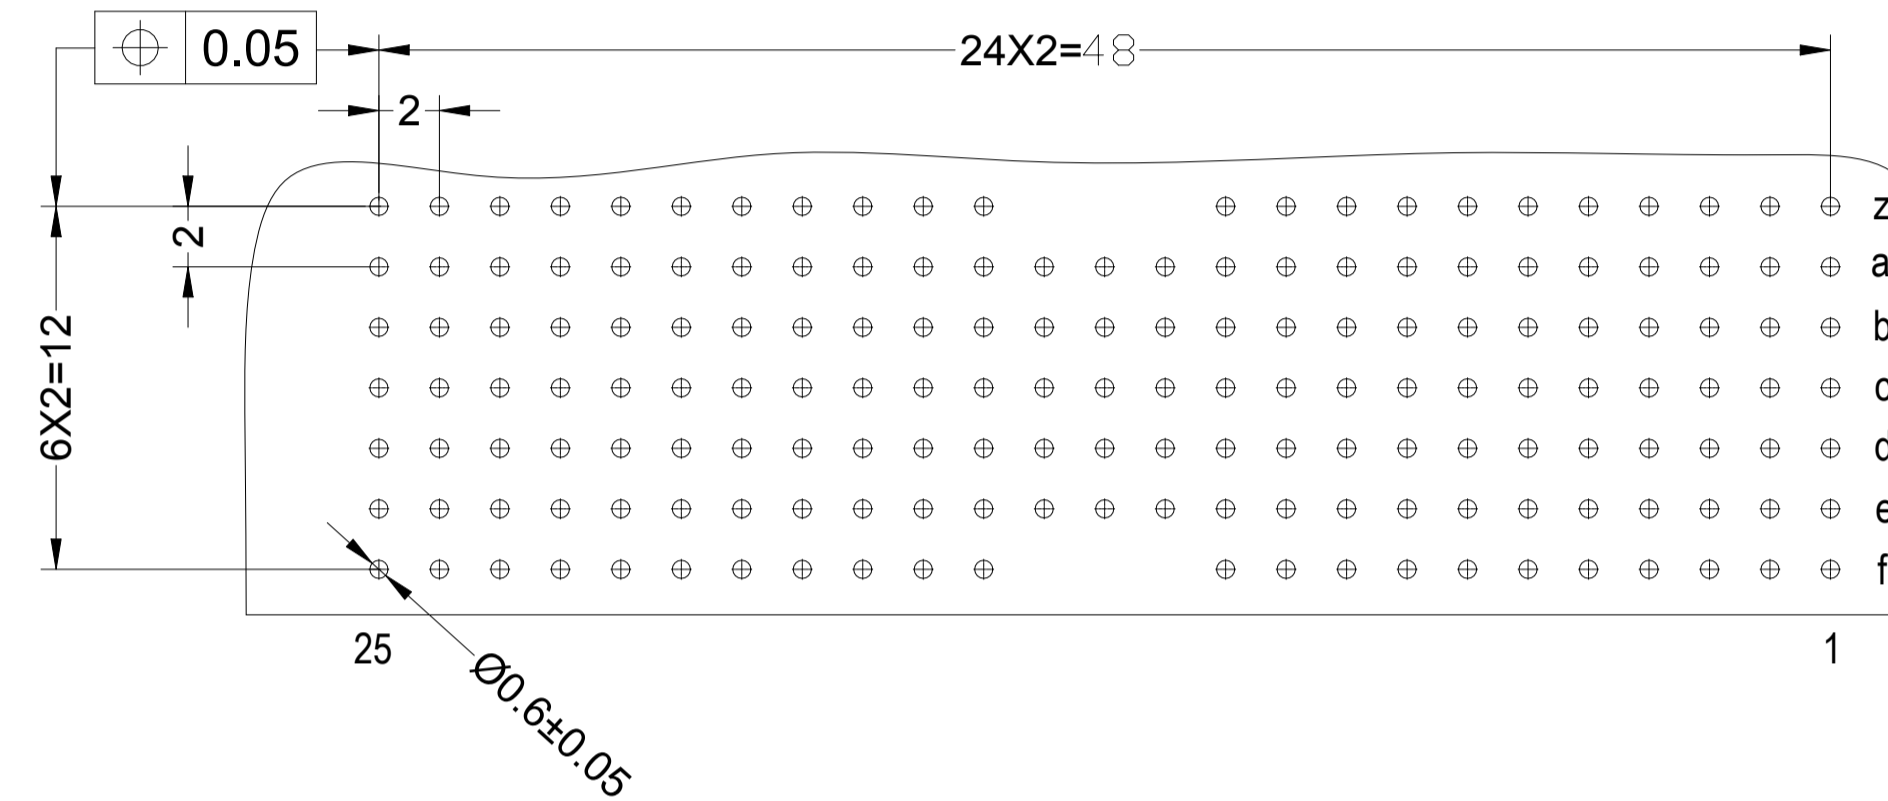
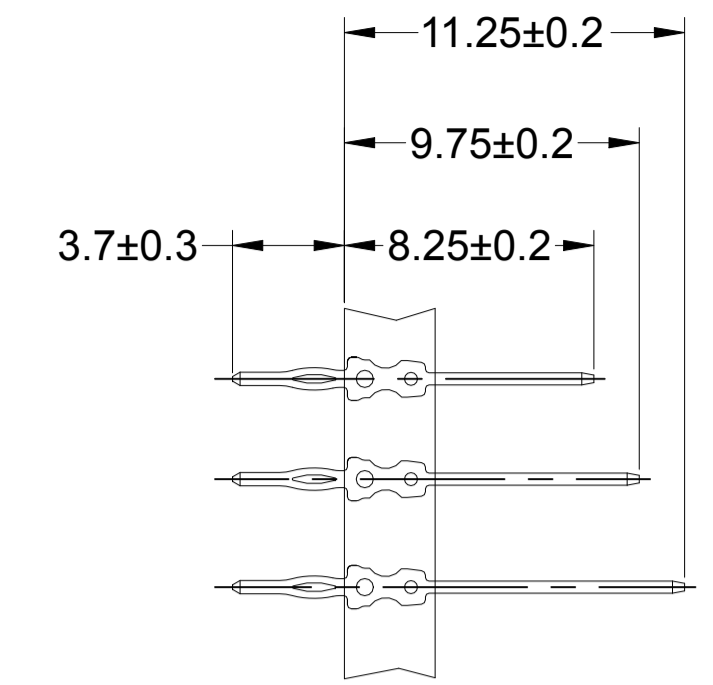
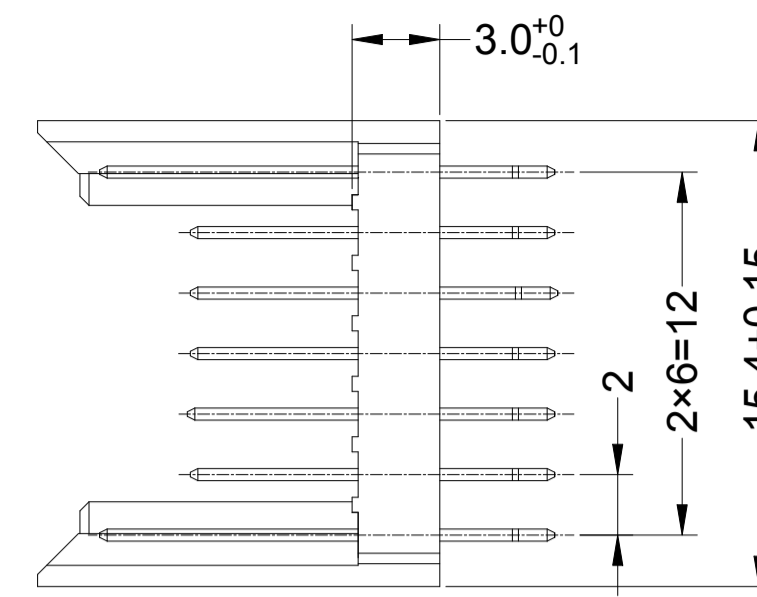


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPV
A		INITIAL DRAWING	18OCT2021	TL HL

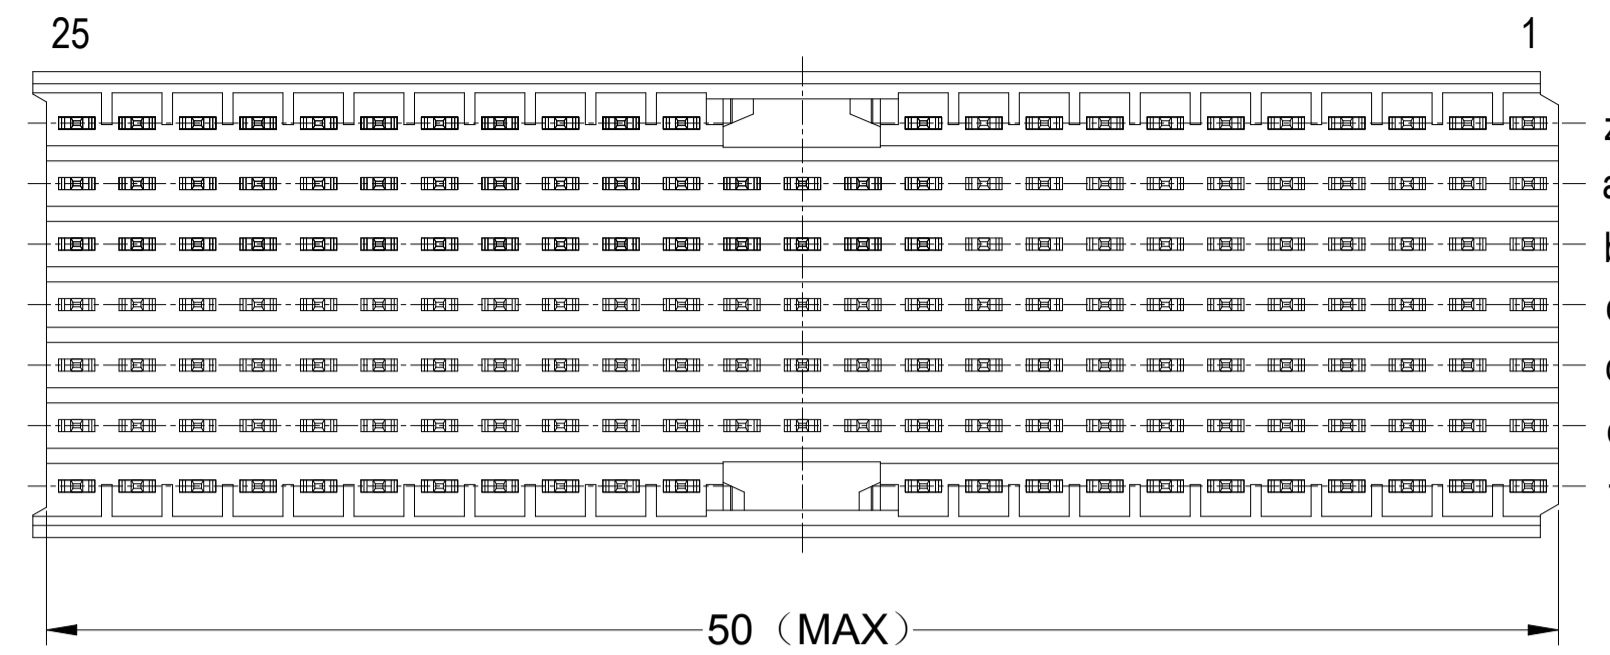

RECOMMEND PCB-HOLE LAYOUT
COMPONENT SIDE SHOWN
TOLERANCE ±0.05

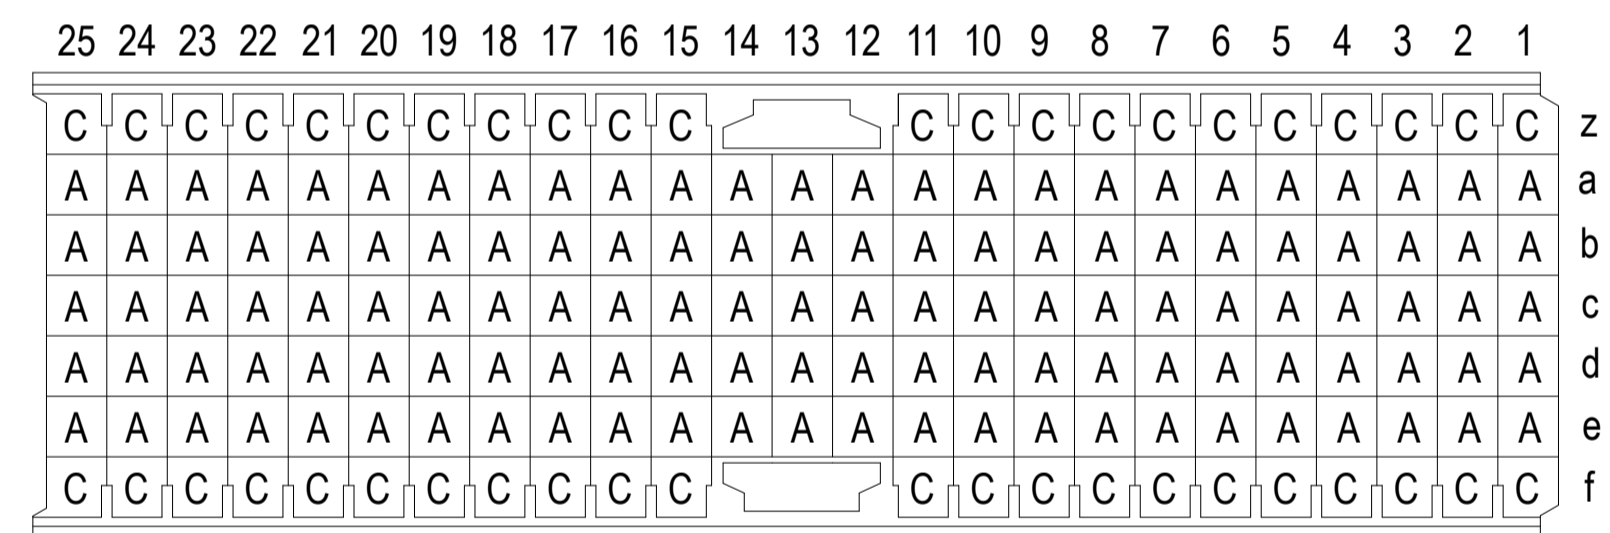

1 MATERIAL:
CONTACT: COPPER ALLOY.
HOUSING: GLASS-FILLED POLYESTER.

2 GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101
PERFORMANCE LEVEL 2.

4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.

2/3	2392188-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN TONY LI 27MAY2021		NAME MALE ASSEMBLY, Z-PACK 2mm HM, 169P TYPE A/B EON	
DIMENSIONS: mm		CHK ALEX XU 27MAY2021		APVD HOPE LU 27MAY2021	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-19082		APPLICATION SPEC 114-160149	
0-PLC ±		SIZE A1		CAGE CODE 00779	
1-PLC ±0.2		DRAWING NO. 2392188		RESTRICTED TO	
2-PLC ±		WEIGHT 0		SCALE 4:1	
3-PLC ±		CUSTOMER DRAWING		SHEET 1 of 1	
4-PLC ±				REV A	
ANGLES ±					
SEE TABLE					