



## VERTICALLY POLARIZED OMNI ANTENNAS OD9

### 860-960 MHZ VERTICALLY POLARIZED OMNI-DIRECTIONAL ANTENNA

The NLOS series omni-directional antenna system offered by Laird are constructed of UV stabilized fi berglass and stainless steel for long service life. Mounting is easy with a dual u-bolt mounting system. The antennas are vertically polarized. The 6dBi and 8dBi come standard with 18" pigtails terminated in an N female connector. The 5dBi and 11dBi comes standard with an integrated N Female connector. The omni's are DC grounded for lightning protection. The 11dBi omni is available with 1 deg electrical downtilt which provides null fi ll and improved close-in coverage.

#### FEATURES

- 900MHz omni-directional antenna
- Available in 5, 6, 8 and 11dBi gain models
- 1 degree electrical downtilt available on the 11dBi model
- UV stabilized fi berglass / stainless steel construction
- 18" pigtail with type N female connector standard (6dBi and 8dBi models only)

#### MARKETS


- 900 MHz ISM band applications
- WISP base station equipment
- Non line-of-sight applications
- Cellular applications

PARAMETER	OD9-5	OD9-6	OD9-8	OD9-11	OD9-11D1
VSWR	1.5:1	1.5:1	1.5:1	1.5:1	1.5:1
Impedance	50 ohm	50 ohm	50 ohm	50 ohm	50 ohm
Input power	100W	100W	100W	100W	100W
Pole diameter (OD)	1"- 2" (25-51mm)	1"- 2" (25-51mm)	1"- 2" (25-51mm)	1"- 2" (25-51mm)	1"- 2" (25-51mm)
Operating temperature	-45 - +70°C	-45 - +70°C	-45 - +70°C	-45 - +70°C	-45 - +70°C
Rated wind velocity	125 mph (56 m/sec)	125 mph (56 m/sec)	125 mph (56 m/sec)	125 mph (56 m/sec)	125 mph (56 m/sec)
Gain	5dBi	6dBi	8dBi	11dBi	11dBi
VSWR 1.5:1 bandwidth	890-950 MHz	865-945 MHz	865-945 MHz	860-960 MHz	860-960 MHz
VSWR 2.0:1 bandwidth		860-960 MHz	860-960 MHz		
Vertical 3dB beamwidth	36°	16°	10°	7°	7°

PARAMETER	OD9-5	OD9-6	OD9-8	OD9-11	OD9-11D1
Electrical downtilt	0	0	0	0	1
Length	24 in (610 mm)	5.6 ft (1.7 m)	8.5 ft (2.6 m)	11 ft (3.4 m)	11 ft°(3.4 m)
Diameter	1.5 in (38 mm)	1.5 in (38 mm)	1.5 in (38 mm)	1.5 in (38 mm)	1.5 in (38 mm)

## SYSTEM ORDERING

OD9-5	5dBi slimline NLOS series 900MHz omni antenna with N female bulkhead connector
OD9-6	6dBi NLOS series 900MHz omni antenna with 18" pigtail / N female connector
OD9-8	8dBi NLOS series 900MHz omni antenna with 18" pigtail / N female connector
OD9-11D1	11dBi 1deg elec downtilt NLOS series 900MHz omni antenna with integrated N female connector

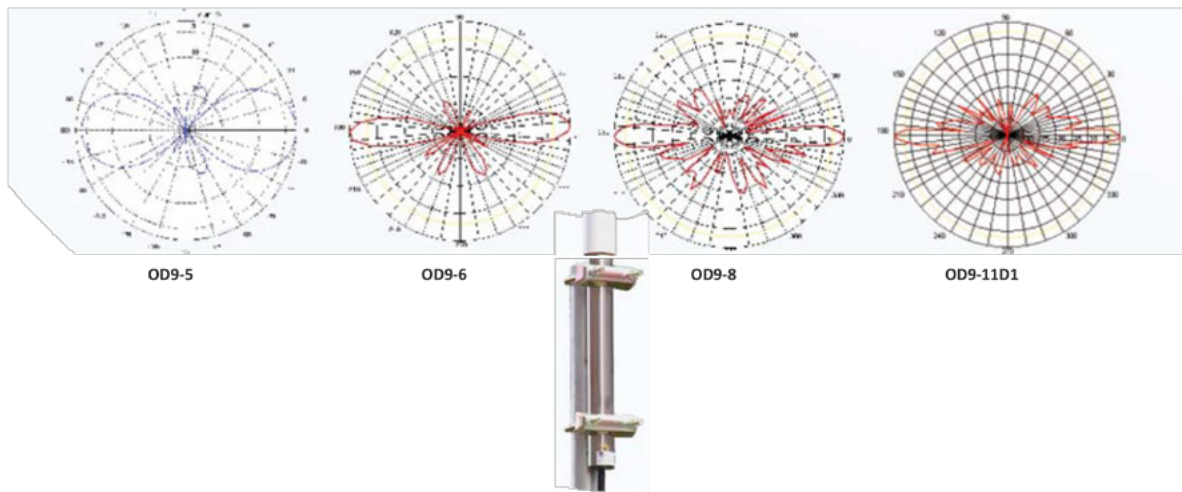

## TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

## te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original