



ARICELL SCL-05

Bobbin Construction Size 2/3 AA

Scope: This data sheet describes the mechanical design and electrical performance of the AriCell SCL-05, 2/3 AA-size, 3.6V, 1.65Ah, Primary Lithium Thionyl chloride (SOCl₂), HIGH ENERGY battery.

Characteristics:

Nominal voltage: 3.6V


Nominal capacity: 1.65 (@ 3.6kΩ / 1mA at 25°C, cut-off voltage 2V)

Maximum recommended continuous current: 40mA

Maximum recommended pulse current: 80mA




Operating temperature range: -55°C to +85°C

Nominal weight: 13g

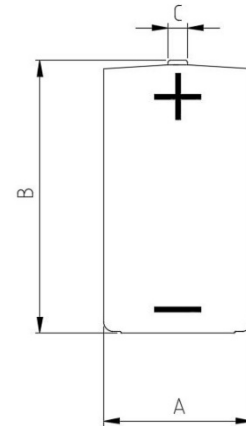

units=mm

	A	B	C
SCL-05	Max.14.5	Max.33.5	Ø 4.3

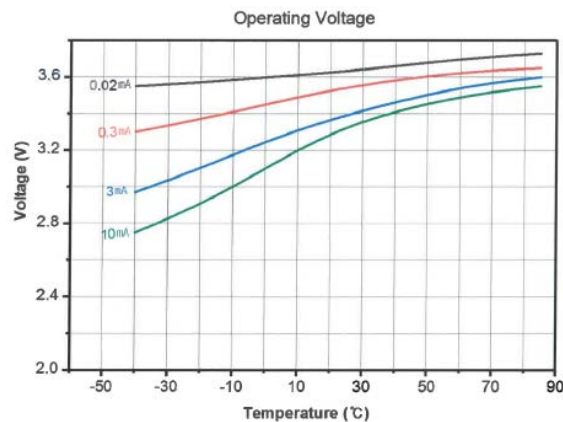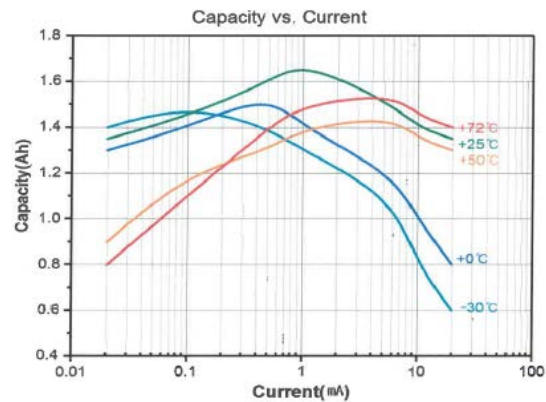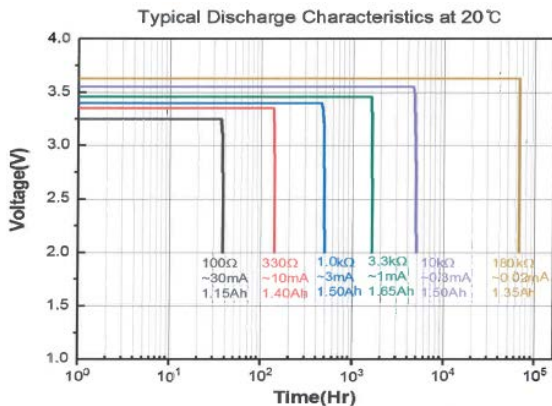

WARNING: Fire, explosion, and severe burn hazards.

- Do not disassemble
- Do not heat above 100°C
- Do not recharge, short circuit, crush, incinerate, or expose contents to water

Manufactured for, and distributed by:
Devon Company
 680 Main Street, Ste. 206 Watertown, CT 06795
 Phone: (860)945-1177 Fax: (860)274-5381
 Email: info@devon-company.com
www.devon-company.com

Made in South Korea