

1

2

3

4



5

A

B

C

D

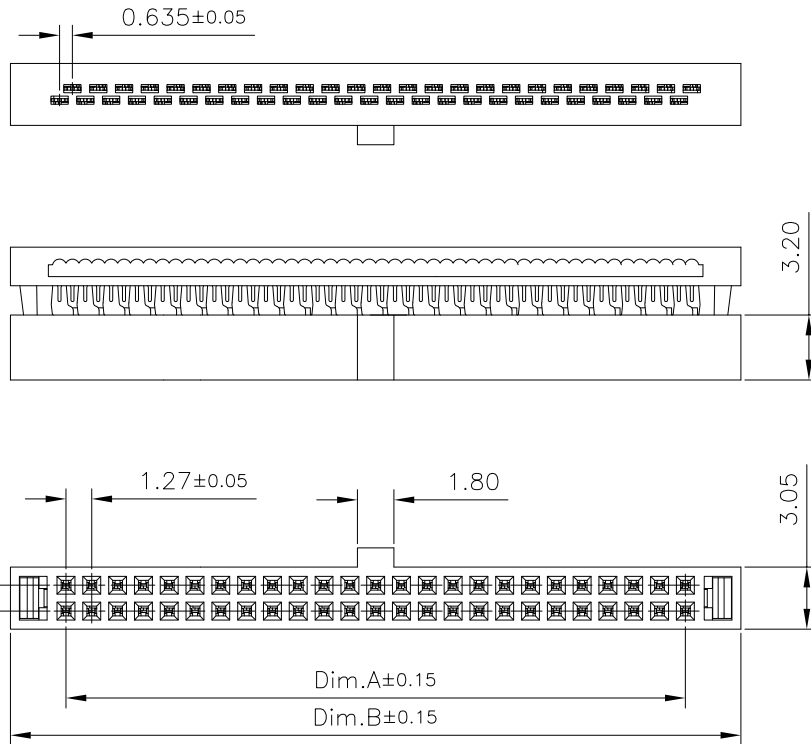

Specifications:

Current rating:1.0A AC,DC  
 Voltage rating:50V AC, DC  
 Contact resistance:20m ohm Max  
 Insulation resistance:1000M ohm Min  
 Withstanding voltage:500V AC/minute  
 Operating Temperature:-40°C ~ +105°C

Materials:

Insulator:PBT UL94V-0  
 Standard Color;Black  
 Terminal:Phosphor Bronze  
 Finish:Gold Plated

Dimension:

Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
6	2.54	8.00	28	16.51	21.97
8	3.81	9.27	30	17.78	23.24
10	5.08	10.54	34	20.32	25.78
12	6.35	11.81	40	24.13	29.59
14	7.62	13.08	44	26.67	32.13
16	8.89	14.35	50	30.48	35.94
18	10.16	15.62			
20	11.43	16.89			
24	13.97	19.43			
26	15.24	20.70			

Mating Part Number		
3220-ALL	3210-XX-001-11-XX	3210-XX-001-12-XX
3210-XX-002-12-XX	3210-XX-003-12-XX	

RoHS Compliant

				DRAWN: Jerry	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<div style="text-align: center;"> <h1 style="color: red;">CnC Tech</h1> <p>Industrial Cable and Connector Technology</p> </div>
				CHECKED:		
				APPROVAL: Rory	SCALE:1:1	PART NO: 3230-XX-0102-00
REV	DATE	FILE	BY		SHEET: 1 / 2	
				PROJECTION:		