


## ALT22A471DD385

Aliases (A663HJ471M385A)

Not for New Design

ALT22, Aluminum Electrolytic, 470 uF, 20%, 385 VDC, -40/+85°C

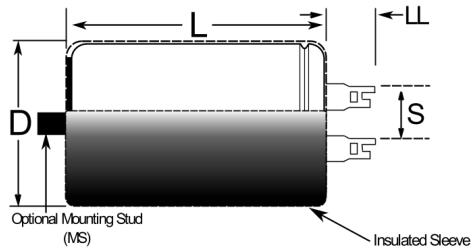

### General Information

Series	ALT22
Dielectric	Aluminum Electrolytic
Description	Solder Tag, Aluminum Electrolytic
Features	Solder Tag
RoHS	Yes
Lead	2 Flying Leads Solder Tags
AEC-Q200	No
Component Weight	95 g
Notes	Dimensions D And L Include Sleevings.

### Specifications

Capacitance	470 uF
Capacitance Tolerance	20%
Voltage DC	385 VDC, 423.5 VDC (Surge)
Temperature Range	-40/+85°C
Rated Temperature	85°C
Life	26000 Hrs
Leakage Current	1086 uA (5min 20°C)

Click [here](#) for the 3D model.

### Dimensions

D	40mm +/-1mm
L	55mm +/-2mm
S	10mm +/-0.1mm
LL	10mm +/-0.5mm

### Packaging Specifications

Sleevings	Yes
Packaging	Bulk, Bag