


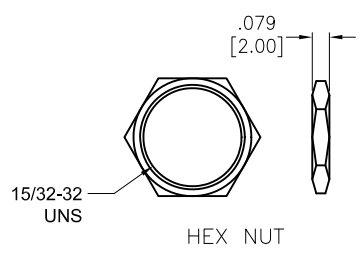
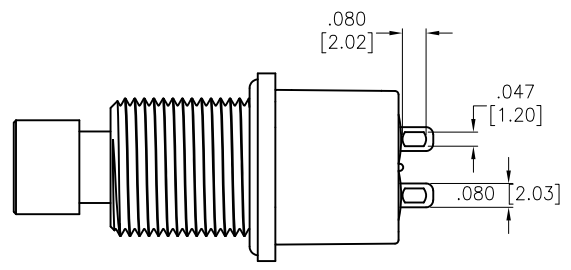

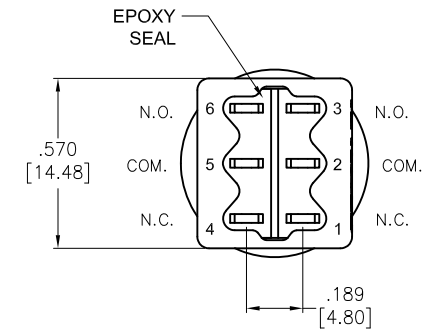
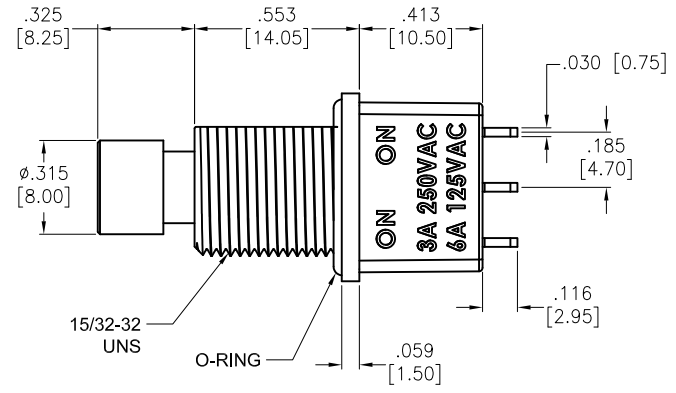


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/26/21	

APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

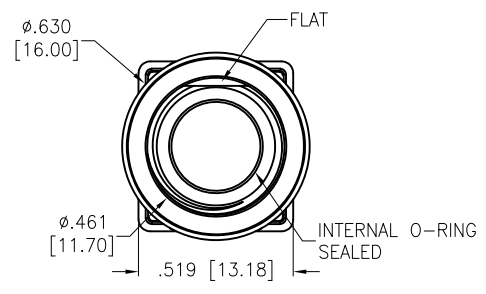

BUTTON POSITION		
FUNCTION	ON	ON
TERMINALS	2-3, 5-6	2-1, 5-4

**SPECIFICATIONS:**  
Material:  
Case: DAP, Rated UL94V-0  
Plunger: Brass, color Black w/ O-Ring  
Bushing: Brass, color Black w/ O-Ring  
Movable Contact: Copper Alloy, Silver Plated  
Terminal: Copper Alloy, Silver Plated  
Electrical:  
Rating: 6A @ 125VAC or 28V DC  
3A @ 250VAC  
Contact resistance: 10 mΩ max  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 1,500V RMS @Sea level  
Life: 50,000 cycles at full load  
Temperature Rating:  
Operating temperature: -30°C to +85°C  
Environmental:  
Sealed IP68 Rated  
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED

.X	± .10	∅X	± .10
.XX	± .020	∅XX	± .015
.XXX	± .015	∅XXX	± .010

APPROVALS		DATE
DRAWN	LH	1/26/21
CHECKED	AC	1/26/21
APPROVED		

**ADAM TECH** 909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE: HIGH PERFORMANCE PUSH BUTTON SWITCH,  
DPDT, ON-ON, SILVER PLATED, SOLDER TYPE

SIZE	PART NO.	REV.
X	SW-PB10-BAA1QE-4	-

REF: S00198T SCALE: NTS SHEET 1 OF 1