
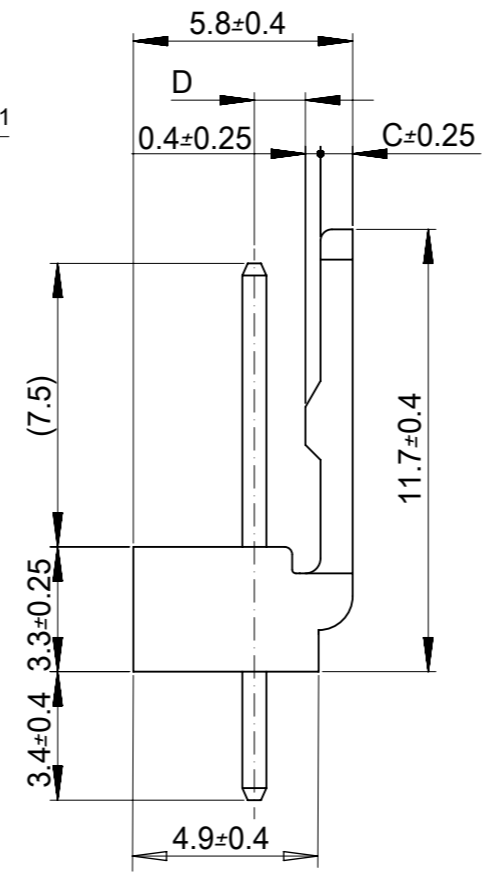


注：  
NOTE

1. 材料 MATERIAL  
ピン : □0.635×14.2 黄銅、  
ニッケル下地金めっき  
PIN : □0.635×14.2 BRASS  
GOLD OVER NICKEL PLATING  
ウエハー : ポリアミド、UL94V-0  
WAFER: POLYAMIDE,UL94V-0
2. 6極以上に適応  
TO BE APPLIED FOR 6 CKT.AND MORE THAN 6 CKT.
3. 5極以下はロック部スリットなし  
NO SLIT IS PROVIDED FOR 5 CKT.AND LESS THAN 5 CKT.
4. ELV 及び RoHS 適合品  
ELV AND RoHS COMPLIANT

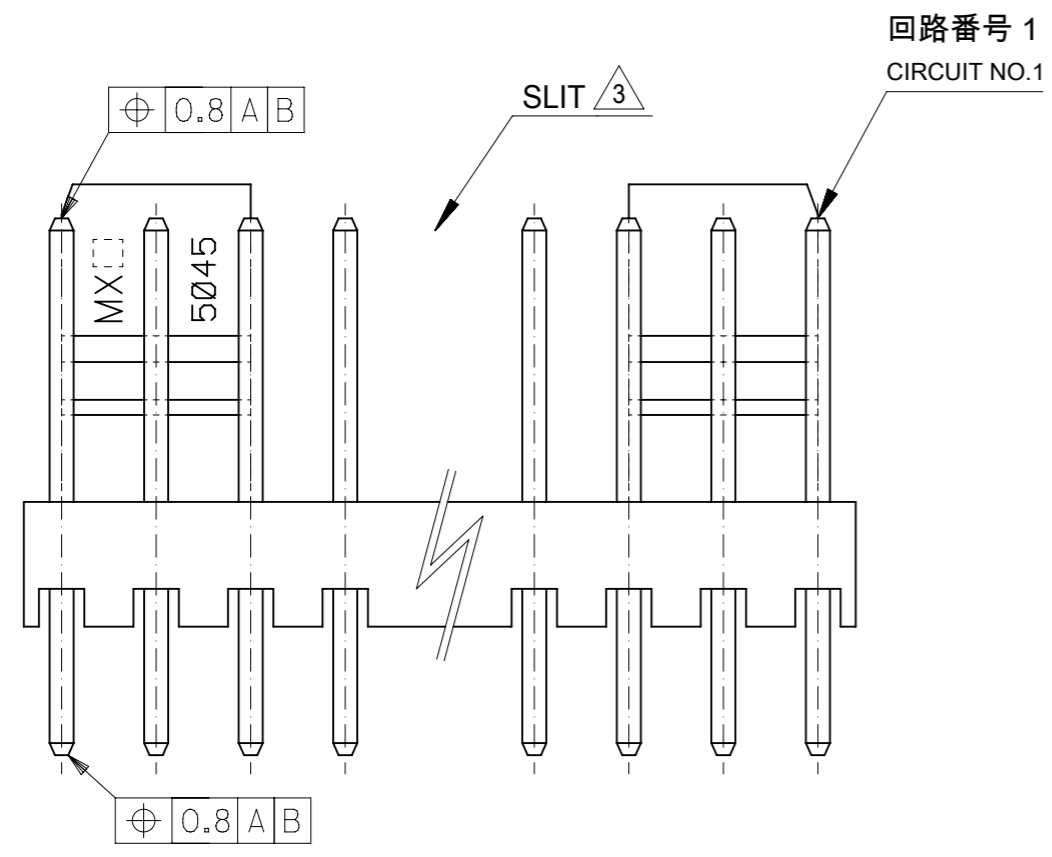

1.35	0.85	35	<sup>+0.3</sup> / <sub>-0.45</sub>	35	22 11 1151	15
↑	↑	32.5	<sup>+0.25</sup> / <sub>-0.45</sub>	32.5	↑ 1141	14
		30	<sup>+0.25</sup> / <sub>-0.4</sub>	30	↑ 1131	13
		27.5	<sup>+0.25</sup> / <sub>-0.4</sub>	27.5	↑ 1121	12
		25	<sup>+0.2</sup> / <sub>-0.4</sub>	25	↑ 1111	11
		22.5	<sup>+0.2</sup> / <sub>-0.4</sub>	22.5	↑ 1101	10
		20	<sup>+0.15</sup> / <sub>-0.35</sub>	20	↑ 1091	9
		17.5	<sup>+0.15</sup> / <sub>-0.35</sub>	17.5	↑ 1081	8
		15	<sup>+0.1</sup> / <sub>-0.3</sub>	15	↑ 1071	7
		12.5	<sup>+0.1</sup> / <sub>-0.3</sub>	12.5	↑ 1061	6
↓	↓	10	<sup>+0.15</sup> / <sub>-0.3</sub>	10	↑ 1051	5
1.35	0.85	7.5	<sup>+0.15</sup> / <sub>-0.3</sub>	7.5	↑ 1041	4
1.2	1	5	<sup>+0.15</sup> / <sub>-0.3</sub>	5	↓ 1031	3
1.2	1	2.5	<sup>+0.15</sup> / <sub>-0.3</sub>	2.5	22 11 1021	2
D	C	B	A	ORDER No.	極数	CKT.

MODEL No. : 5045-\*\*AG

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 168849 DRWN: QHE31 CHK'D: SAKIYAMA APPR: TKANEKO	2017/11/28	2017/11/30	2017/12/26	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0 ° 4 PLACES ± 0.2 3 PLACES ± 0.2 2 PLACES ± 0.2 1 PLACE ± 0.2 0 PLACES ± 0.2 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION UNITS	SCALE	
	REVISED	mm	5:1				
	DRHN BY	DATE	RHORI 2013/11/25				
	CHK'D BY	DATE	KASAKAWA 2013/11/28				
	APPR BY	DATE	NUKITA 2013/11/28				
DRAWING SIZE	THIRD ANGLE PROJECTION	A3	SERIES: 5045 MATERIAL NUMBER: SEE CHART CUSTOMER: GENERAL MARKET				
DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER	SD-5045-001 PSD 001 1 OF 1		