



Electrical specifications

Center Frequency: 3000 MHz
Bandwidth: 200 MHz min
VSWR: 1.5 : 1 max
Input / Output Impedance: 50 Ohms
Passband: 2900-3100 MHz
Passband Insertion Loss: 2.5 dB max
Passband Ripple: 1.0 dB max
Rejection: 60 dB min @ 2400 MHz
Rejection 2: 60 dB min @ 3600 MHz
Power Handling: 23 dBm max

Mechanical


Mounting Method: SMT
Dimensions: .72" x .55" x .19"
 (18.29 x 13.97 x 4.83 mm)

Environmental

Operating Temperature: -30°C to +70°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

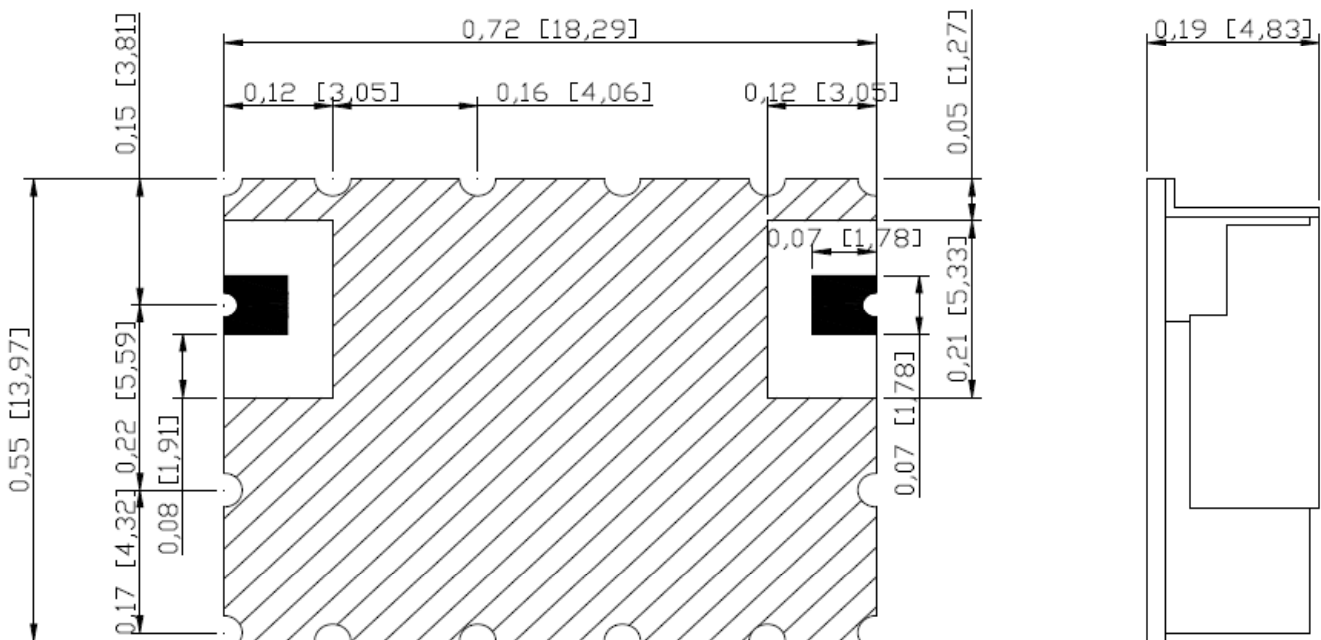

IN/OUT PORT

GROUND

UNIT : Inch - [mm]



Response Plot:

