

91330-0026	26	(36.80)/1.449	(31.75)/1.25	(37.33)/1.470
91330-0024	24	(34.26)/1.349	(29.21)/1.15	(34.81)/1.370
91330-0022	22	(31.72)/1.249	(26.67)/1.05	(32.27)/1.270
91330-0020	20	(29.18)/1.149	(24.13)/.95	(29.73)/1.170
91330-0018	18	(26.64)/1.049	(21.59)/.85	(27.19)/1.070
91330-0016	16	(24.10)/.949	(19.05)/.75	(24.65)/.970
91330-0014	14	(21.56)/.849	(16.51)/.65	(22.11)/.870
91330-0012	12	(19.02)/.749	(13.97)/.55	(19.57)/.770
91330-0010	10	(16.48)/.649	(11.43)/.45	(17.03)/.670
91330-0008	8	(13.94)/.549	(8.89)/.35	(14.49)/.570
91330-0006	6	(11.40)/.449	(6.35)/.25	(11.95)/.470
PART No.	CCT	DIM. A	DIM. B	DIM. C (+0.25) ±.010

NOTES:

1. MATERIALS:


HOUSING: POLYAMIDE 46, 30% GLASS FILL, NATURAL, UL94 V-0

TERMINAL: BRASS [0.28]/.011 REF. THICK

KAPTON TAPE: POLYAMIDE [0.08]/.003 REF. THICK

2. PLATING: TIN

3. PACKAGING: TAPE AND REEL PER PK-91330-003

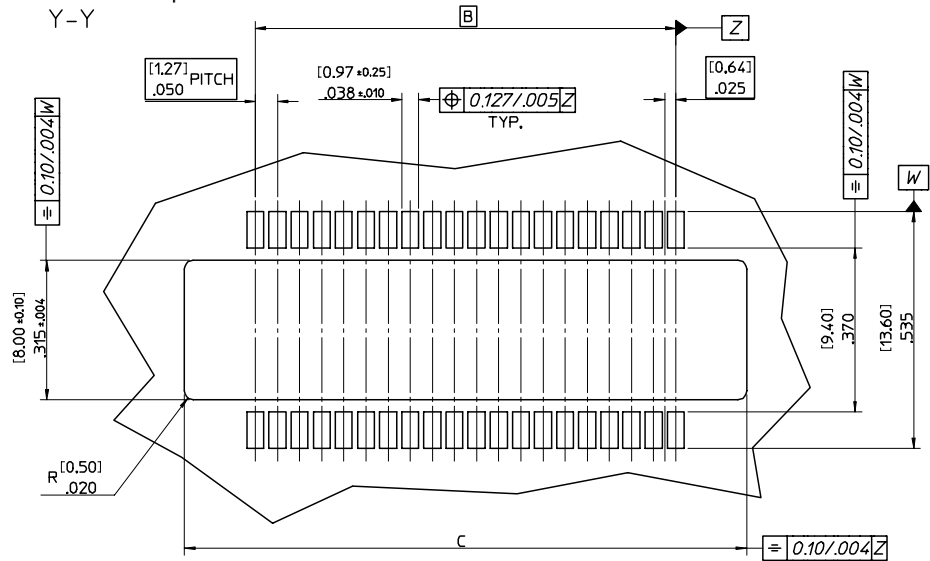

RECOMMENDED PCB LAYOUT  
THICKNESS=[1.57±0.13]/.062±.005

ADD CKT OPTION EC NO: E2005-1005 DRWN: GMC/SWE/005/05/24 CHKD: DM/RIART/005/05/24 APPR: JOENNEH/2005/05/27	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY	
	DESCRIPTION -0 C=0	mm INCH	DIMENSION STYLE IN/MM		TITLE		
		4 PLACES ± --- ± ---	3 PLACES ± --- ± .004	DRAWN BY MOR	DATE 98/07/08	PICOFLEX SMT HEADER THROUGH BOARD	
		2 PLACES ± 0.10 ± ---	1 PLACE ± --- ± ---	CHECKED BY MOR	DATE 98/07/08	MOLEX INCORPORATED	
REV	ANGULAR ± 2 °	DRAFT WHERE APPLICABLE	APPROVED BY JHORGAN	DATE 98/07/08	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-91330-001	
	MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1 OF 1	A2	