


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	TLY-13	NEMA 5-15P	1	black overmold
2	TLY-18L	C13, 90°	1	black overmold
3	30-00244	Wire, 3C, 18 AWG, UL SVT, 300V, 105°C, 6.3 mm, VW-1, PVC	1	

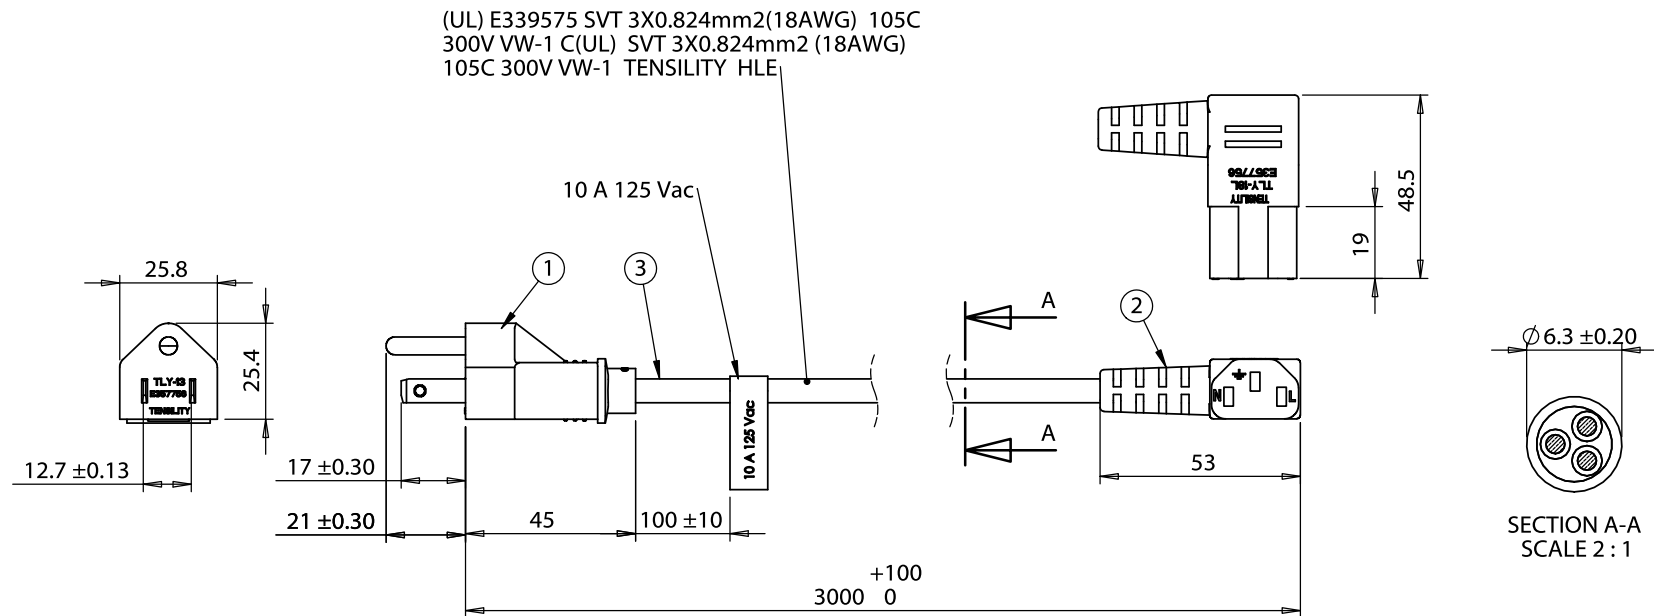

Revision	Date	Description	Prepared by:	Notes:	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130  Bend, OR 97701 USA  tel 541.323.3228 fax 541.323.4202  800 877.670.7118 www.tensility.com</p>		
A	8/27/2014	Initial release	AG 2014.08.27 15:12:50 -07'00'	Rated for 10 A at 125 Vac  RoHS compliant  Function test: no open, no reversed polarity, no short circuit, no INT			
			Verified by: JM 2014.08.28 09:35:25 -07'00'		SCALE: 1:2	WEIGHT:	SHEET 1 OF 1
			DIMENSIONS ARE IN MILLIMETERS  TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Ac cord, 3000 mm, U.S, NEMA 5-15P plug, TLY-13 to 90° C13, TLY-18L, 18 AWG, SVT wire, 30-00244			