

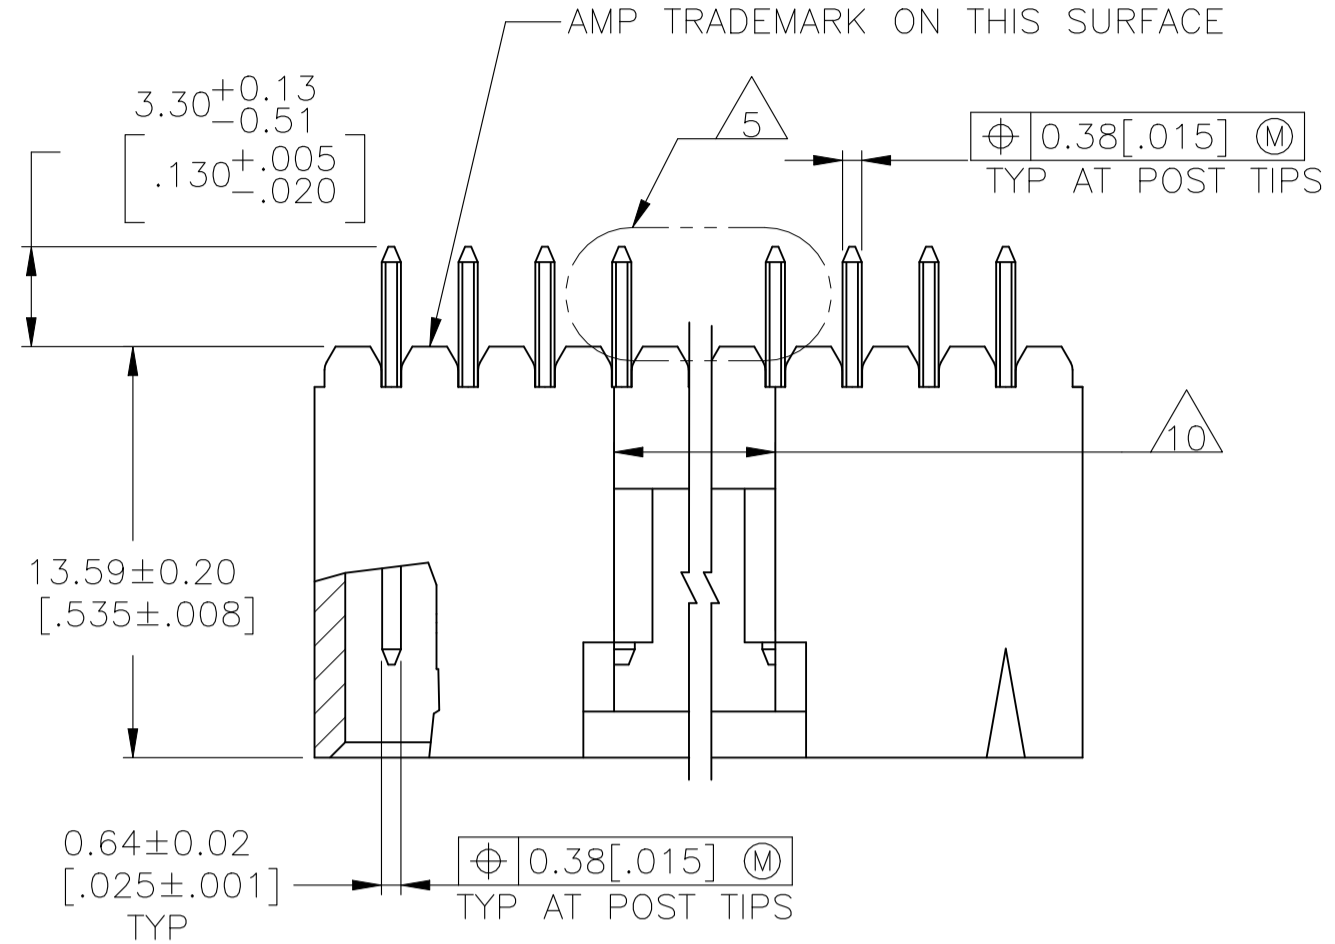


REVISIONS					
REV	DATE	BY	APP'D	DESCRIPTION	REVISED PER
H	05JUN2020	SB	JO		ECO-20-00132

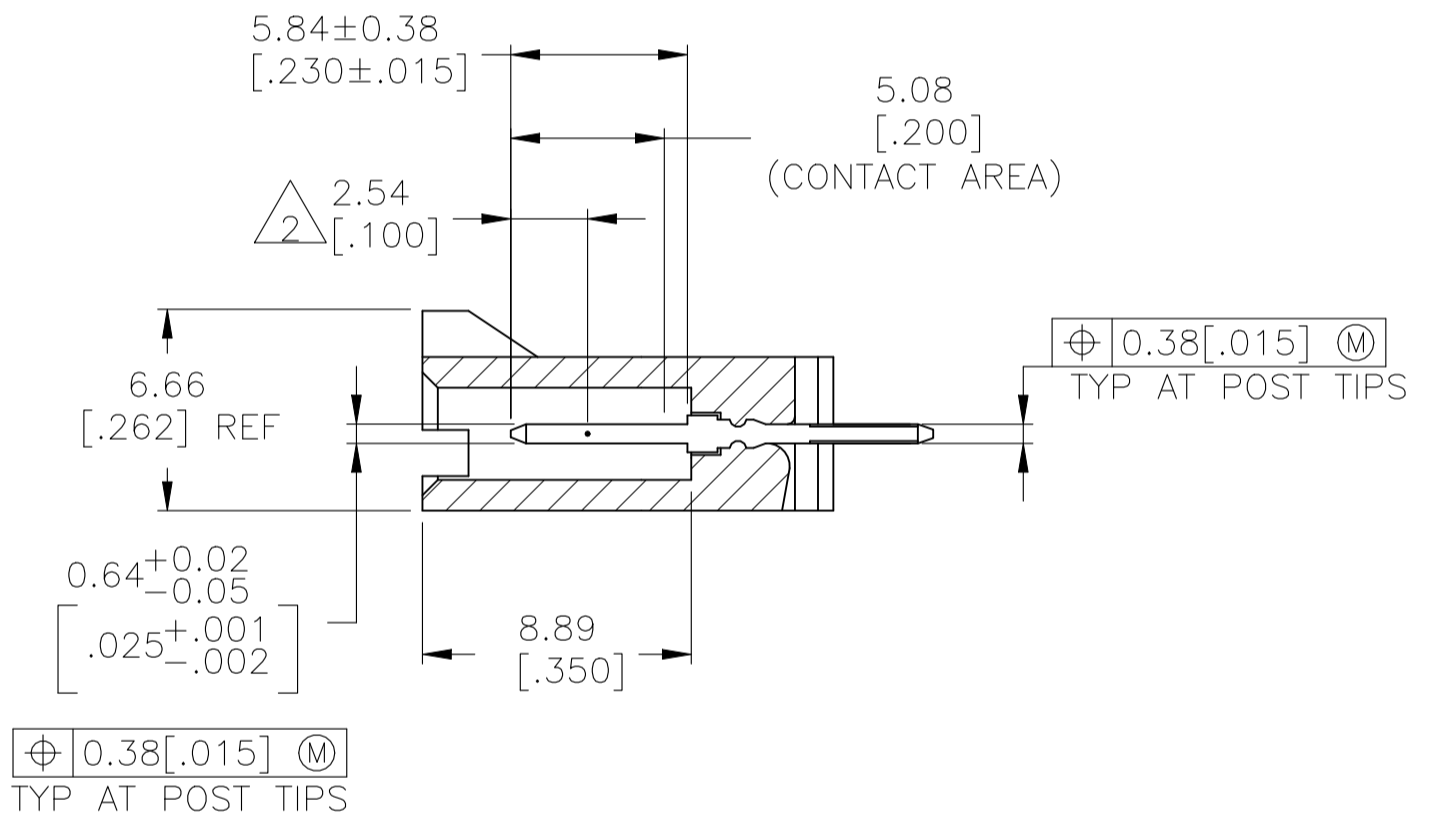


DETAIL Z  
POST DETAIL TYP  
2 POST MINIMUM

- 1 0.00038[.000015] GOLD IN THE CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL
- 2 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 3 THE NOTED DIMENSIONS APPLY FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED
- 4 ONE POLARIZATION SLOT FOR 2 POSITION ASSEMBLY ONLY.
- 5 HOLD DOWN UNTIL SOLDERED, CONFIGURATION ACCEPTS 0.69-2.03[.027-.080] THICK PRINTED CIRCUIT BOARD (SEE DETAIL Z)
- 6 DIMENSIONS NOTED ARE FOR SOLDER STENCIL LAYOUT FOR USE WITH 1.57±0.20[.062±.008] THICK PRINTED CIRCUIT BOARDS.
- 7 PARTS ARE PACKAGED IN GANG OF TUBES
- 8 0.00038[.000015] GOLD IN THE CONTACT AREA, 0.00254-0.00508[.000100-.000200] MATTE TIN ON THE SOLDER TAIL, ALL OVER 0.00127[.000050] NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 10 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

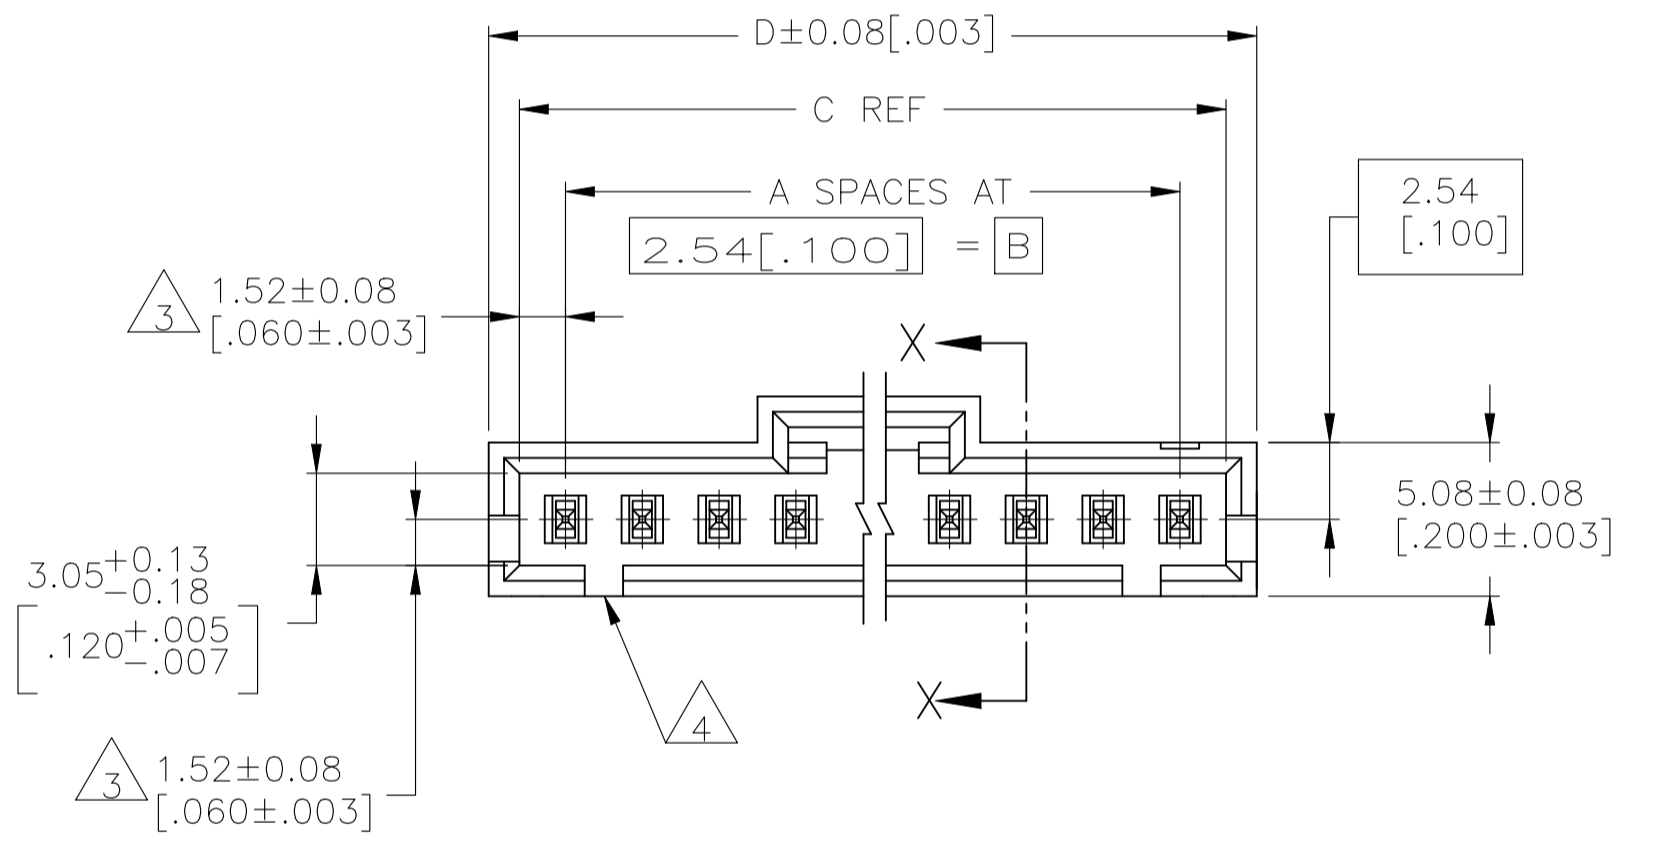

SECTION X-X

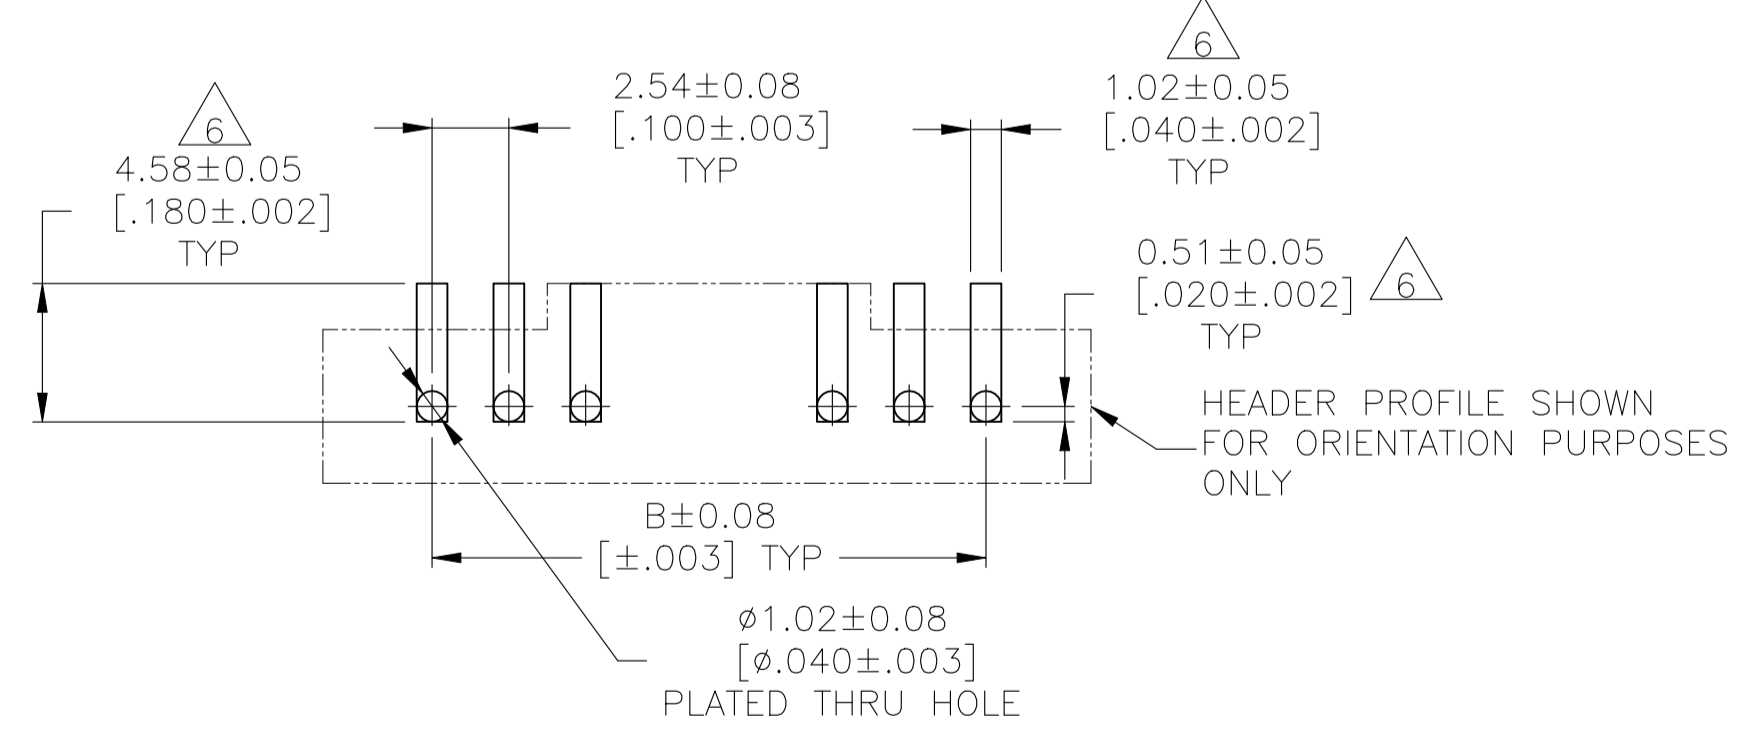

RECOMMENDED PC BOARD MOUNTING DIMENSIONS  
RECOMMENDED STENCIL THICKNESS = 0.25[.010]

REV	DATE	BY	APP'D	DESCRIPTION	REVISED PER	PLATING	D	C	B	A	NO. OF POSN	PART NUMBER
8	65.91	64.01	60.96	24	25	7-104909-4						
8	63.37	61.47	58.42	23	24	7-104909-3						
8	60.83	58.93	55.88	22	23	7-104909-2						
8	58.29	56.39	53.34	21	22	7-104909-1						
8	55.75	53.85	50.80	20	21	7-104909-0						
8	53.21	51.31	48.26	19	20	6-104909-9						
8	50.67	48.77	45.72	18	19	6-104909-8						
8	48.13	46.23	43.18	17	18	6-104909-7						
8	45.59	43.69	40.64	16	17	6-104909-6						
8	43.05	41.15	38.1	15	16	6-104909-5						
8	40.51	38.61	35.56	14	15	6-104909-4						
8	37.97	36.07	33.02	13	14	6-104909-3						
8	35.43	33.53	30.48	12	13	6-104909-2						
9	65.91	64.01	60.96	24	25	2-104909-4	SUPERCEDED					
9	63.37	61.47	58.42	23	24	2-104909-3	SUPERCEDED					
9	60.83	58.93	55.88	22	23	2-104909-2	OBSOLETE					
9	58.29	56.39	53.34	21	22	2-104909-1	SUPERCEDED					
9	55.75	53.85	50.80	20	21	2-104909-0	SUPERCEDED					
9	53.21	51.31	48.26	19	20	1-104909-9	SUPERCEDED					
9	50.67	48.77	45.72	18	19	1-104909-8	SUPERCEDED					
9	48.13	46.23	43.18	17	18	1-104909-7	SUPERCEDED					
9	45.59	43.69	40.64	16	17	1-104909-6	SUPERCEDED					
9	43.05	41.15	38.1	15	16	1-104909-5	SUPERCEDED					
9	40.51	38.61	35.56	14	15	1-104909-4	SUPERCEDED					
9	37.97	36.07	33.02	13	14	1-104909-3	SUPERCEDED					
9	35.43	33.53	30.48	12	13	1-104909-2	SUPERCEDED					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN E. BRANDBERG  
C/K: J. GESFORD  
APPRO: D. DUPLER

TE Connectivity

NAME: HEADER ASSY, AMPMODU MTE, VERTICAL SINGLE ROW, 2.54[.100] C/L, 0.64[.025] SQ POSTS, POLARIZED, WITH LATCHING & HOLD DOWN, HIGH TEMP

SIZE: A1  
CAGE CODE: 00779  
DRAWING NO: 104909

SCALE: 4:1  
SHEET: 1 of 1  
REV: H