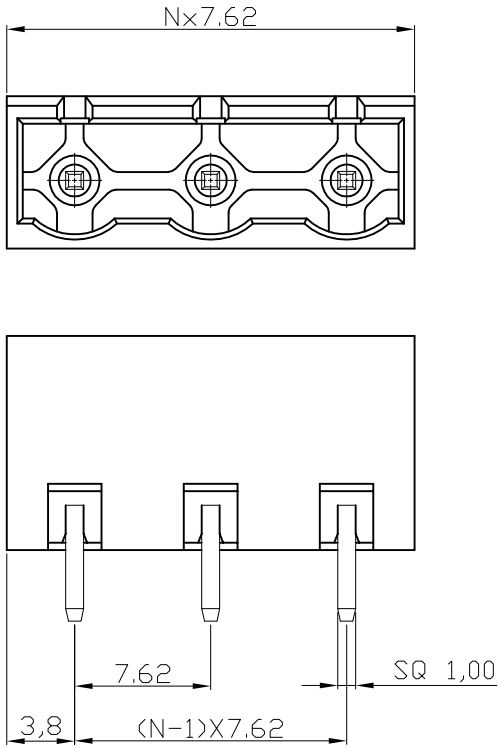

N=Number of contacts

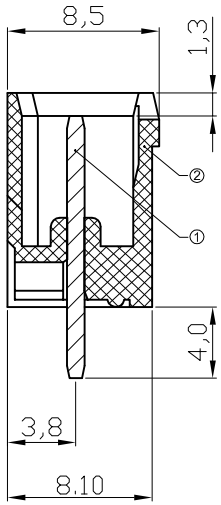

NOTES:

MATERIAL
1.Item ② Contact pin: Brass(CuZn)Tin plated
2.Item ① Insulator (housing):Thermoplastic (UL 94V-0),green
ELECTRICAL
1.Current Rating : 20A
2.Voltage Rating : 300V
3.Withstand Voltage : 1.6KV
ENVIRONMENTAL
1.Soldering Temperature: 250°C ±10°C/5 Sec
2.Operating Temperature: -40°C to +115°C
3.Safety approval: c us

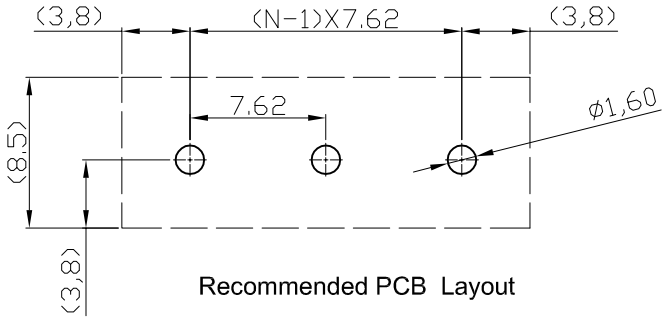

Recommended PCB Layout

RoHS compliant

② File No.: E349947

Scale	1:1					Date	Name	Customer-No.
TOLERANCE					Drawn	19.03.2009	Dean	
X.	±0.50				Approved	19.04.2016	Winnie	ASSMANN WSW-No. A-TB762-OQXXCV
X.X	±0.30							
X.XX	±0.10							
DIM	TOL	②	Drawn	19.04.2016	Winnie			Drawing-No. ASS 3419 CO rev02
X.°	±1°	①	Drawn	19.03.2009	Dean			
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			Replace Sheet

ASSMANN WSW components

SV1387