


| LTR | REV. | DESCRIPTION | DATE |
|-----|------|----------------------------------|----------|
| ⚠ | E | ECN # 021007-3 CHANGE PACKING | 10/07/02 |

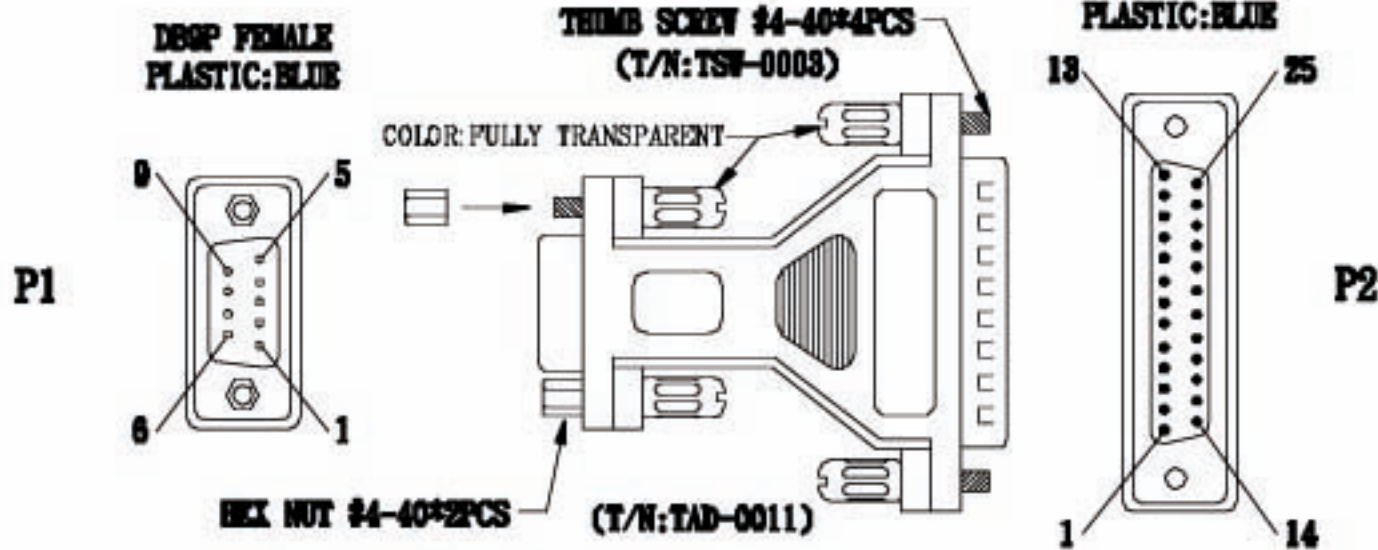


WIRING LIST

| P1 | P2 |
|-------|-------|
| 1 | 8 |
| 2 | 3 |
| 3 | 2 |
| 4 | 20 |
| 5 | 7 |
| 6 | 6 |
| 7 | 4 |
| 8 | 5 |
| 9 | 22 |
| SHELL | SHELL |

NOTE (FOR DB9F/DB25M ADAPTOR):

1. HOOK UP WIRE: 28AWG(7/0, 127) TINNED COPPER
2. CONNECTOR:
 - P1: DB9F FEMALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
 - P2: DB25P MALE GOLD FLASH CONTACT, NICKEL PLATED SHELL
3. P1&P2: INNER MOLDED MUST BE WRAPPED ALUMINUM
4. HOOD: MOLDED TYPE PVC 45P COLOR: DARK GRAY TRANSPARENT(NK-K02)
5. TEST REQUEST:
 - ①. 100% OPEN SHORT & HIS WIRE TEST
 - ②. CONTACT RESISTANCE 3Ω MAX
 - ③. INSULATION RESISTANCE 20MΩ MIN
6. PACKING: (EACH ADAPTOR/POLYBAG+USB TO SERIAL CABLE +1PC DRIVER DISK) / BLISTER (BLISTER CARD WITH DIGITUS ARTWORK PROVIDED BY CUSTOMER) + EAN CODE:4016032117940

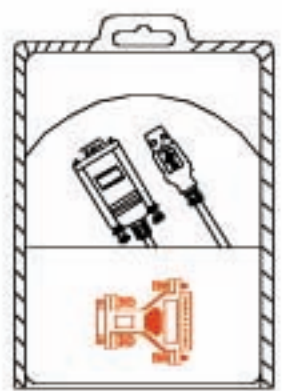

| Tolerance | Inch | M/M |
|-----------|------|-----|
| X | .175 | .01 |
| XX | .118 | .01 |
| XXX | .105 | .01 |

Draw
KIKI 10/07

Chck

Engr

ASSMANN Electronics

Title
USB TO SERIAL CABLE WITH DB9F/DB25M ADAPTOR

Customer P/N **AB914**

App'd _____ Customer: **E-S&H**

Scale NONE Units m/m Third Angle Projection

Dwg No. **170-0000** REV: E Sheet **2/2**