


Extended length is with 500g of force

Note for plug:

- Material:**
 Housing-Polycarbonate,clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area,Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate.
- ① Conductor: [26AWG(0.12x12) BARE COPPER]x6C.
 - ① Insulation: (PP6331 ID:0.95-1.0)x6C.
 - ① Jacket: PVC NOUL 80P.
 - ① Package: Individual PE Bag.

SEC: A-A

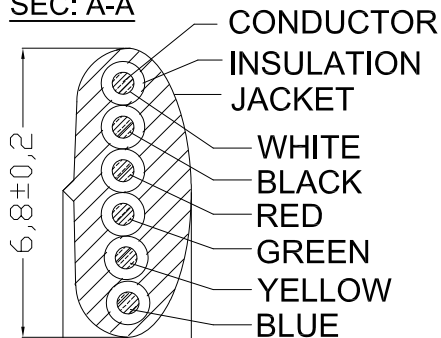

TERMINATION

P1		P2
1	White	6
2	Black	5
3	Red	4
4	Green	3
5	Yellow	2
6	Blue	1

Order code: AT-C-26-6/6/X-XX

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Retracted Length(L3)	Extended Length(L2)	Cut Length(L1)
5	540±50	5.0FT-5.75FT	2600-2700
7	740±50	7.0FT-8.05FT	3700-3900
10	1000±50	10.0FT-11.5FT	5000-5200
12	1300±50	12.0FT-13.8FT	6400-6600
14	1350±50	14.0FT-16.1FT	6900-7100
25	3400±50	25.0FT-28.75FT	13200-13400

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE					Drawn	18.12.2017	Amy	ASSMANN WSW-No. AT-C-26-6/6/X-XX
.x	±0.50				Approved	08.05.2019	Amy	
.xx	±0.20							Drawing-No.
DIM	TOL	① Update the notes, and add the cut length	08.05.2019	Segal	ASSMANN WSW components		ASS 8162 CA	rev01
		② Drawn	18.12.2017	Amy			Replace	
Angle	±2°	Id.	Modification	Date	Name			

1

2

3

4

5

6

7