

## Han Shielded power module female

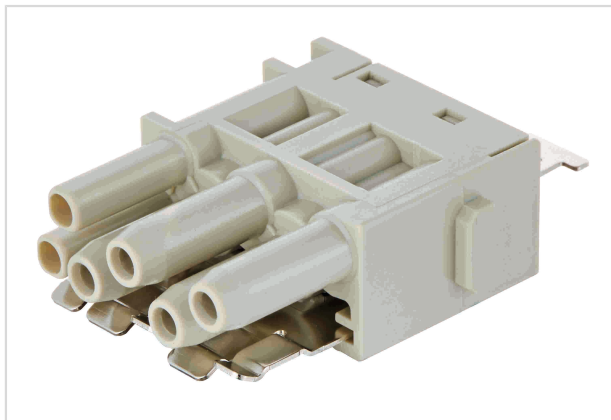


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 006 3121
Specification	Han Shielded power module female
HARTING eCatalogue	<a href="https://b2b.harting.com/09140063121">https://b2b.harting.com/09140063121</a>

### Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® Shielded power module
Description of the module	With shielding plate

### Version

Termination method	Crimp termination
Gender	Female
Number of contacts	4
further contacts	+ 2 additional signal contacts + shielding
Details	Please order crimp contacts separately. 4x Han E® 2x Han D®

### Technical characteristics

Conductor cross-section	0.14 ... 4 mm <sup>2</sup>
Rated current	16 A
Rated voltage	400 V
Rated impulse voltage	4 kV
Pollution degree	3
Rated current (signal)	10 A
Rated voltage (signal)	400 V



Pushing Performance

## Technical characteristics

Rated impulse voltage (signal)	4 kV
Pollution degree (signal)	3
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	$\geq 500$

## Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0

## Specifications and approvals

Specifications	EN 60664-1 IEC 61984
----------------	-------------------------

## Commercial data

Packaging size	2
Net weight	15 g
Country of origin	Germany
European customs tariff number	85366990
eCl@ss	27440217 Module for industrial connectors (power/signals)