

Electronic housing - HCS-C MINI C C C C 7035 - 2203146

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Handheld housing, C-Mini, light gray, front level closed, consisting of two half shells with screws

Your advantages

- ✔ Item is from the HCS product range
- ✔ Suitable for handheld devices
- ✔ Ergonomic straight or staggered housing design
- ✔ Integration of LCD displays and membrane keypads
- ✔ Degree of protection: up to IP54
- ✔ Temperature range: -20 °C to +50 °C
- ✔ Shock-resistant ABS plastic
- ✔ Flammability rating UL 94-V0



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 055626 377001 |
| GTIN | 4055626377001 |

Technical data

Item properties

| | |
|---------------------|-------------------------|
| Type | HCS-C MINI C C C C 7035 |
| Order No. | 2203146 |
| Housing type | Handheld housing |
| Type | straight |
| Battery compartment | no |

Measurements

| | |
|---------|---|
| Caption | Schematic representation – for additional information, see product range drawing in the Download Center |
|---------|---|

Electronic housing - HCS-C MINI C C C C 7035 - 2203146

Technical data

Measurements

| | |
|--------------|---------|
| Width [w] | 70.5 mm |
| Height [h] | 110 mm |
| Depth [d] | 26 mm |

Material specifications

| | |
|--|-------------------|
| Color (RAL) | light gray (7035) |
| Flammability rating according to UL 94 | V0 |
| Housing material | ABS |

Hammer test

| | |
|-----------------------|------------------------|
| Specification | IEC 60068-2-75:2014-09 |
| Impact energy | 0.7 J |
| Number of drop cycles | 5 |

Thermostability (ball thrust test)

| | |
|---------------|------------------------|
| Specification | IEC 60695-10-2:2014-02 |
| Temperature | 80 °C |
| Test duration | 1 h |
| Force | 20 |

Test for assessing the risk of fire (glow wire)

| | |
|------------------|------------------------|
| Specification | IEC 60695-2-11:2014-02 |
| Temperature | 850 °C |
| Time of exposure | 30 s |

Degrees of protection provided by enclosures (IP code)

| | |
|---------------------------------------|---|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Result, degree of protection, IP code | IP65 |

Packaging information

| | |
|----------------------------|------|
| Pieces per package | 1 |
| Denomination packing units | Pcs. |


Standards and regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V0 |
|--|----|

Drawings

Electronic housing - HCS-C MINI C C C C 7035 - 2203146

Dimensional drawing

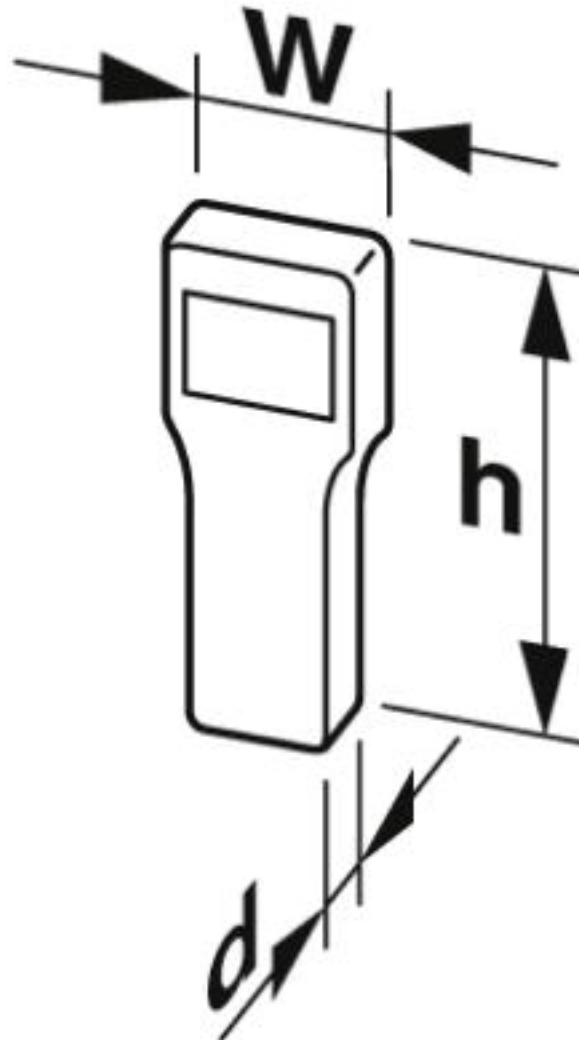

Schematic representation – for additional information, see product range drawing in the Download Center

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>