

注：  
NOTE

1. 材料

MATERIAL

ピン：□0.635×14.2 黄銅、

ニッケル下地金めっき

PIN：□0.635×14.2 BRASS

GOLD OVER NICKEL PLATING

ウエハー：ポリアミド、UL94V-0

WAFER: POLYAMIDE, UL94V-0

2. 6極以上に適応



TO BE APPLIED FOR 6 CKT. AND MORE THAN 6 CKT.

3. 5極以下はロック部スリットなし



NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

4. ELV 及び RoHS 適合品

ELV AND RoHS COMPLIANT

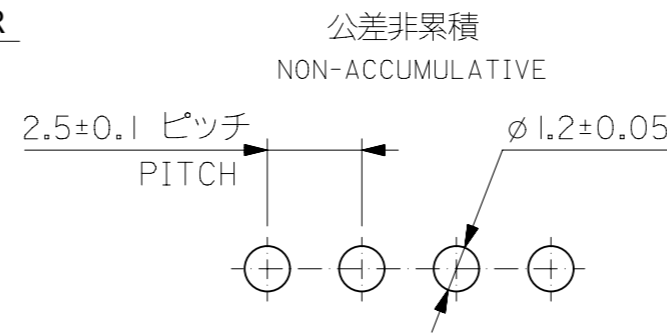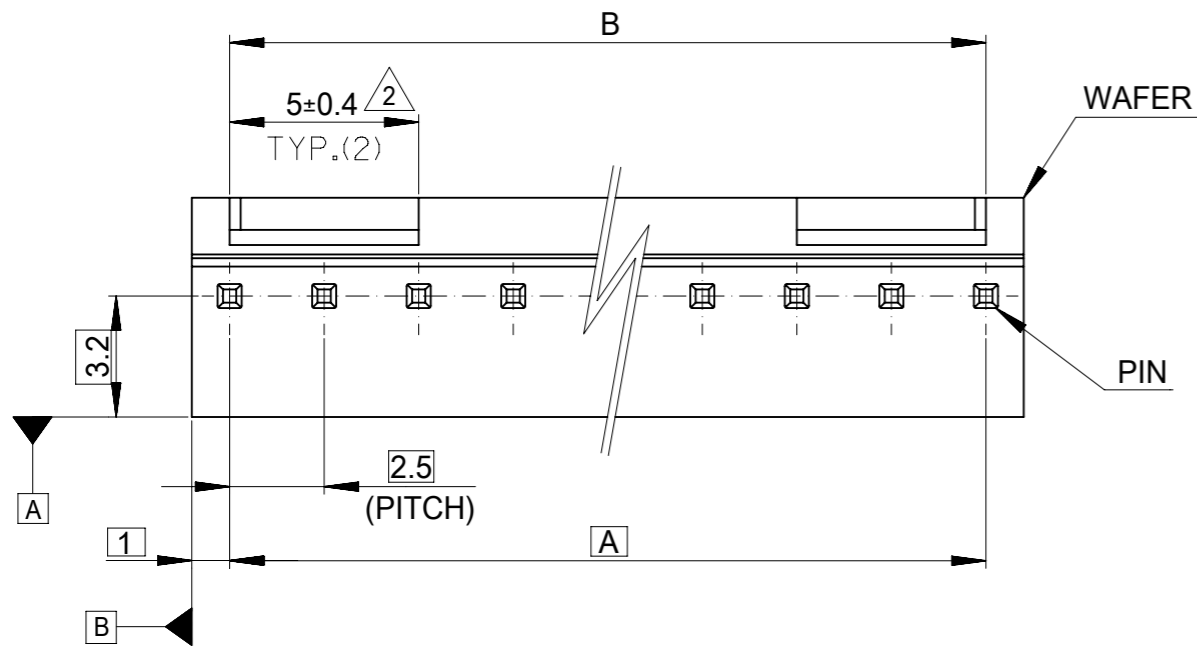

基板取付穴推奨寸法  
RECOMMENDED P.C.BOARD HOLE DIM.

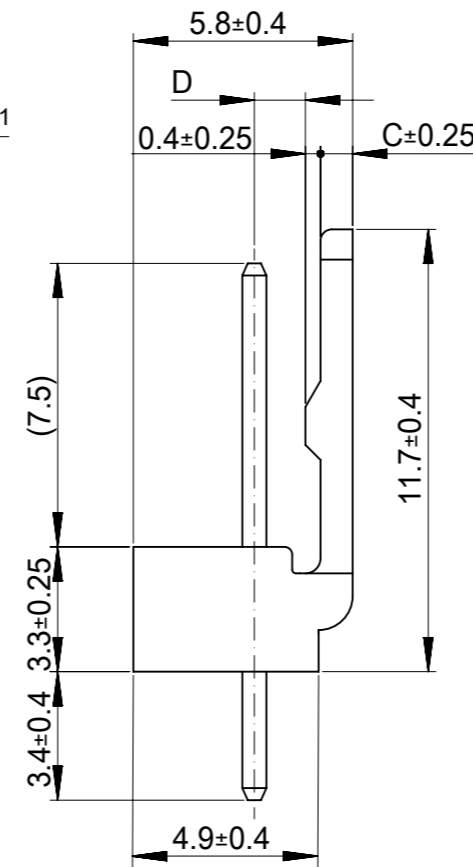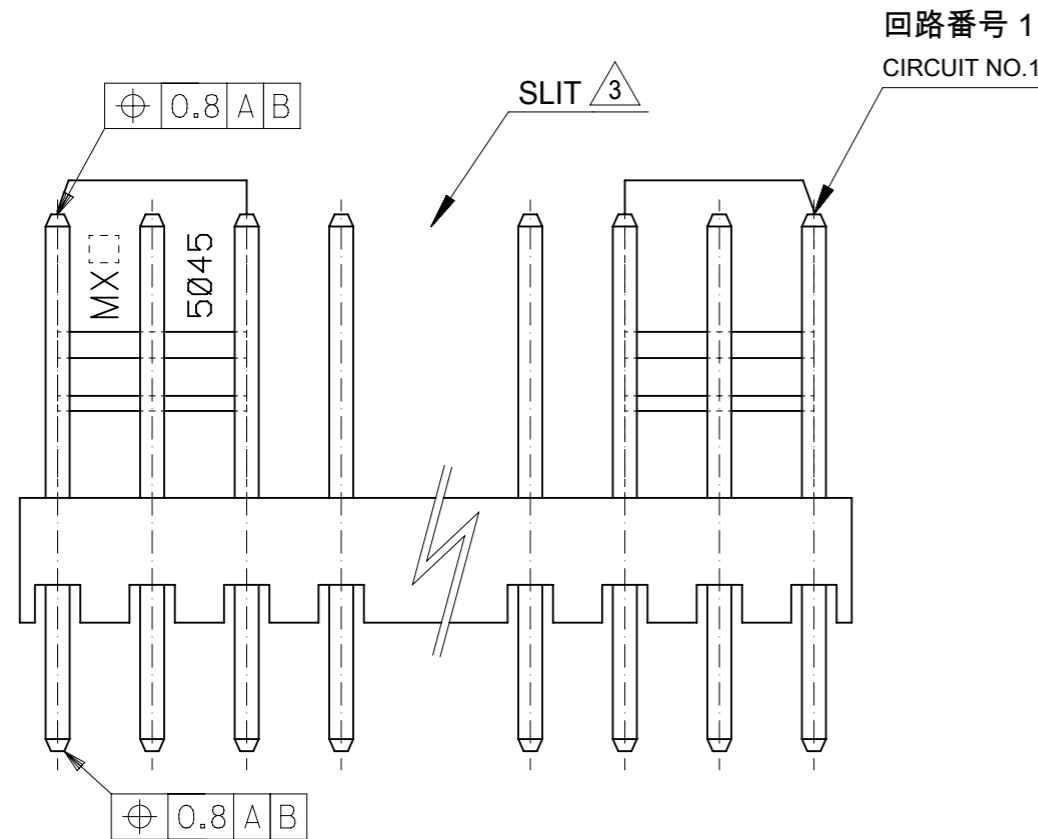

1.35	0.85	22.5 <sup>+0.2</sup> <sub>-0.4</sub>	22.5	22 11 1101	10
↑	↑	20 <sup>+0.15</sup> <sub>-0.35</sub>	20	↑ 1091	9
		17.5 <sup>+0.15</sup> <sub>-0.35</sub>	17.5	↑ 1081	8
		15 <sup>+0.1</sup> <sub>-0.3</sub>	15	↑ 1071	7
		12.5 <sup>+0.1</sup> <sub>-0.3</sub>	12.5	↑ 1061	6
↓	↓	10 <sup>+0.15</sup> <sub>-0.3</sub>	10	↑ 1051	5
1.35	0.85	7.5 <sup>+0.15</sup> <sub>-0.3</sub>	7.5	↓ 1041	4
1.2	1	5 <sup>+0.15</sup> <sub>-0.3</sub>	5	↓ 1031	3
1.2	1	2.5 <sup>+0.15</sup> <sub>-0.3</sub>	2.5	22 11 1021	2
D	C	B	A	ORDER No.	極数 CKT.

MODEL No. : 5045-\*\*AG

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
DIMENSION UNITS	SCALE	CURRENT REV DESC: OBSOLETE PART NUMBER AS PER PCN#509451			
mm	5:1	<p><b>molex</b></p> <p>MINI-LATCH 2.5 HEADER ASS'Y ST WITH LOCK GOLD PLATING</p> <p>PRODUCT CUSTOMER DRAWING</p>			
GENERAL TOLERANCES (UNLESS SPECIFIED)					
ANGULAR TOL	± 3.0°				
4 PLACES	± 0.2				
3 PLACES	± 0.2				
2 PLACES	± 0.2				
1 PLACE	± 0.2	EC NO: 686785	2021/08/30	DOCUMENT NUMBER	
0 PLACES	± 0.2	DRWN: SUGEEB	2022/02/28	DOC TYPE DOC PART REVISION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHK'D: GGA	2022/02/28	SD-5045-001	
THIRD ANGLE PROJECTION		APPR: GGA	2022/02/28	PSD	001
DRAWING		INITIAL REVISION:	2013/11/25	G1	
SERIES		DRWN: RHORI	2013/11/28	MATERIAL NUMBER	
A3-SIZE		APPR: NUKITA	2013/11/28	CUSTOMER	
5045		SEE TABLE		GENERAL MARKET	
SHEET NUMBER		1 OF 1			