DRAWING MADE IN THIRD ANGLE PROJECTION

567950 ⇔ 567950

/home/us016926/DMTECmod

| PART NUMBER | REV | FIRST USED |
|---|---|---|
| 567950-1 | B | 854040-3 |

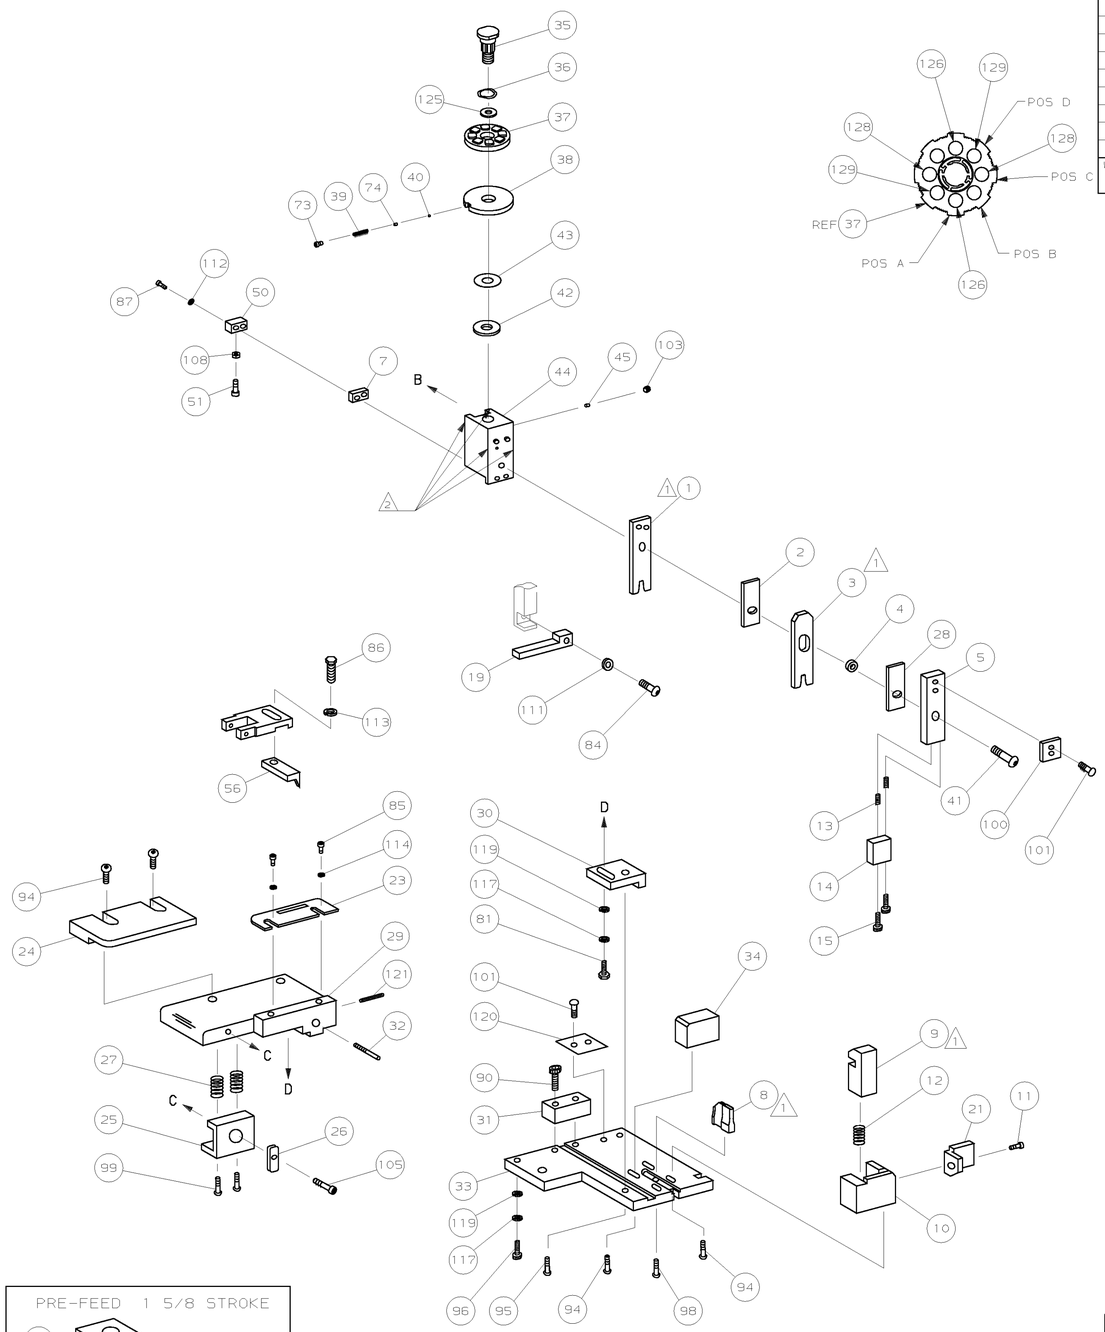


1 RECOMMENDED SPARE PARTS.
2 GREASE LIGHTLY.
3 ITEM NOT SHOWN
4 CUT TO LENGTH AT ASSEMBLY.

TERMINAL NAME: PIN & SOCKET

| PIN | SOCKET |
|---|---|
| 286740 | 286744 |

| AMP | MFG P/N |
|---|---|
| 286740 | 9745-16225-4400(926) |
| 286744 | 9745-1622P-4400(926) |

CRIMP DATA (NON-AMP TERM-AMP SPEC)

| VISIBLE PAD LTR | CRIMP HEIGHT | WIRE SIZE |
|---|---|---|
| A | .065 ±.002 [1.65 ±0.05mm] | 2500 CMA |
| B | .058 ±.002 [1.47 ±0.05mm] | 1700 CMA |
| C | .054 ±.002 [1.36 ±0.05mm] | 1200 CMA |
| D | NOT | USED |

| CRIMP | SIZE | TYPE | RANGE |
|---|---|---|---|
| WIRE | .070 [1.78mm] | F | 1200-2500 CMA |
| INSUL | .110 [2.79mm] | O | .090-.155 |

| WIRE STRIP LENGTH | TERM APPL SPEC | FEED | APPL INSTRUCTION | SET UP GAGE | LAYOUT |
|---|---|---|---|---|---|
| .171-.188 | NONE | .350 | SEE CUSTOMER MANUAL | NONE | L2096 |

SIM TO HDM NONE

| | -1 | U/M | DWG SIZE | PART NO | DESCRIPTION | ITEM NO |
|---|---|---|---|---|---|---|
| | 2 | - | C | 1-354779-8 | PIN, WIRE DISC (.3080)D | 129 |
| | 2 | - | C | 354779-4 | PIN, WIRE DISC (.3010)C | 128 |
| | | | | | | 127 |
| | 2 | - | C | 2-354779-8 | PIN, WIRE DISC (.3130)A | 126 |
| | 1 | - | A | 986950-1 | WASHER, FLAT PRECISION | 125 |
| | 1 | - | A | 217238-3 | GENERAL INSTRUCTION PACKAGE | 124 |
| | | | | | | 123 |
| | | | | | | 122 |
| | 1 | - | A | 4-21028-0 | PIN,SLT SPR(ø.093x.75)ST GDE PL | 121 |
| | 1 | - | B | 690701-2 | PLATE, SERIAL NO. | 120 |
| | 2 | - | A | 21899-2 | WASHER,FLAT(#10)S G ADJ BLK | 119 |
| | | | | | | 118 |
| | 2 | - | A | 21024-5 | WASHER, LOCK(#10)ADJ BLOCK | 117 |
| | | | | | | 116 |
| | | | | | | 115 |
| | 2 | - | A | 21024-2 | WASHER,LOCK(#4)FRONT STP GUIDE | 114 |
| | REF | - | A | 21024-4 | WASHER,LOCK(#8)FEED FINGER | 113 |
| | 2 | - | A | 21024-4 | WASHER,LOCK(#8)DEP-HOLD | 112 |
| | REF | - | A | 21024-4 | WASHER,LOCK(#8)STRIPPER | 111 |
| | | | | | | 110 |
| | | | | | | 109 |
| | 1 | - | A | 21018-5 | NUT,HEX(#6)HOLD DOWN | 108 |
| | | | | | | 107 |
| | | | | | | 106 |
| | 1 | - | A | 22353-8 | SCR,SHLD(ø.187x.25)DRAG LEVER | 105 |
| | | | | | | 104 |
| | 1 | - | A | 21009-2 | SCR,SKT SET(1/4-20x.25 LW)RAM | 103 |
| | | | | | | 102 |
| | 4 | - | A | 21017-2 | SCR,DRIVE(#2x.19)ID PLATE | 101 |
| | 1 | - | B | 819347-1 | PLATE, IDENTIFICATION | 100 |
| | 2 | - | A | 3-21002-0 | SCR,BHC(10-32x.88)DRAG | 99 |
| | 1 | - | A | 22733-8 | SCR,BHC(8-32x.38 LW)ANVIL | 98 |
| | | | | | | 97 |
| | 1 | - | A | 3-21000-8 | SCR,SHC(10-32x.88)MOUNTING | 96 |
| | 1 | - | A | 2-21002-7 | SCR,BHC(10-32x.50)SG ADJ BLK | 95 |
| | 6 | - | A | 2-21002-1 | SCR,BHC(8-32x.50)SHEAR-TERM SUP | 94 |
| | | | | | | 93 |
| | | | | | | 92 |
| | 1 | - | A | 1-21002-7 | SCR,SHC(6-32x.50)CAM | 91 |
| | 2 | - | A | 2-21000-7 | SCR,SHC(8-32x.50)SCR BLK | 90 |
| | | | | | | 89 |
| | | | | | | 88 |
| 4 | 2 | - | A | 2-21000-8 | SCR,SHC(8-32x.60)DEP-HOLD DOWN | 87 |
| | REF | - | A | 2-22603-0 | SCR,HEX HD(8-32x.31)FEED FINGER | 86 |
| | 2 | - | A | 1-21000-3 | SCR,SHC(4-40x.25)F ST GUIDE | 85 |
| | REF | - | A | 22733-9 | SCR,BHC(8-32x.50 SL)STRIPPER | 84 |
| | | | | | | 83 |
| | | | | | | 82 |
| | 1 | - | A | 3-22603-1 | SCR,HEX(10-32x.38)SG ADJ BL | 81 |
| | | | | | | 80 |
| | | | | | | 79 |
| | | | | | | 78 |
| 3 1 | 2 | - | B | 463310-4 | BLADE, STRIPPING (#18) | 77 |
| | | | | | | 76 |
| | | | | | | 75 |
| | 1 | - | A | 690603-1 | SPRING, ASSIST | 74 |
| | 1 | - | A | 23030-1 | SCR,SKT CAP(6-32x.25)CP DSC | 73 |
| | | | | | | 72 |
| | | | | | | 71 |

QTY REQD PER ASSY — PARTS LIST

| | -1 | U/M | DWG SIZE | PART NO | DESCRIPTION | ITEM NO |
|---|---|---|---|---|---|---|
| | | | | | | 70 |
| | | | | | | 69 |
| | | | | | | 68 |
| | | | | | | 67 |
| | | | | | | 66 |
| | | | | | | 65 |
| | | | | | | 64 |
| | | | | | | 63 |
| | | | | | | 62 |
| | | | | | | 61 |
| | | | | | | 60 |
| | | | | | | 59 |
| | | | | | | 58 |
| | | | | | | 57 |
| | REF | - | B | 694433-8 | PAWL, FEED | 56 |
| | | | | | | 55 |
| | | | | | | 54 |
| | | | | | | 53 |
| | | | | | | 52 |
| | 1 | - | A | 811242-2 | BUMPER, HOLDDOWN | 51 |
| | 1 | - | A | 690753-1 | SPACER, TONKER | 50 |
| | | | | | | 49 |
| | 1 | - | A | 690602-6 | CAM, PRE-FEED 1.62 STROKE | 48 |
| | | | | | | 47 |
| | | | | | | 46 |
| | 1 | - | A | 690191-1 | PLUG, NYLON | 45 |
| | 1 | - | C | 455673-1 | RAM | 44 |
| | 1 | - | A | 690125-1 | WASHER, LAMINATED | 43 |
| | 1 | - | A | 690124-1 | WASHER, RAM | 42 |
| | 1 | - | A | 690686-2 | BOLT, CRIMPER(5/16x1.00) | 41 |
| | 1 | - | A | 23241-6 | BALL, STEEL | 40 |
| | 1 | - | A | 690170-1 | SPRING, COMPRESSION | 39 |
| | 1 | - | C | 690142-1 | DISC, INSULATION | 38 |
| | 1 | - | D | 354777-1 | WIRE DISC, PLASTIC | 37 |
| | 1 | - | A | 22480-5 | WASHER, SPRING | 36 |
| | 1 | - | B | 690212-1 | POST, RAM | 35 |
| | 1 | - | B | 690786-1 | SUPPORT, TERMINAL | 34 |
| | 1 | - | C | 462544-1 | PLATE, BASE SPECIAL | 33 |
| | 1 | - | A | 690432-3 | SCREW, ADJUSTMENT | 32 |
| | 1 | - | B | 462543-1 | BLOCK, SCREW SPECIAL | 31 |
| | 1 | - | B | 455689-1 | BLOCK, STRIP GUIDE ADJ | 30 |
| | 1 | - | C | 458144-1 | PLATE, STRIP GUIDE | 29 |
| | 1 | - | C | 455888-4 | SPACER, FRONT SHEAR DEP | 28 |
| | 2 | - | A | 1-22284-0 | SPRING, DRAG | 27 |
| | 1 | - | B | 240793-1 | LEVER, DRAG RELEASE | 26 |
| | 1 | - | B | 240792-1 | DRAG, TERMINAL | 25 |
| | 1 | - | D | 856873-1 | GUIDE, STRIP (REAR) | 24 |
| | 1 | - | A | 690438-1 | GUIDE, STRIP (FRONT) | 23 |
| | | | | | | 22 |
| | 1 | - | A | 463756-1 | GUIDE, SCRAP | 21 |
| | | | | | | 20 |
| | REF | - | C | 462615-1 | STRIPPER | 19 |
| 3 | 1 | - | B | 904225-1 | JAW ASSY | 18 |
| | | | | | | 17 |
| | | | | | | 16 |
| | 2 | - | A | 1-21989-4 | SCR, SHLD | 15 |
| | 1 | - | B | 904274-1 | DEPRESSOR | 14 |
| | 2 | - | A | 6-22281-3 | SPRING, DEPRESSOR | 13 |
| | 1 | - | A | 6-22279-4 | SPRING, SHEAR | 12 |
| | 1 | - | B | 1-690461-6 | STOP, SHEAR (FRONT) | 11 |
| | 1 | - | B | 462548-3 | HOLDER, SHEAR (FRONT) SP | 10 |
| 1 | 1 | - | B | 462547-3 | SHEAR, FLOAT (FRONT) SP | 9 |
| 1 | 1 | - | C | 1-662185-6 | ANVIL | 8 |
| | 1 | - | C | 240641-6 | SPACER, DEPRESSOR (REAR) | 7 |
| | | | | | | 6 |
| | 1 | - | A | 904273-1 | DEPRESSOR, SHEAR (FRONT) SP | 5 |
| | 1 | - | B | 238011-2 | SPACER, BLOCK CRIMPER | 4 |
| 1 | 1 | - | C | 456135-7 | CRIMPER, INSULATION | 3 |
| | 1 | - | C | 455888-1 | SPACER, CRIMPER | 2 |
| 1 | 1 | - | C | 1-456404-8 | CRIMPER, WIRE | 1 |

QTY REQD PER ASSY — REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION) — PARTS LIST

| P | F | LTR | REVISION RECORD | APP | DATE |
|---|---|---|---|---|---|
| | | B1 | ECN 0150-0429-04 | TE | 4-04 |
| | | B | 0150-9584-99 | TE | SEP99 |
| | | A | REVISED | CE | 8-98 |

DIMENSIONS IN INCHES.
DO NOT SCALE PRINT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:
2 PLC DEC ±-
3 PLC DEC ±-
4 PLC DEC ±-
ANGLES ± -
SURF TEXTURE, √
REMOVE BURRS, BREAK SHARP EDGES R.015 MAX

MATL - - HT TR - - FIN - -

DR B.HIGMAN 21JUL98 APP T.ELBIN 21JUL98
CHK C.ERISMAN 21JUL98 REL - -

AMP Incorporated Harrisburg, PA 17105-3608

NAME STRIPPER CRIMPER APPLICATOR — MACHINE REF STRIPPER CRIMPER

SCALE - D DWG NO 567950 SHEET 1 of 1 REV B1

CAGE CODE 00779 — CUSTOMER AND ASSEMBLY DRAWING — RESTRICTED TO —

THIS DRAWING IS A CONTROLLED DOCUMENT.

RELEASED FOR PUBLICATION 15SEP.1999

© COPYRIGHT 1999 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC A DIST 66

AMP 1756 REV 3-92 — 05-APR-04 14:33:21 us016926