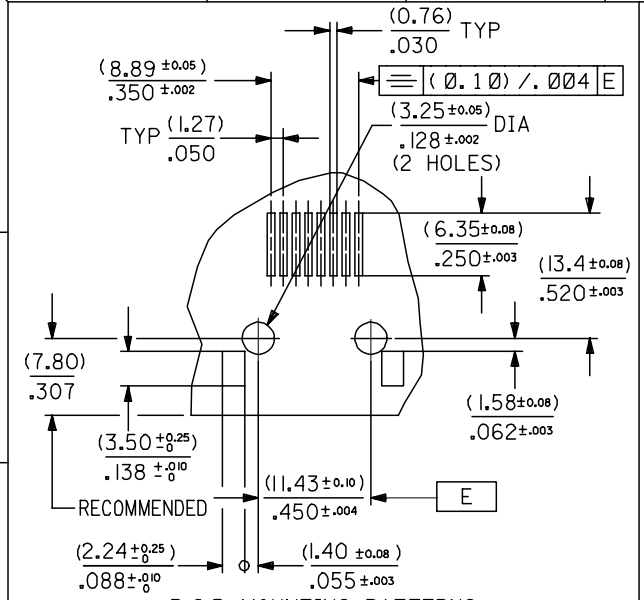

P.C.B. MOUNTING PATTERNS
VIEW FROM COMPONENT SIDE (SCALE 2:1)

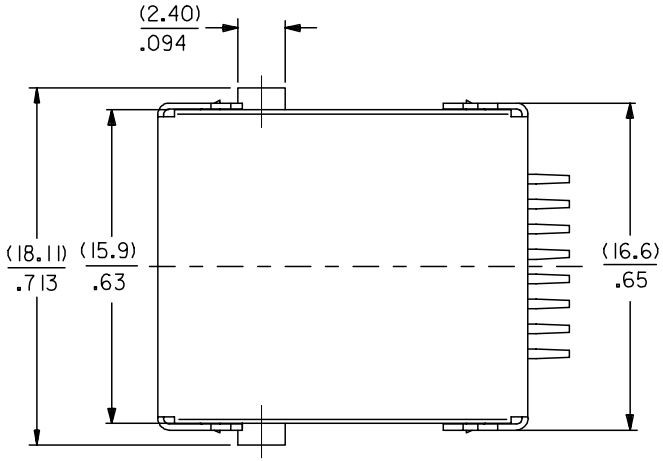

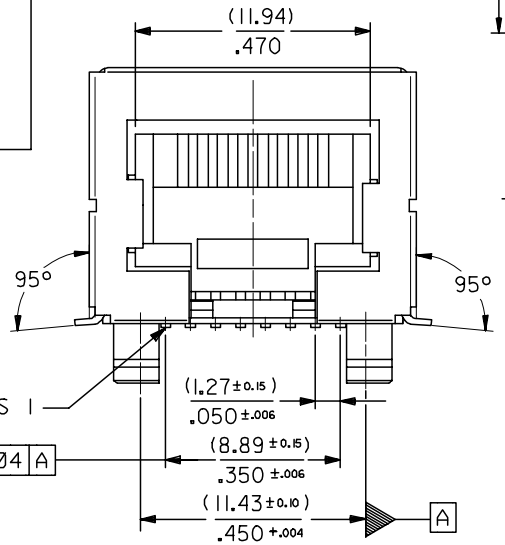

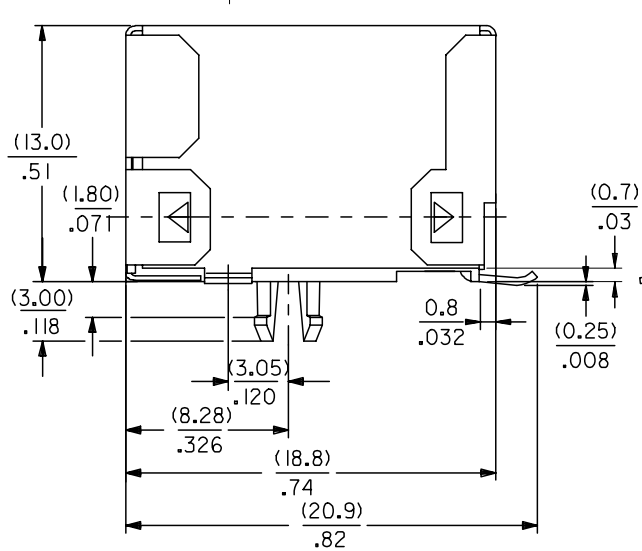

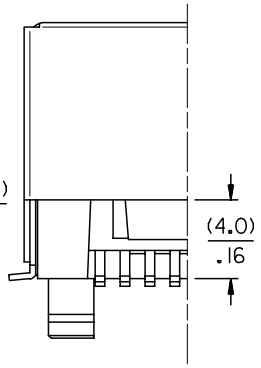

PARTIAL REAR VIEW

NOTES:

1- JACK FOR MATING WITH SHIELDED PLUG (MOLEX 95043 AND 85568 SERIES).
2- PRODUCT SPECIFICATION : PS-95122-001.
3- APPLICATION SPECIFICATION : AS-95001.
4- PACKAGING SPECIFICATION: PK-95122 SHEET 2 (BLISTER PACKAGING ON REEL)
5- P.C. BOARD THICKNESS : (1.57)/.062
6- COPLANARITY OF SIGNAL LEADS: 0.10 MAX.

TECHNICAL SPECIFICATIONS:

MATERIAL :

HOUSING: POLYAMIDE GLASS FILLED UL 94V0, COLOR BLACK.
TERMINAL : PHOSPHOR BRONZE PLATED WITH : (0.00127)/.000050 MIN GOLD IN CONTACT AREA, (0.00190)/.000075 MIN PURE TIN IN TAIL AREA, BOTH OVER (0.00127)/.000050 MIN NICKEL OVERALL.
SHIELD : BRASS PLATED WITH (0.0020)/.000078 MIN TIN.

REMOVED TEXT ERROR
EC NO: E2006-0826 2006/04/06
DRWN: DBYRNES 2006/04/06
CHKD:
APPR: EOMAHONY 2006/04/11
DESCRIPTION
REV B

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM/IN
SCALE	4:1
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY	RK
DATE	03/07/31
CHECKED BY	GE
DATE	03/07/31
APPROVED BY	MH
DATE	03/07/31
TITLE	FULLY SHIELDED SMT R/A MODULAR JACK 8 CKTS
	MOLEX INCORPORATED
MATERIAL NO.	95122-4881
DOCUMENT NO.	SD-95122-010
SHEET NO.	1 OF 1
SIZE	A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION