


Specification Sheet

Part Number: 157-00115

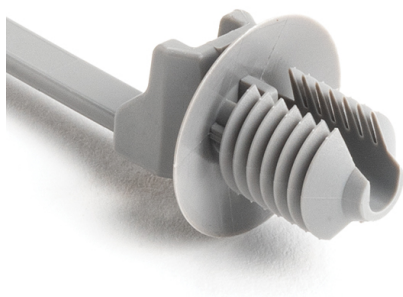

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

Initial fir tree serves as a locating feature for assistance in blind assembly applications.

Disc feature provides anti-rattle protection in high vibration applications.

1-Pc Cable Tie/Fir Tree Mount with Disc, 6.4"L, 0.30" - 0.33" Hole Dia, PA46, Gray, 1000/pkg

Article Number	157-00115
Type	T50SOSFT8E
Color	Gray (GY)
Quantity Per	bag

Product Description	One-piece mounting ties offer a complete solution by both bundling and mounting wires, cables and tubes. The fir tree mount provides low insertion force with a high extraction force. Outside serrations on the cable tie leave a smooth interior surface that's gentler on sensitive wire insulation. The unique head design allows the cable tie to firmly hold bundles as small as .06" diameter. The disc offers added protection against debris.
----------------------------	--

Short Description	1-Pc Cable Tie/Fir Tree Mount with Disc, 6.4"L, 0.30" - 0.33" Hole Dia, PA46, Gray, 1000/pkg
--------------------------	--

Global Part Name T50SOSFT8E-PA46-GY

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225

Length L (Imperial) 6.4

Length L (Metric) 163.0

Fixation Method Fir tree for round holes

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Outside Serrated

Width W (Imperial) 0.18

Width W (Metric) 4.6

Bundle Diameter Min (Imperial) 0.04

Bundle Diameter Min (Metric) 1.0

Bundle Diameter Max (Imperial) 1.4

Bundle Diameter Max (Metric) 35.0

Thickness T (Metric)	1.3
Height H (Imperial)	0.43
Panel Thickness Min (Imperial)	0.02
Panel Thickness Max (Imperial)	0.24
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	6.0
Mounting Hole Diameter D (Imperial)	0.3 - 0.33
Mounting Hole Diameter D (Metric)	8.0 - 8.5 mm
Mounting Hole Diameter D Min (Imperial)	0.3
Mounting Hole Diameter D Max (Imperial)	0.33
Mounting Hole Diameter D Max (Metric)	8.5
Disc Diameter (Metric)	16.0
Material	Polyamide 4.6 (PA46)
Material Shortcut	PA46
Operating Temperature	-40°F to +266°F (-40°C to +130°C)

Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3926909988