

# T+ and T+PRO Electrical Testers

**Safer than traditional solenoid testers  
and fully compliant with NFPA 70E<sup>1</sup>**

## Technical Data

These electrical testers have all the advantages of traditional solenoid testers, with none of the typical drawbacks. Use all 3 voltage detection methods – light, sound, and vibration, to work more efficiently in noisy environments, dimly lit areas, or tight spaces. Built-in flashlight, GFCI trip capability, and the legendary ruggedness you expect from Fluke, make these an excellent choice for most residential, commercial, and industrial applications.

The Fluke T+PRO is the choice for the demanding commercial and industrial electrician. This full-featured electrical tester includes voltage and continuity measurement, a Rotary Field Indicator, resistance, and a digital display with 0.1 V resolution.

The Fluke T+ is the basic electrical tester for residential electricians and HVAC technicians, who need a durable, reliable tool for testing voltage and continuity.



### Features and Benefits

- 3 forms of ac/dc voltage detection: light, sound, and vibration for added user protection and convenience
- Detect live voltage even when the battery is dead
- Extra heavy-duty, replaceable test leads for more flexibility and durability
- CAT IV 600 V, CAT III 1000 V rated for added user protection
- Continuity beeper
- Bright LED flashlight for work in poorly lit areas
- GFCI Trip
- On/Off switchable beeper, selectable according to your environment
- Compliant with latest NFPA 70E recommendations<sup>1</sup>

(continued on the next page)

<sup>1</sup> When used properly per Article 110.9 Use of Equipment (A) Test Instruments and Equipment.

**Features and Benefits contd.**

- Replaceable test probes for added flexibility and convenience
- Convenient probe storage on the back
- Probe holder for easier testing
- Hazardous voltage warning light for added user protection
- Test lead strap included for better test lead management
- AC/DC Voltage: 12 V to 600 V on LED bar, 10.2 V to 600 V on LCD (LCD on T+PRO only)
- Auto-off saves battery power
- Two-year warranty

**Added functionality available only on the T+PRO**

- Backlit LCD display for easier viewing
- Display resolution of 0.1 V, ideal for troubleshooting low-voltage lighting
- Resistance (Ohms) to 9.99 kOhms
- Rotary Field Indication
- Display Hold for easier viewing in hard-to-test areas


**Specifications**

<b>Temperature</b>	
Operating	-10 °C to 55 °C (14 °F to 131 °F)
Storage	-30 °C to 60 °C (-22 °F to 140 °F)
<b>Relative humidity</b>	0 °C to 30 °C (32 °F to 86 °F): 90 %
	30 °C to 40 °C (86 °F to 104 °F): 75 %
	40 °C to 50 °C (104 °F to 122 °F): 45 %
<b>Altitude</b>	
Operating	2,000 m (approx. 6,561.6 ft)
Storage	10,000 m (approx. 32,808.4 ft)
<b>Battery type/life</b>	AAA (2); 40 hours
<b>Shock, vibration</b>	Sinusoidal vibration per MIL-PRF-28800F for a Class 2 instrument
<b>Safety</b>	ISA-82.02.01 (IEC 61010-1 Mod) Second Edition, CAN/CSA-C22.2 No. 61010-1 Second Edition, IEC 61010 - 1 to 1000 V CAT III/600 V CAT IV
	Compliance to NFPA 70E <sup>1</sup>
<b>AC Bandwidth</b>	45 Hz to 66 Hz
<b>Maximum working voltage</b>	1000 V ac/dc
<b>Maximum measurable voltage</b>	600 V ac/dc
<b>Duty cycle</b>	Indefinitely for voltages up to 240 V
	For voltages between 240 V and 600 V the duty cycle is 30 s on / 300 s off
	For voltages above 240 V the tester must connect to a voltage source only for a MAXIMUM of 30 s and then disconnect for a MINIMUM of 300 s

<sup>1</sup> When used properly per Article 110.9 Use of Equipment (A) Test Instruments and Equipment.

## Specifications cont.

<b>Voltage hazard LED</b>	LEDs turn on at voltages > 30 V ac/dc ± 35 %
<b>LED voltage indication levels</b>	12 V, 24 V, 48 V, 120 V, 208 V, 240 V, 277 V, 480 V, 600 V
<b>LED voltage indication levels for Canadian version</b>	12 V, 24 V, 48 V, 120 V, 208 V, 240 V, 347 V, 480 V, 600 V
<b>LEDs</b>	LEDs turn on between 70 % and 85 % of the indicated voltage on the LED, except for the 12 V LED which turns on between 50 % and 100 %
<b>Accuracy</b>	
AC voltage	± (3 % rdg + 2 digits)
DC voltage	± (2 % rdg + 2 digits)
Resistance	± (5 % rdg + 3 digits)
<b>LCD Resolution</b>	0.1 V for voltages < 50 V, 1 V for voltages ≥ 50 V 0.01 kΩ for resistance measurement (For T+PRO Only)
<b>GFCI Test current</b>	100 V to 200 V at 20 mA to 35 mA for 1 s
<b>Standard input test current</b>	< 5 mA
<b>Size (HxWxL)</b>	3.3 cm x 5.46 cm x 19.3 cm (1.3 in x 2.15 in x 7.6 in)
<b>Weight</b>	0.28 kg (9.9 oz)

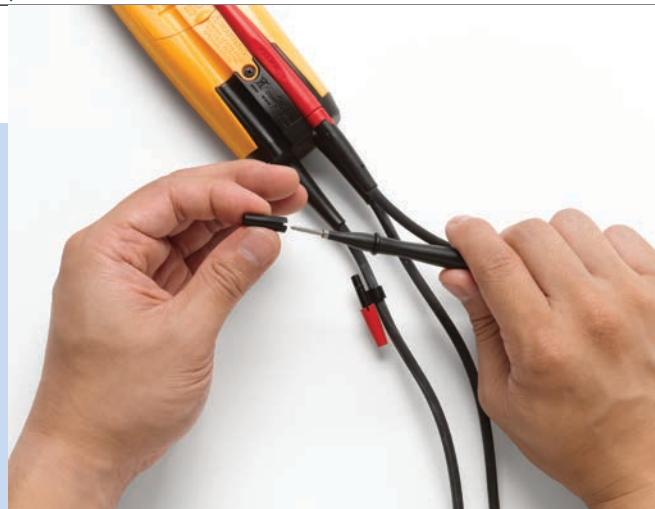

### Ordering information

<b>T+PRO</b>	Electrical Tester
<b>T+</b>	Electrical Tester
<b>T+PRO-1AC KIT</b>	Electrical Tester and AC Voltage Detector Kit

### Ordering information in Canada\*

<b>T+PRO CAN</b>	Electrical Tester
<b>T+ CAN</b>	Electrical Tester
<b>T+PRO CAN-1AC KIT</b>	Electrical Tester and AC Voltage Detector Kit

#### Includes:

- Test leads and probes
- Two AAA batteries
- Test lead strap for managing leads

### Optional accessories

- H3 Belt Holster
- TP2 replacement test probes

\*For Canadian customers, voltage indication is provided for 347 V

**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**  
PO Box 9090, Everett, WA 98206 U.S.A.

**Fluke Europe B.V.**  
PO Box 1186, 5602 BD  
Eindhoven, The Netherlands

**For more information call:**  
In the U.S.A. (800) 443-5853 or  
Fax (425) 446-5116  
In Europe/M-East/Africa +31 (0) 40 2675 200 or  
Fax +31 (0) 40 2675 222  
In Canada (800)-36-FLUKE or  
Fax (905) 890-6866  
From other countries +1 (425) 446-5500 or  
Fax +1 (425) 446-5116  
Web access: <http://www.fluke.com>

©2007-2014 Fluke Corporation.  
Specifications subject to change without notice.  
Printed in U.S.A. 5/2014 2812661B\_EN

**Modification of this document is not permitted without written permission from Fluke Corporation.**