



REVISIONS		CMPLT. BY	APPRV.
REV.	DESCRIPTION	DATE	

GE TERMINAL BLOCK  
PIN NUMBERS

2	1
4	3
6	5
8	7
10	9
12	11
14	13
16	15
18	17
20	19
22	21
24	23
26	25
28	27
30	29
32	31
34	33
36	35
38	37
40	39



CRIMP AND POKE CONNECTOR  
PIN NUMBERS  
(WIRE INSERTION SIDE)

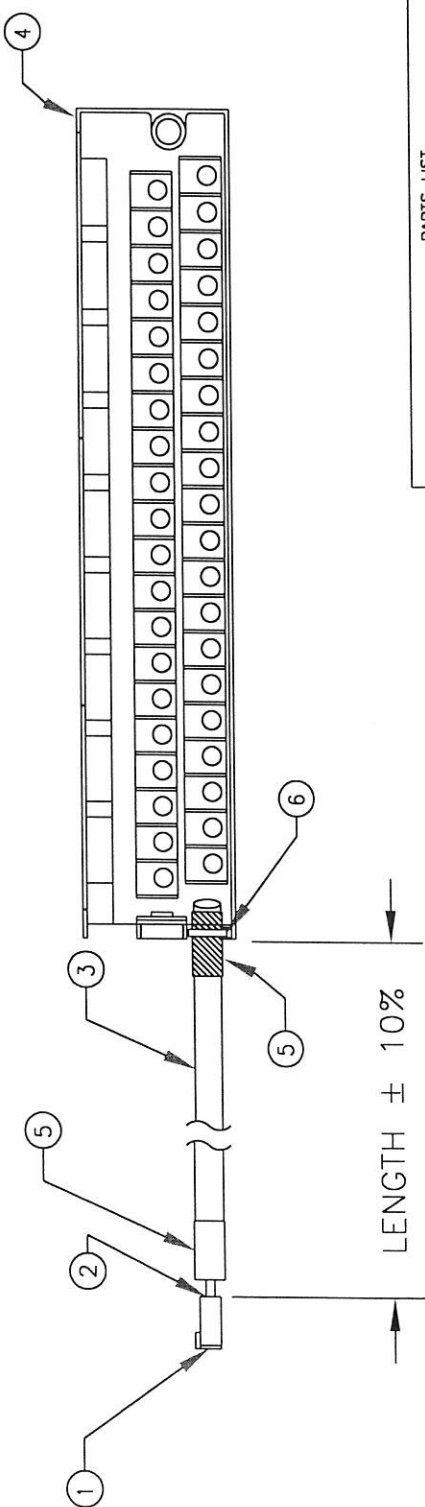

- NOTES:
- CUT CABLE AND STRIP CONDUCTORS AS REQUIRED TO ACHIEVE LENGTH SPECIFIED IN TABLE.
  - CUT UNUSED WIRE ENDS BACK TO THE JACKET BEFORE HEATING SHRINK TUBING.

BUB. #	DESCRIPTION	QTY.
1	CONNECTOR, 40-PIN, FEMALE	1
2	CRIMP AND POKE TERMINAL	40
3	CABLE, 40-COND, 22AWG	A/R
4	TERMINAL BLOCK, IC697ACC700	1
5	SHRINK TUBING	100mm
6	TIE WRAP, NYLON, 4"	6

CATALOG NO.	LENGTH (m)
998116	0.5
998117	1.0
998118	1.5
998119	2.0

**Weidmüller**  
WEIDMULLER INC.  
821 SOUTHLAKE BLVD.  
RICHMOND, VIRGINIA 23236

CAT. NO. VARIOUS  
DRWN PSH  
BY  
APPROVED  
REL. DATE 10/15/97

P/N  DWG.  PROD.  INSP.  OTHER

TOLERANCE ON :  
.X = +/- 0.508 mm  
.XX = +/- 0.254 mm  
.XXX = +/- 0.127 mm  
X+ = +/- .30"  
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS  
( ) INDICATES REFERENCE DIMENSIONS

CABLE ASSEMBLY  
GE FPA/C 9070-350

PRODUCTION RELEASE PAGE 1 SCALE: DO NOT SCALE

PROPRIETARY RIGHTS :  
THIS DOCUMENT INCLUDES DESIGN AND INFORMATION THAT IS PROPRIETARY AND CONFIDENTIAL INFORMATION OF WEIDMULLER INC. AND THIS DOCUMENT OR ITS CONTENTS MAY NOT BE DISCLOSED TO OTHERS, REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT THE WRITTEN PERMISSION FROM WEIDMULLER INC. IN RICHMOND, VIRGINIA.

DRAWING NUMBER 1100356  
REV. 0

SIZE: A SHEET 1 OF 2