DWG. NO. SD-55447-012

番号 NO.	名称 NAME	原料 MATERIAL	数量 QT'Y	仕上げ FINISH
①	ウエハー WEFAR	ナイロン NYLON	1	UL94V-0
②	ピン PIN	黄銅 BRASS	N	全体錫メッキ PRE-TINNED

注)NOTES 1.原料および仕上げ：表参照
MATERIAL AND FINISH : SEE CHART

2. キンクは、両サイド4ピンに適用。
TO BE APPLICABLE 4 PIN OF BOTH SIDE.

3. 製品番号
MATERIAL NO.
55447-**8*
極数 CIRCUIT SIZE (02 ～ 20)
無鉛メッキ＆ショートアームロック LEAD FREE&SHORT ARM LOCK
色 COLOR 0:自然色 NATURAL

4. 側面の溝は、10極以上に適用。
SIDE DITCHES MUST BE APPLICABLE OVER 10 CIRCUIT SIZE.

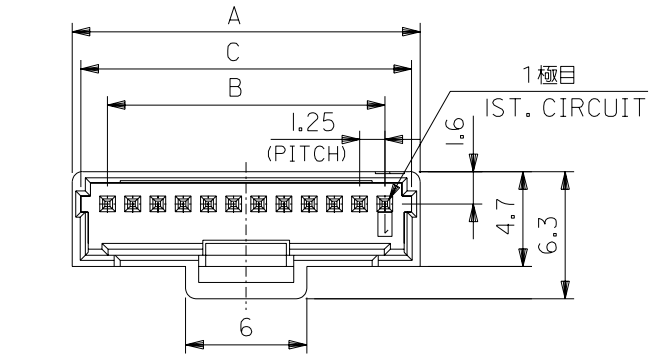

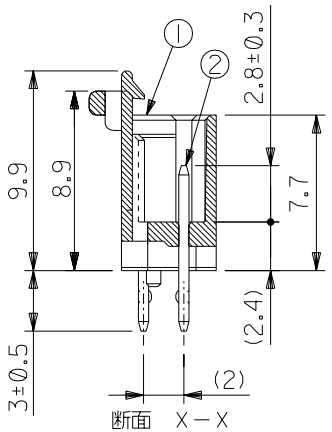

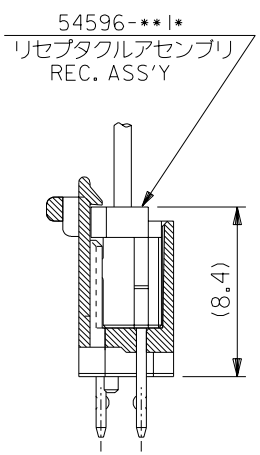

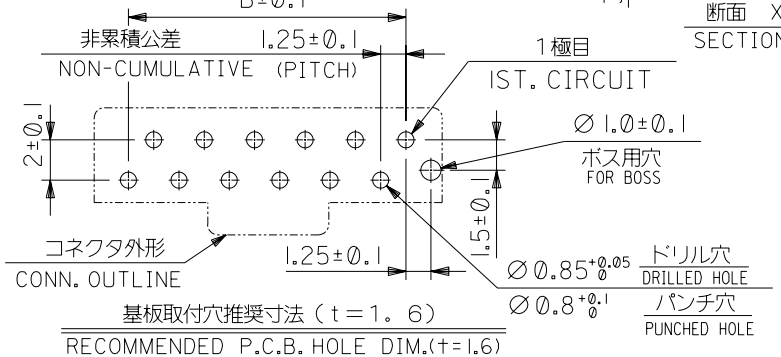

C	B	A	極数 CIRCUIT SIZE	3. 製品番号 MATERIAL NO.
26.4	23.75	27.25	20	55447-208*
25.15	22.5	26	19	-198*
23.9	21.25	24.75	18	-188*
22.65	20	23.5	17	-178*
21.4	18.75	22.25	16	-168*
20.15	17.5	21	15	-158*
18.9	16.25	19.75	14	-148*
17.65	15	18.5	13	-138*
16.4	13.75	17.25	12	-128*
15.15	12.5	16	11	-118*
13.9	11.25	14.75	10	-108*
12.65	10	13.5	9	-098*
11.4	8.75	12.25	8	-088*
10.15	7.5	11	7	-078*
8.9	6.25	9.75	6	-068*

MODEL NO. 55447-**8*

無鉛 LEAD FREE

DO NOT SCALE DRAWING

EC NO.	DRWN:	CH'K:	APPR:	DESCRIPTION	REV
				新規作成 RELEASED	
				EC NO. J20003-2786	
				DRWN: N.YOSHIDA '03/05/01	
				CH'K: M.YAGI	
				APPR: YO.ITO	0

MATERIAL 材料: SEE CHART
FINISH 仕上げ: SEE CHART
WIRE RANGE 適用電線範囲: —#—
INS. RANGE 被覆外径: —#—

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE 4-1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION
DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY | SHT | REV | REVISE ON CAD ONLY
DRAWN BY & DATE N. YOSHIDA '03/02/07
CHECKED BY & DATE M. Yagi
APPROVED BY & DATE Y. Ito
CAD FILENAME 55447012.S01
TITLE: Mini MiI 1-ROW WAFER ASS'Y (Sn) SHORT ARM LOCK TYPE
molex MOLEX INCORPORATED
MATERIAL NO. SEE CHART | DRAWING NO. SD-55447-012 | SHEET NO. 1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
SIZE B

55447012.S01

EN-02J(097) MXJ-54

DWG. NO. SD-55447-012

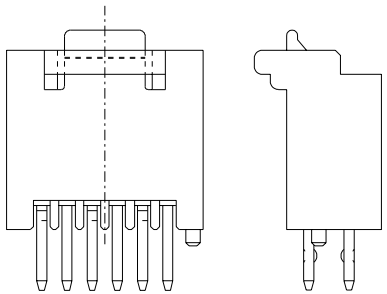

6極
6 CIRCUIT

6極のハウジング形状
SHAPE OF HS'G 6 CIRCUIT

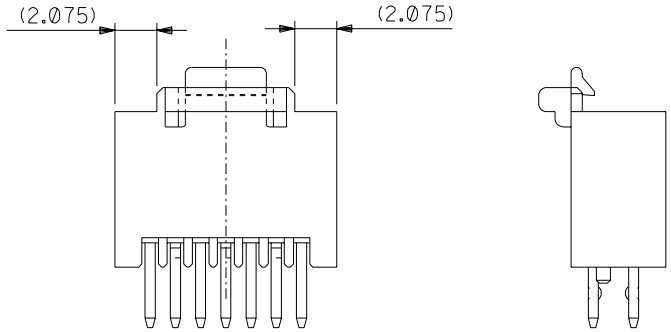

7極
7 CIRCUIT

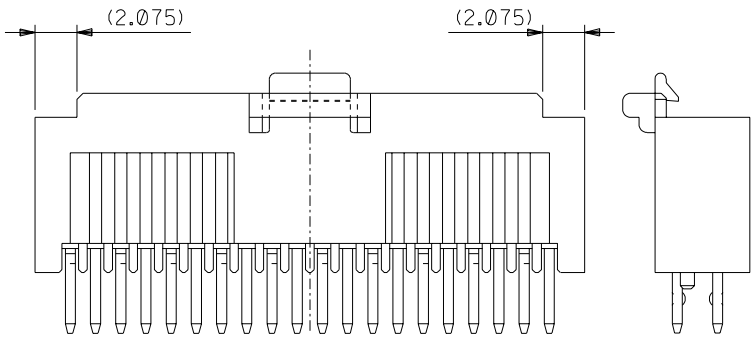

20極
20 CIRCUIT

7極～20極のハウジング形状
SHAPE OF HS'G FROM 7 TO 20 CIRCUIT

無鉛
LEAD FREE

DO NOT SCALE DRAWING

EC NO.	DRWN:	CH'K:	APPR:
EC NO.	DRWN:	CH'K:	APPR:
EC NO.	DRWN:	CH'K:	APPR:
EC NO.	DRWN:	CH'K:	APPR:
SEE SHEET 1 OF 2			
EC NO.	DRWN:	CH'K:	APPR:

DESCRIPTION

REV

MATERIAL 材料: SEE SHEET 1 OF 2

FINISH 仕上げ: SEE SHEET 1 OF 2

WIRE RANGE 適用電線範囲: —#—

INS. RANGE 被覆外径: —#—

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.2
10 OVER 以上 30 UNDER 未満	±0.25
30 OVER 以上	±0.3
ANGLE 角度	±3°

SCALE 4-1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION

DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY

SHT | REV: REVISE ON CAD ONLY

DRAWN BY & DATE: N. YOSHIDA '03/02/07

CHECKED BY & DATE: M. Nagai

APPROVED BY & DATE: Y. Ito

CAD FILENAME: 5544702.S02

TITLE: Mini MiI I-ROW WAFER ASS'Y (Sn) SHORT ARM LOCK TYPE

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART

DRAWING NO.: SD-55447-012

SHEET NO.: 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE B

5544702.S02

EN-02J(097) MXJ-54