


PCB terminal block - SPTAF 1/ 7-3,5-LL - 1864338

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, nominal current: 13.5 A, pitch: 3.5 mm, number of positions: 7, connection method: Push-in spring connection, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: green




The figure shows a 10-position version of the product

Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Finger-operated and fixable release button for very convenient operation
- ✓ Small component size for applications where space is at a premium
- ✓ Quick and convenient testing using integrated test option



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 65 pc |
| GTIN |  4 0 5 5 6 2 6 2 4 6 5 1 2 |
| GTIN | 4055626246512 |

Technical data

Dimensions

| | |
|----------------|---------|
| Length [l] | 11 mm |
| Pitch | 3.5 mm |
| Dimension a | 21 mm |
| Width [w] | 26 mm |
| Height | 10.9 mm |
| Height [h] | 13.5 mm |
| Solder pin [P] | 2.6 mm |
| Pin spacing | 5 mm |
| Hole diameter | 1.1 mm |

General

PCB terminal block - SPTAF 1/ 7-3,5-LL - 1864338

Technical data

General

| | |
|----------------------------------|-------------------|
| Range of articles | SPTAF 1/...-LL |
| Rated surge voltage (III/3) | 2.5 kV |
| Rated surge voltage (III/2) | 2.5 kV |
| Rated surge voltage (II/2) | 2.5 kV |
| Rated voltage (III/3) | 160 V |
| Rated voltage (III/2) | 160 V |
| Rated voltage (II/2) | 320 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 13.5 A |
| Nominal cross section | 1 mm ² |
| Stripping length | 8 mm |
| Number of positions | 7 |

Connection data

| | |
|--|----------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 0.75 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 1 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 0.5 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 0.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 18 |

Standards and Regulations

| | |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|----------------------------------|--------|


Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings


PCB terminal block - SPTAF 1/ 7-3,5-LL - 1864338

Drilling diagram

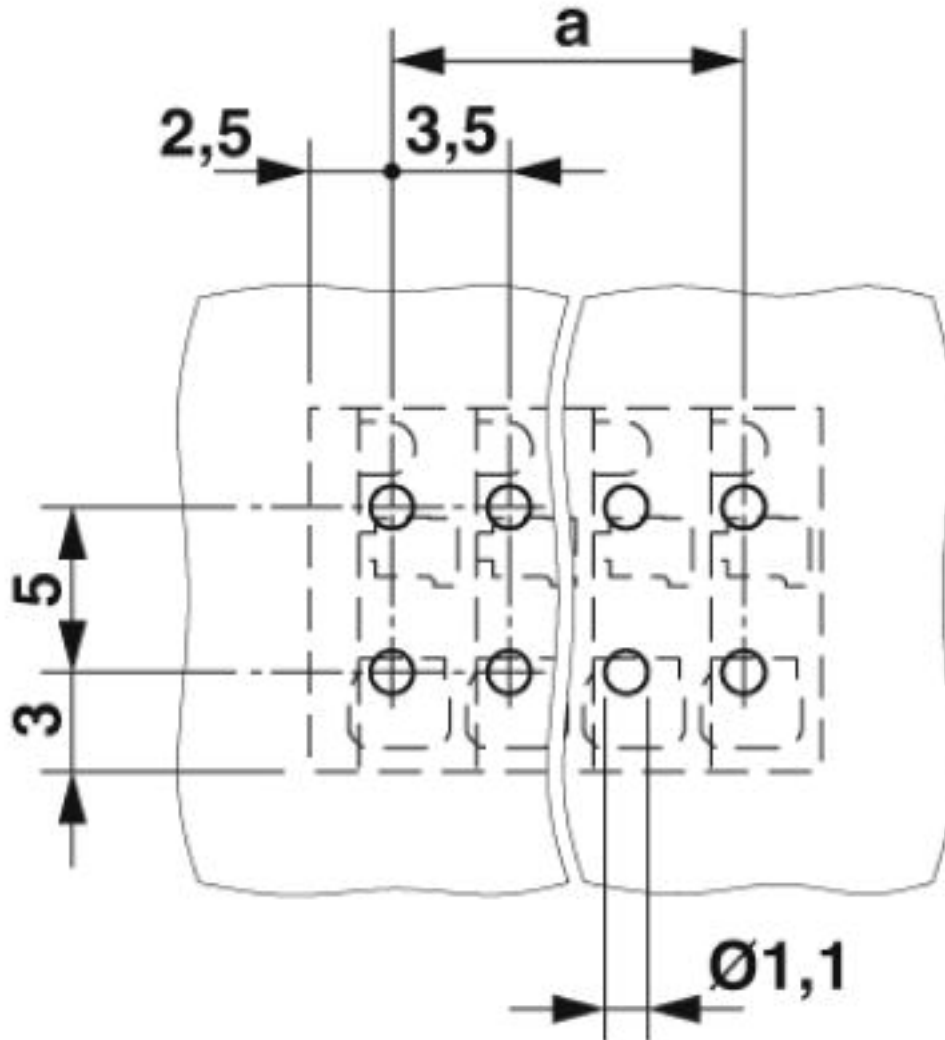

PCB terminal block - SPTAF 1/ 7-3,5-LL - 1864338

Diagram

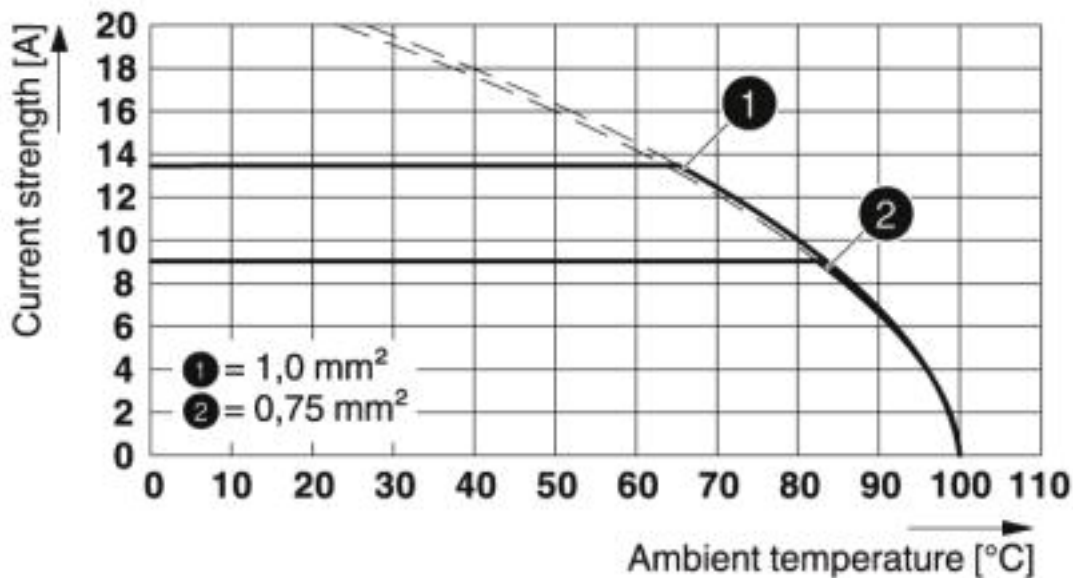

Type: SPTAF 1/...-3,5-LL

Approvals

Approvals

Approvals

IECEE CB Scheme / VDE Zeichengenehmigung / cULus Recognized


Ex Approvals


Approval details

| | | | |
|--------------------|---------------------|---|-----------|
| IECEE CB Scheme | CB scheme | http://www.iecee.org/ | DE1-61914 |
| Nominal voltage UN | 160 V | | |
| Nominal current IN | 13.5 A | | |
| mm²/AWG/kcmil | 0.2-1 | | |

PCB terminal block - SPTAF 1/ 7-3,5-LL - 1864338

Approvals

| | | | |
|----------------------------|---|---|----------|
| VDE Zeichengenehmigung |  | http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40047107 |
| Nominal voltage UN | | 160 V | |
| Nominal current IN | | 13.5 A | |
| mm ² /AWG/kcmil | | 0.2-1 | |

| | | | |
|----------------------------|---|---|-----------------|
| cULus Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E60425-20061129 |
| | B | D | |
| Nominal voltage UN | 300 V | 300 V | |
| Nominal current IN | 8 A | 8 A | |
| mm ² /AWG/kcmil | 24-18 | 24-18 | |

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>